

Australia's Top Selling Electronics Magazine

Electronics Australia

April 1985

Aust \$2.60

NZ \$3.50

Hart Beepa . . .
Checks your pulse!

Video effects
unit to build!

High definition TV:
What the future holds!

Hifi industry awards:
The winners!



Reviews:

Pioneer AM stereo car radio!
Hitachi VT-88E hifi VCR!

Bonus
164-page
Dick Smith
Catalog

The one you can't afford not to own!

AQUARIUS™

The REAL computer that starts from under \$100! You'd love to learn about computers? But thought all you could buy for your money were a few boring games. Now, we are the EXCLUSIVE Australian distributors of the new Aquarius. Not the "Claytons" computer but the perfect beginner's computer which gives you the opportunity to see what a real computer does.

Learn how to RUN YOUR OWN PROGRAMS in the Basic language! PLAY GAMES! Organise your HOUSEHOLD FILES! And much much more!

Simply connect the Aquarius to any colour TV and it's ready to teach and entertain the whole family. There's something for everyone. And what's more, you won't outgrow the Aquarius! As you need to

learn more, the Aquarius offers a huge range of add-ons that will take you into the world of electronic wizardry once offered only by the BIG ones.

With a full moving-key keyboard Aquarius is truly EASY to USE. Microsoft BASIC computer language is built right in! The easy-to-read manual and simplified instruction cards make learning a snap.

CREATE your own VISUAL EFFECTS with 16 colours and 256 built-in characters or design your own sound effects! Once you start to expand your Aquarius with the huge software and hardware range you'll find endless uses and possibilities for your system. With it's own mini expander, data recorder, memory expansion cartridges and thermal printer you'll soon wonder what the Great

Computer Secret was all about!

FANTASTIC SOFTWARE RANGE

With more than two dozen fantastic games and educational programs available now and many being developed to add to the range shortly, there's just no end to the versatility of Aquarius. Software cartridges just plug into your Aquarius and you're ready for work or play. All software programs are available separately so you can purchase only those which interest you.

AQUARIUS with built in 2K memory (expandable to 34K) and its long list of expansion units and software is the REAL computer for the price of a TOY!

1. MINI EXPANDER

Adds versatility to your AQUARIUS. Game playing is easier and more exciting with 2 detachable hand controllers and additional sound channels. Also has 2 cartridge ports so you can plug in your expanded memory cartridge into one even while you're using software in the other.

Cat X-6005 **\$69**

2. DATA RECORDER

Save your own program or utilise one of the many great software programs available on cassette with this great value unit.

Cat X-6010 **\$49**

3. MEMORY EXPANSION CARTRIDGES

16K or 32K memory cartridges give you far greater flexibility by giving your computer a much larger memory. For more advanced programming.

16K Cartridge Cat X-6015 **\$69**

32K Cartridge Cat X-6020 **\$129**

4. THERMAL PRINTER

Ideal for documenting programs, keeping records or printing charts and records. You'll probably never again see one at this price!

Cat X-6025 **\$129**


Paper roll to suit. Cat X-6026 **\$3⁵⁰**

Aquarius Colour Computer

Cat X-6000

**Fantastic
Value
ONLY**

\$99

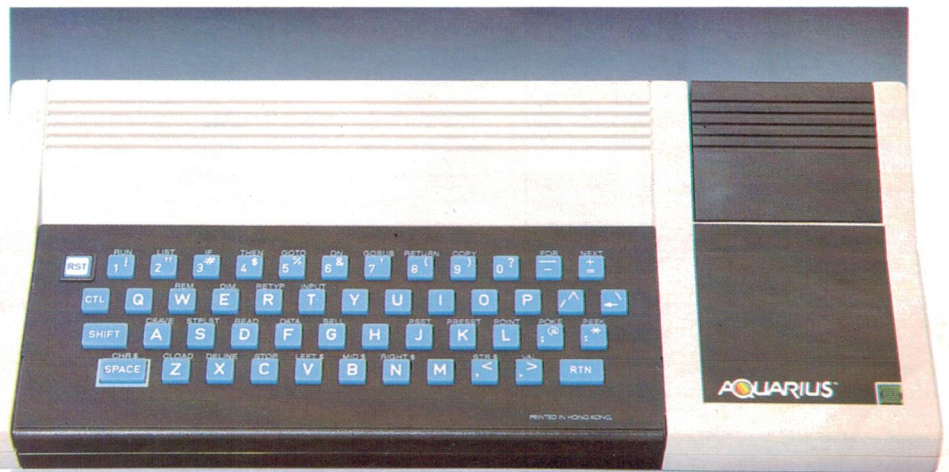


Dick Smith Electronics Pty Ltd

COMPUTERSTOP



Your one stop computer shop at your nearest Dick Smith Electronics centre.



A-923

Electronics Australia

Volume 47, No. 4
April 1985



Want to build a novel heart monitor? By picking this unit up, you can actually listen to your heart-beat. It's just the thing for biofeedback, rate testing, or just plain fun. See page 42.

Playmaster Series 200



A stubborn technical hitch has forced postponement of the third article on the Playmaster Series 200 stereo amplifier. We've now solved the problem and will publish full details in the constructional article next month (see page 48).

What's coming

Next month we intend to describe an improved version of our 50V/5A switchmode power supply and a true RMS to DC converter for digital multimeters. See also page 112.

Pioneer car stereo player



Pioneer's KE-A433AM car cassette player was the first on the market to be fitted with a decoder for the Motorola C-QUAM system, the stereo AM standard chosen by Australia. We take a close look at this new product on page 28.

Features

- 16 HIGH DEFINITION TELEVISION *What the future holds*
- 22 THE NEW SIX-INCH WAFERS *Bigger is better*
- 112 EA CROSSWORD PUZZLE *Test your knowledge*
- 113 50 AND 25 YEARS AGO *Light-powered motor*

Hifi, Video and Reviews

- 26 HIFI REVIEW *Hitachi VT-88E hifi VCR*
- 28 HIFI REVIEW *Pioneer AM/FM stereo cassette radio*
- 30 AUSTRALIA'S INAUGURAL HIFI AWARDS *The winners*
- 78 VCR HIFI SOUND EXPLAINED PT. 2 *Playback and signal processing*

Projects and Circuits

- 34 VIDEO PROCESSOR FOR HOME MOVIES *Special effects unit*
- 42 NOVEL HEART MONITOR *Listen to your heart beat*
- 50 CIRCUIT AND DESIGN IDEAS *Headlight control circuit*
- 62 VERSATILE FILM PROCESSING TIMER *Photographers' darkroom aid*
- 68 STEREO TV SOUND RECEIVER PT. 2 *Construction and setting up*
- 82 OP AMPS EXPLAINED PT. 13 *Power output stages and feedback*

Personal Computers

- 92 MPF-IP MICRO-PROFESSOR SYSTEM
For control and development


Columns

- 54 THE SERVICEMAN
Close encounters of the first kind
- 72 FORUM
Kick bad habits with subliminal messages
- 106 RECORD REVIEWS
Classical, popular, and special interest

Departments

- 3 EDITORIAL
- 6 LETTERS TO THE EDITOR
- 8 NEWS HIGHLIGHTS
- 96 BOOKS REVIEWS
- 98 NEW PRODUCTS
- 114 INFORMATION CENTRE
- 118 MARKETPLACE
- 116 NOTES AND ERRATA

Video effects for home movies

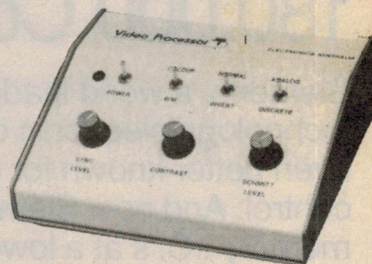

Commercial video effects units cost a fortune but this simple unit can be built for less than \$70. It provides inverse video, colour removal and lithographic picture effects. Details page 34.

SIEMENS

64K DRAM IC4164

**NOW
JUST
\$2.99*
EACH!**

While stocks last.



180,000 Components for Peanuts!

Siemens, a world leader in high technology electronic components is even better known for relentless quality control. And now Siemens is offering memory I.C.'s at a lower price.

Both 128 and 256 refresh cycle I.C. memory parts are available immediately.

Each 16 pin dual in line package delivers 180,000 components – mostly transistors and capacitors – in its silicon chip. That's more than 600 components for less than 1 cent!

Siemens Ltd.
544 Church Street, Richmond. Vic. 3121.
Telephone: 420 7318 Sydney 436 8730

Siemens Memory I.C.'s. High quality. New low price.

*Minimum order of 100 + pieces, plus sales tax if applicable.

Cash sales facilities available for non account customers.

A4/85

Editorial Viewpoint

EDITOR

Leo Simpson
B. Bus. (NSWIT)

ASSISTANT EDITOR

Greg Swain, B.Sc. (Hons. Sydney)

EDITORIAL CONSULTANT

Neville Williams
F.I.R.E.E. (Aust.) (VK2XV)

TECHNICAL STAFF

John Clarke, B. E. (Elect. NSWIT)
Colin Dawson
Robert Flynn
Andrew Levido

ADVERTISING PRODUCTION

Danny Hooper

ART DIRECTOR

Brian Jones

SECRETARIAL

Christine Millar

ADVERTISING MANAGER

Selwyn Sayers

MANAGING EDITOR

Jamieson Rowe

PUBLISHER

Michael Hannan

Editorial and Advertising Office 140 Joynton Avenue (PO Box 227), Waterloo, NSW 2017. Phone: (02) 663 9999. Advertising Sales Manager: Sel Sayers. Representative: John Oliver.

Melbourne: 23rd Floor, 150 Lonsdale Street, Melbourne, Vic 3000. Phone (03) 662 1222. Representative: Laurie Gross.

Adelaide: Charles F. Brown & Assoc. Phone (08) 332 7711. Representative: Sandy Shaw.

Brisbane: Media Services Pty Ltd, 4 Adelaide Terrace, Brisbane 4000. Phone (07) 229 6033. Representative: Fred Maybury.

Perth: Adrep, 62 Wickham Street, East Perth, WA 6000. Phone (09) 325 6395. Representative: Cliff R. Thomas.

Distribution: Distributed by Gordon and Gotch Limited, Sydney.

Registered by Australia Post — publication No. NBP0240. ISSN 0313-0150


Printed by Magazine Printers Pty Ltd, Regent Street, Chippendale and Masterprint Pty Ltd, Dubbo, NSW for The Federal Publishing Company Pty Ltd.

*Recommended and maximum price only.

Copyright. All rights reserved.



TV has great potential for the future

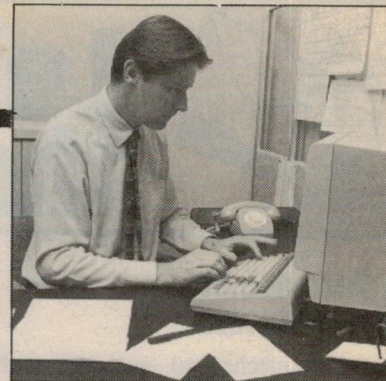

Without doubt, the most exciting technical event this year has been the symposium entitled "In the Dawn of Tomorrow" which was presented in February by the Federation of Australian Commercial Television Stations. A one-day affair, it presented the future of television technology.

On the non-technical side, there were informative addresses given by the Minister for Communications, Mr M. Duffy (per videotape), the Secretary of the Department of Communications, Mr R. Lansdowne and the Federal Director of FACTS, Mr J. Malone. These three addresses emphasised the great degree of cooperation which exists between the DOC, FACTS and the technical community at large. Which is all very encouraging.

However, it was the technical papers and the ensuing demonstrations which really stimulated discussion amongst the audience. These were delivered by technical staff from Scientific Atlanta, USA, Philips and the Sony Corporation. The first two companies' technical people described the "Multiplexed Analog Components" system for television transmission. BMAC, which is a variant of this system, has been adopted for Australia's satellite transmissions.

BMAC is a real advance for television transmissions. It is basically a system of transmitting the chrominance and luminance information in sequential form rather than simultaneously, as in the present PAL system. It makes use of a frame store into which the picture signals are fed in compressed form and then read out again, to obtain a picture of the correct 4:3 aspect ratio, with better bandwidth and complete freedom from colour fringing, colour noise and cross chrominance effects.

As well, the transmission is much more efficient in that it does not waste almost 20% of the time transmitting sync and blanking signals. It uses the extra time gained to transmit extra channels of audio (which are high quality) and Teletext. After all that, it still ends up with a system which will provide reliable picture sync even when the signal-to-noise ratio is 0dB, ie, when the carrier power is equal to the noise!

We plan to give a full technical run-down on BMAC in a future issue. In the meantime, the Department of Communications is to be congratulated for deciding to opt for BMAC. There seems little doubt that it will eventually supersede PAL for all television transmissions.

But if BMAC was exciting, Sony's demonstration of High Definition Television was absolutely startling. We saw videotapes on a screen fully 2.4 metres wide, with a 5:3 aspect ratio. There was no comparison with today's dim and blurry video projection systems. Sony's HDTV projection system was bright and astoundingly sharp, better than the presentation in many cinemas, where the focus is often far from optimum. It rivalled the definition of 35mm slides! And the picture was so wide and dramatically detailed that there was no need for panning and close-up shots. You had to really scrutinise it to see any evidence of the line structure.

The reaction of all who saw it was the same. It was incredible. The feeling was, "So what if it needs 20-odd Megahertz of bandwidth — let's have it!"

Leo Simpson



Letters to the editor

More debate on engineers

As a mechanical engineer with a hobby interest in electronics (amateur radio) I have been following the continuing debate on engineers with interest.

I am unable to comment on what is actually taught, as opposed to what should be taught to electronics students, but I do know from personal contact with assorted graduates in various fields over the years that many of them have had a good theoretical knowledge of their subject but no concept of practical application.

There are a number of reasons for this sorry state of affairs, not least of which is the quality of our education system. Our so-called education system is on a long slippery downhill slope from which it has little chance of recovery without drastic action. Any system can only be judged by its results, and the results are such that a number of universities and colleges of advanced education have felt it necessary to establish remedial English and maths classes to counter the number of semi-literate and semi-numerate students that enter their doors.

With regard to universities, they were once thought of as establishments for providing a good broad general education, with any specialisation being done via higher degrees. This concept has, of course, fallen by the wayside. We now have universities which provide two main streams of education: inconsequential studies or specialist (to the detriment of all else) studies. The former provides a degree that is not worth the paper it is (badly) written on; the latter is like a building with no foundations.

The other major problem in this area are the students themselves. Too many of them see a university degree as a meal ticket and do not really care what they do, or how they do it, as long as they obtain the meal ticket at the end of it. Moreover, too many of them see their degree as a means of getting a job which will obviate the necessity of them getting their hands dirty by indulging in any practical application of their knowledge. Tertiary educated people are too superior to indulge in anything tacky.

Finally, as a mechanical engineer of somewhat longer standing than Mr. P.

Stuart (EA, February 1985) I must disagree with his assertion that "mechanical engineers do not learn about petrol motors during their study course." The study of heat engines, a necessary part of thermodynamics, requires a working knowledge of both two stroke and four stroke internal combustion engines as well as steam engines, and such information is to be found even in text books which are considered to be basic primers in thermodynamics (the works of Joel and Rankine, for example).

In addition, in my day it was a rare student that did not attempt to utilize his newly acquired knowledge by experimenting with fuels, supercharging and the like to try to make his car or motorbike the fastest thing on wheels.

**F. Robertson,
Charnwood, ACT**

Rank triplers now available

I am writing to offer some comments on the article which appeared in the November 84 issue of this magazine concerning Rank triplers.

The comments in that issue are not in question as they basically outlined the problem that had frustrated us on many occasions and that was the periodical shortage of supply. This shortage was due to a problem the manufacturer had with the dyes used to produce this component.

Since December 1, 1983 when NEC Home Electronics Australia Pty Ltd acquired 100% interest in the company known as Rank-NEC Pty Ltd, every effort has been made to overcome the inconsistent supply.

We are very pleased to announce that new dyes have been produced and that stocks of triplers are now plentiful in each of our branches. Future ordering levels have been successfully negotiated to ensure this situation remains.

It is probably an opportune time to remind technicians that to replace faulty components with those recommended by manufacturers will always provide a far more satisfactory service for the customer, and will not create unnecessary side effects which can prove very costly to the servicing company, through poor reliability, performance or unrecoverable rework costs.

The present trade price for our tripler, part number 36501015, is \$40.17 plus tax, with a recommended retail price of \$71.06.

Thank you for this opportunity to comment and I wish you and your publication the very best for the future.

**F. Standring, National Manager,
Service and Spare Parts,
NEC Home Electronics Australia Pty Ltd.**

Give recent graduates a go

Over the last few months I have been reading with considerable interest the continuing correspondence to your August 1984 editorial. While I do not consider it a fair assessment of a graduate engineer, I took it as an opportunity to assess my own dexterity. While I knew the general theories behind each question, I admit in honesty that I could not answer a few of them with the fluency and conviction I would like, so I sat down and refreshed myself like any good engineer worth his salt should.

I can identify strongly with your graduates because I graduated three years ago and entered into a very competitive industry where I needed a start before I could truly prove my ability. I was raw, with a million ideas and theories crammed into my head as I approached my first interview for probably the same reason your graduates did. I knew the theories but it was difficult to recall precise answers fluently because of one reason nobody has yet touched on — the pressure of an interview on the inexperienced graduate.

I agree totally that engineers must keep abreast of technology and should possess a keen interest in diverse areas of the industry, but most of this comes after graduation.

As for the engineers versus technicians battle, a few words of advice from one of the young brigade of engineers; a smart engineer will advocate a harmonious relationship with his not so decorated working companion. That way he'll never need to go cap in hand whenever in need of advice. And as is the way with the world, the reverse is also true.

Finally, as you have taken engineers to task, I would like to challenge you and a good many others throughout the industry. Next time you interview a graduate or any applicant, don't assess him or her on a 30 minute "Sale of the Century" interview. For the sake of a prosperous electronics industry here in Australia, give them more than a fair chance. Too many potentially excellent engineers are not getting the chance to

prove themselves, and thus benefit the country.

This has been a valid topic for discussion and I hope that it has been as useful to others as it has been to me. It should show that one should never be content with knowledge. It's an ongoing strive for the perfection that can never be attained with complete satisfaction.

M. McGinty,
Como, WA.

Philips stereo TV receivers

I wish to pass on to you our appreciation for the article in the February edition of *Electronics Australia*, concerning the Philips stereo TV receivers. The article has done justice to the product and highlighted the fact that there is still one TV receiver manufacturer in Australia capable of designing TV receivers for the Australian market.

You may not be aware that recently these products won an Australian Design Award and that the personnel involved in the design and development of these sets at Clayton, won, in the consumer category, the Prince Philip Prize for Australian Design.

Two minor points relating to the article, which may be worth mentioning, are:

- On page 15, SCART socket: no mention is made of the five pin DIN socket on the back of the set. This socket allows constant level "un-coloured" stereo audio output for use by VCRs or hifi systems, as well as stereo audio input to the receiver. This socket is particularly useful in some situations; eg, for recording and playing back stereo audio on "stereo play-back only" VCRs equipped with a "simulcast" facility.

- On page 17, quasi-split IF stages: it is interesting to note that apart from the improvement in "buzz", this circuit gives 6 to 10dB improvement in sound

recovery, regardless of whether the broadcast is mono or stereophonic. This is particularly useful in fringe areas.

I. Maskiell,
Chief Engineer,
Home Entertainment Division,
Philips Consumer Products.

Burglar alarms for round houses

I bought the January, 1985 issue of *Electronics Australia* with the intention of building the Multi-Sector Home Burglar Alarm, but then realised that as I don't live in a circular house, it would not be of much use to me.

Will you be publishing another version later for ordinary rectangular houses?

G. H. Croll,
Slacks Creek, Qld.

Comment: Unfortunately our Burglar Alarm will only work with sectors. Other geometrical shapes cause it to attract burglars, instead of repelling them.

Accurate turntable strobe disc

Your article and project on the Turntable Strobe came at just the right time! I have been concerned with correcting my turntable speed,

but I have been concentrating on another source of error that you have not addressed in your recent article. The bar disc that you are using (in fact every available bar disc) is in error; due to the simple fact that the required number of bars is not a


whole number. For example, at 45 rpm, you need 133.333 bars, and of course 133 are used on the disc. This gives an error of 0.25%, and means that the high accuracy of your frequency source is wasted. I have developed a solution to this problem which will be of interest to all the people building your turntable kit.

The solution is to use a strobe disc with a non-integral number of bars around the circle! Sounds impossible, but it's not. If you arrange the bars in a spiral then the bars will remain steady, but they will be "swept" by a discontinuity... this is much easier to see in action that it is to describe!

There is another solution, which is preferable, and that involves a change in strobe rate. 195Hz is the lower strobe rate that yields an integral number of bars at the three standard speeds. At this rate the number of bars is 351, 260 and 150. I can supply such a disc to any of your readers who are interested in building a strobe at the 195Hz rate. To order one, write to me at 8 Bolton St, Beaumaris 3193, enclosing \$2 and a stamped self addressed envelope of at least 12cm square (to avoid folding).

There is another use for non-standard strobe discs, and that is for the early records that were produced in a variety of speeds, eg, 76 and 80 rpm. I can produce a strobe disc in any combination of (up to) three speeds and to any nominated strobe rate. (Same price: \$2 per disc.)

D. Yee,
Beaumaris, Vic.

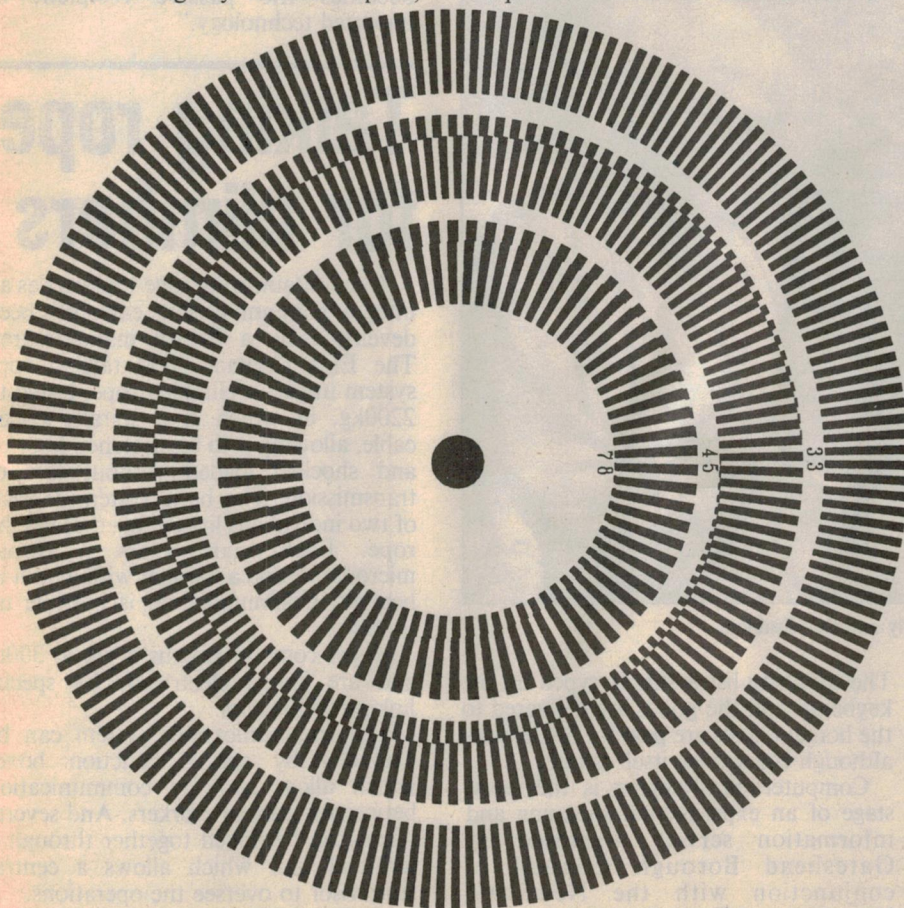

News Highlights

Conditions right for "reborn" Australian communications industry

An opportunity for a reborn Australian communications industry exists in the current climate of accelerating technological change and rapid expansion in the industry, according to Mr Ian McKenzie.

Mr McKenzie — Group General Manager of Philips Industries Holdings Limited and Vice President of the Australian Electronics Industry Association — said the volume of data transferred over telecommunications

network is increasing at a rate of 25-30% per annum throughout OECD countries.

"As a result, the demand for data communications equipment is expanding rapidly, with total industry sales exceeding \$4 billion in 1982."

The most immediate impact of these rapid changes has been to raise research and development costs dramatically, according to Mr McKenzie.

He cited the example of ITT's Pentaconta switching system, which

was developed in the 1960s for approximately \$40 million with an expected commercial lifetime of 20 years. This is currently being replaced by fully electronic digital systems with R&D costs of \$2000 million and an expected significantly shorter commercial lifetime.

Where is the Australian communications industry to position itself in this rapidly changing and expanding market?

"The huge research and development costs — coupled with the need for close links with integrated circuit manufacture, and the need to recover development costs on an increasingly competitive world market — mean that Australia's industrial options in this field are, inevitably, limited," Mr McKenzie said.

"It is in the area of terminal equipment value added networks and new markets that the greatest opportunity exists for a reborn Australian communications industry," Mr McKenzie said.

"As with an infant, the opportunities will have to be nurtured.

"Failure to identify communication industry infants with real growth potential, to support them during their infancy when the cold winds of international competitive dominance may kill them at birth, will lead to a situation where Australian industry becomes the passive recipient of imported technology."

Talking rope for climbers

A mountaineering rope that carries an integral communications cable has been developed by a British manufacturer. The Elite Contact 2000 talking rope system utilises a climbing rope, tested to 2200kg, in which is a spirally coiled cable, allowing it to be stretched knotted and shocked loaded without loss of transmission. The basic system consists of two individuals linked together via the rope. Each man wears a throat microphone and a hardhat with a built-in headset. Communication is possible up to 4km.

Ropes come in lengths of up to 300m and are joined electrically by special linking connectors.

The communications system can be extended by special junction boxes which allow two-way communication between a team of workers. And several teams can be linked together through a terminal unit which allows a central supervisor to oversee the operations.

Armchair shopping for the disabled



Teleshopping — armchair shopping for the elderly and the disabled.

At Gateshead, in north-east England, a new service allows the elderly and disabled to do their grocery shopping from the comfort of their own homes. Called "teleshopping", the new service involves the users' own television set in conjunction with a small keyboard.

The system allows the user to call up details of 1000 grocery items, 50 bakery products and 300 pharmaceutical goods.

The shopping list is simply typed on the keyboard and the goods are delivered to the home. Goods are paid for on delivery although the service itself is free.

Computerised shopping is the latest stage of an experimental shopping and information service organised by Gateshead Borough Council in conjunction with the Newcastle University and Tesco Stores.

Have Bondwell – Will Travel

The new shipment is here!
Fantastic value – that's the

Bondwell

Portable Computer: EXCLUSIVE to Dick Smith Electronics

Simply brilliant! That's the all-new Bondwell 14 portable personal computer. Small wonder it has become one of America's top-selling computers in just a few short months – and now the same thing is happening here in Australia.

It's everything you've ever wanted in a computer and much, much more besides: small enough to go anywhere with you, yet large enough to do virtually any computing job.

This incredibly powerful personal portable operates from the world-standard CP/M system: which means there will always be an incredibly large range of software available for it. For virtually any purpose.

That's if you **ever ever need** any other software: the Bondwell 14 comes with over \$1200 worth of top quality business software (including Wordstar word processing!).

Look at what else you get:

- Twin double density, double sided disk drives inbuilt (360K capacity each)
- 9in amber screen inbuilt – for minimum glare and fatigue
- Standard parallel and twin RS-232C interfaces inbuilt
- 16 user definable keys for incredibly easy use
- CP/M version 3.0 including a host of utility software – even a SPEECH synthesiser (it can read to you in English!)
- Ergonomically designed keyboard & durable cabinet for complete portability
- PLUS over all this famous Micropro bundled software: Wordstar, Calcstar, Mailmerge, Datastar, Reportstar - worth over \$1200.00!

Cat X-9000

**OVER \$1200 WORTH OF
SOFTWARE FREE!**

**ALL THIS \$2295
FOR ONLY**

*Or from \$233 deposit and \$18.23 per week over 48 months to approved applicants.

Commercial Leasing also available!

NEW: Extended Basic on disk! Cat X-9008 ONLY \$69.95






Dick Smith Electronics Pty Ltd

COMPUTERSTOP



Your one stop computer shop at your
nearest Dick Smith Electronics centre.




Winter consumer electronics show

More than 1400 exhibitors displayed their products at the 13th annual Winter Consumer Electronics Show held in Las Vegas this year. The show, held over four days in January, attracted over 100,000 visitors, a new WCES record, making this show the most heavily attended in history. The show occupied more than 9 hectares in the Las Vegas Convention Centre, Las Vegas Hilton, Riviera, and Sahara hotels.

On the computer front, "New Atari", whose booth was opened by the governor of Nevada, released their new line up for 1985 comprising the 8-bit 65XE to retail at \$120, the 128K 130XE at \$140, the 130ST at \$399, the 216K 260ST at \$499, and the top of the line 520ST which will retail at \$599. The XE series boast "Macintosh" like graphics, animation features, and 4-channel sound, whilst the second family of computers, the ST series, is based on the 16/32 bit MC68000 microprocessor. Neither unit has inbuilt disk drives, but the company is expected to offer a 3.5-inch disk drive at less than \$100 retail. (It is still unclear what Atari propose to do in Australia but no doubt these prices are somewhat lower than those that would apply should they proceed.)

Coleco Industries had plenty of Adam

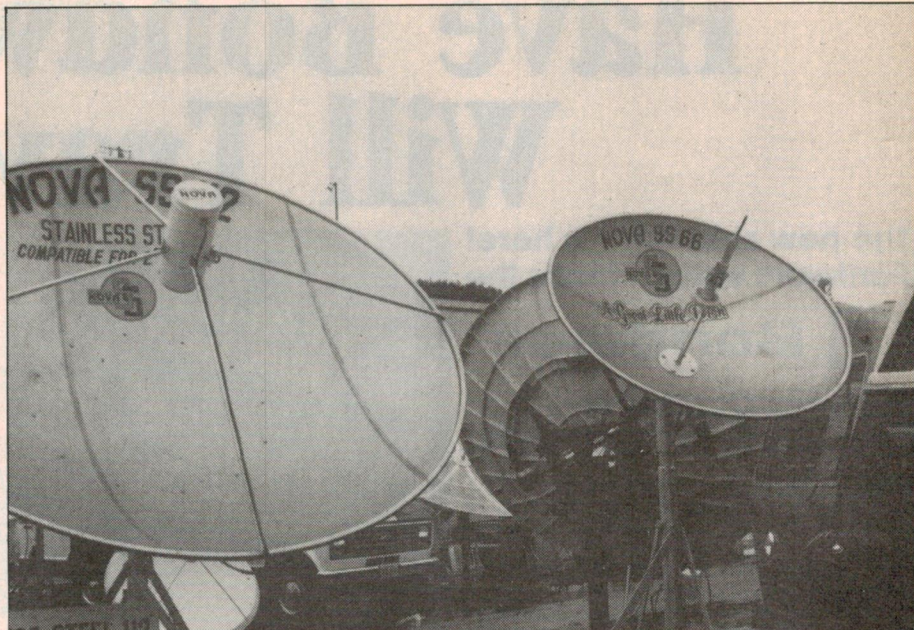

Satellite TV receivers featured strongly at the Las Vegas Consumer Electronics Show.

computers running at their booth, despite the shock decision to drop the unit only three days before the show. Coleco is rumoured to have sold between 150,000 and 200,000 units to the close out house "Odd Lot Trading Co".

The company will continue to provide software for the ill fated unit.

Video Technology, manufacturer of the Dick Smith "CAT" computer, exhibited the unit, drawing crowds with their claim of Apple software compatibility. Also featuring heavily at the show were an increasing number of compact disc units, including Yamaha's CDX2 at \$399 and the Sony CD-5 portable unit.

Also on show was the Pioneer CLD 900 which plays both video and compact discs, and a Clarion auto CD which accepts discs still inside the plastic case to save unnecessary mobile fumbling! Other manufacturers included GE, Mitsubishi, Sampo, Sanyo, and Carver.

For those wishing to record their own, Compusonics exhibited their DSP1000 system, which allows recording and customising of records onto quad density floppy diskettes using a 32-bit "personal" computer!

Video cassette recorders were again in force with several new entrants from Korea and Japan promising to rock the US market. Sampo exhibited their VR9500 unit, a front loading 2-head machine retailing for \$399, whilst Goldstar and Samsung both plan units at \$349 in April.

AM stereo had an encouraging showing with various standard receivers being exhibited by Sherwood, National, Sparkomatic, and Audiovox. Motorola demonstrated their C-QUAM encoding system for AM broadcasters. Industry sources reveal that demand for AM stereo has not been great, due to the lack of a single standard, a problem foreseen and avoided in Australia.

— Garry Crapp, Dick Smith Electronics

New optical fibre system handles five TV transmissions

An optical fibre transmission system, capable of handling up to five television transmissions simultaneously, has been released in Australia by the Video Systems Division of GEC Australia Ltd.

The new system uses a single optical fibre for analog transmissions. This makes it more economical than digital systems for the short-distance transmissions that are normally associated with security applications.

One of the system's most attractive features is its ability to transmit a television signal without processing being necessary.

In addition, the multiplex signal transmission reduces costs per channel; and the system's reduction of modal noise contributes towards pictures of a superior quality.

Major components of the system include a transmitter using an RF

amplifier, Laser Diode (LD) bias circuit, LD Module, automatic temperature and power controls, and power supply circuits.

The receiver unit includes an Avalanche Photo Diode Module (APD), bias circuit, RF amplifier and power supply circuits.

Images are produced by converting the optical input signal to an electrical signal, amplifying it, and removing the VHF band television signals.

GEC Video Systems consultants say the system can transmit for up to four kilometres without requiring the help of relay amplifiers.

The real alternative from Dick Smith Electronics!

OLIVETTI/AT&T M24 PC

Yes! The finest alternative yet. Born of the most important partnership in the history of computing.

A fast, flexible, reliable personal computer that is much more than just a superior piece of hardware.

Behind it is a commitment to a better way of managing information and communications. One that can pay off handsomely in increased productivity and profits: Because it is designed to be flexible enough to meet all your business needs - today and in the future.

Whether you use it as a stand-alone work station or in a fully integrated system, you'll find the M24 a high performance machine. And a hard working addition to your office.

Its faster processing and high resolution graphics will help make any computer task a computing pleasure. In addition, you can expect more standard features. More expansion slots. More options for future growth.

As you'd expect, the M24 is also totally compatible with the MS-DOS operating system. It runs the most popular off-the-shelf software (including Symphony, Lotus 1-2-3, Framework and Flight Simulator) with no modification.

Financial analysis. Forecasting. Budgeting. Word processing. Inventory. The Olivetti -AT&T M24PC does it all.

And its flexibility means that when it's time to expand, the M24 will actually make your computer growing pains painless.

Now the Olivetti-AT&T PC is ready for business.

Standard System

ONLY \$3995


Includes Olivetti M24 base unit with 128K RAM, one 360K disk drive, high res. green screen monitor, IBM-style keyboard, full MS DOS Operating system with GW Basic.

Expanded system \$4495

As above with an extra 360K disk drive and a total of 256K RAM.

MS-DOS and Flight Simulator are trade marks of Microsoft Corporation. Lotus 1-2-3 and Symphony are trade marks of Lotus Corporation. Framework is a trade mark of Ashton Tait.

**6 MONTHS
WARRANTY
ON SITE SERVICE
AVAILABLE
ALL SERVICE & WARRANTY
BY OLIVETTI AUSTRALIA NATIONWIDE**

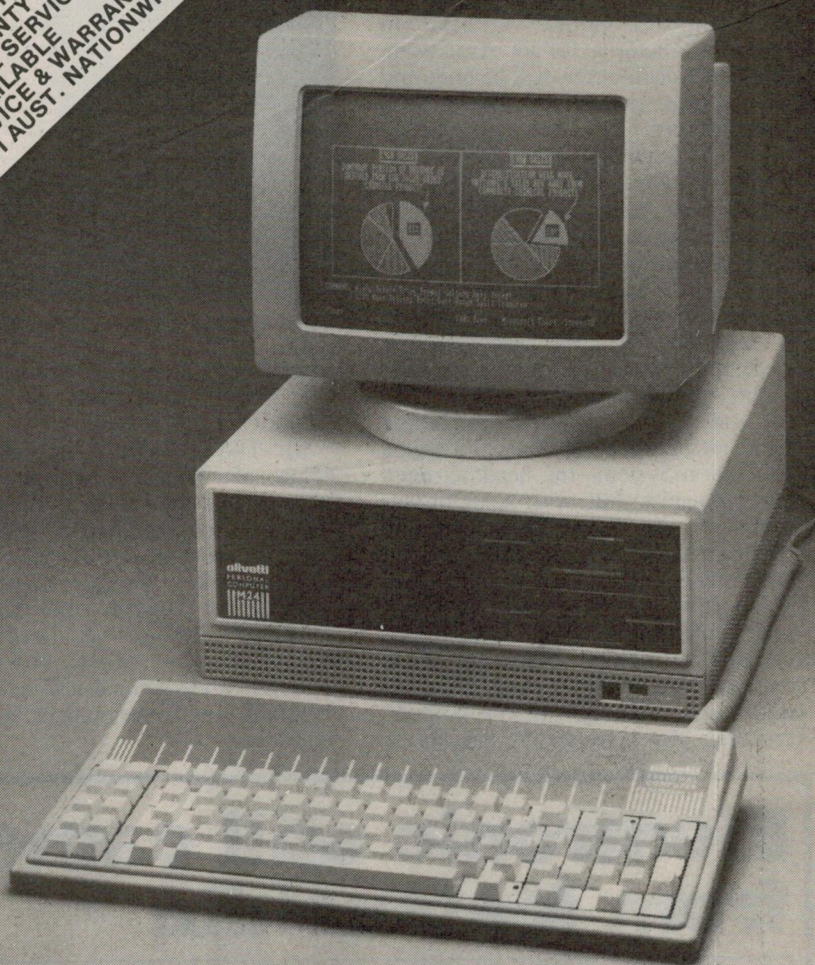

Specifications

Basic Unit:

- ☐ 16-bit CPU (8Mhz)
- ☐ Socket for optional 8087 numerical processor.
- ☐ 16KB ROM for bootstrapping, power-on diagnostics and BIOS.
- ☐ Alphanumeric and graphic monochrome and colour display controller with 4 sim-

ultaneous "shades of grey" or colours from a palette of 16.

- ☐ Asynchronous serial port (RS232)
- ☐ Parallel port (Centronics)
- ☐ Sound circuitry
- ☐ Calendar/Clock with battery
- ☐ One expansion slot (7-slot bus optional)

Display:




- ☐ 80 x 25, 40 x 25 (col. x lines) characters.
- ☐ 640 x 400 pixel resolution

Dick Smith Electronics Pty Ltd

COMPUTERSTOP



Your one stop computer shop at your
nearest Dick Smith Electronics centre.




A 9 2 7

US manufacturer to build Webster computer board

A computer board, created in Bayswater, Victoria, for an Australian-designed minicomputer, will be built and mass-marketed by a US board level manufacturer to the vast DEC-compatible systems builders' industry in the USA, Canada, United Kingdom and Europe. The product, a dual height Winchester disc controller designed by local minicomputer manufacturer Webster Computer Corporation, and incorporated in the company's PRISM minicomputer range, was launched as an independent board to the USA systems builders' market late last year.

A recent technology exchange agreement between Webster, and Sigma Information Systems Inc headquartered in Los Angeles, but with sales outlets throughout the North American and European continents, will give Sigma the rights to maximise product availability of the controller in these areas. According to the agreement, Webster will continue to address low volume sales within these boundaries and co-operate with Sigma in support and promotion of the product. Territories not covered by the agree-

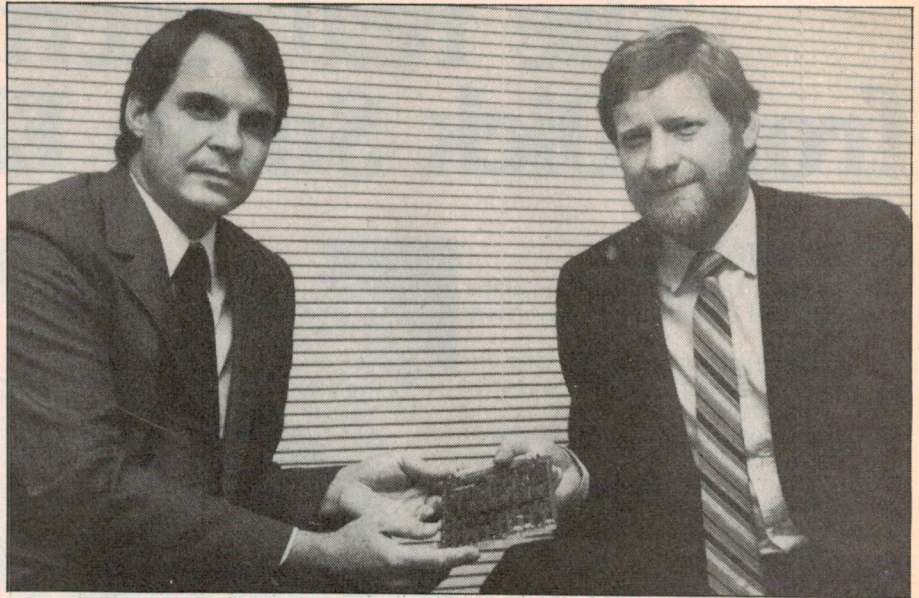

David Webster (right) with Paul R. Clarke, President, Sigma Information Systems, USA.


ment, which include Australia, Asia and the Middle East, will be addressed separately by Webster.

Mr David Webster, Managing Director of Webster Computer Corporation, recently returned this month to his Bayswater headquarters after signing the agreement in Los Angeles with Mr Paul Clarke, President of Sigma Information Systems Inc. Sigma has already indicated interest in manufacturing other new boards currently undergoing design in Webster's Research and Development laboratory, he added.

Sigma Information Systems Inc is based in the Los Angeles suburb of Anaheim, and is a manufacturer of computer chassis and board level products compatible with DEC (Digital Equipment Corporation) and IBM central processing units.

The disc controller, which Sigma will market as the SDC-RQD11-A, is the first dual height controller to implement DEC's Mass Storage Control Protocol. This means that the disc drive can communicate with the host computer using all standard DEC operating systems without software modification.

Electronic still camera from Matsushita

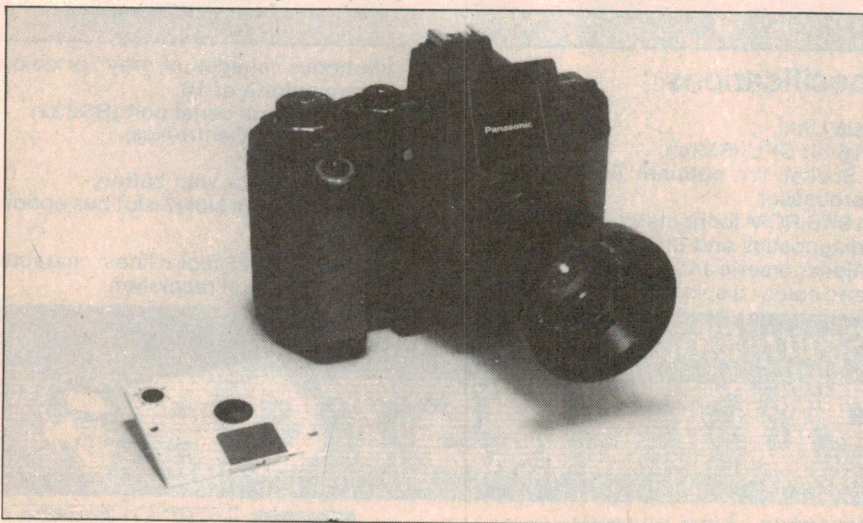

Matsushita's new electronic still camera and a "Still Video Floppy".

National's parent company in Japan, Matsushita Electric Industrial Co Ltd, has recently developed an electronic still camera (ESC) that uses a new floppy disk called a "Still Video Floppy" in place of conventional film. The ESC system is based on the company's new Interline Transfer-Charge Coupled Device (IL-CCD).

This new device features high resolution picture quality of 350 or more horizontal TV lines and 400 or more vertical lines. The total number of picture elements (pixels) is 300,000.

The floppy disk can store a maximum of 50 pictures, and the camera can take as many as seven shots per second. The technical format for image recording used in the Still Video Floppy is the standard approved in May, 1984 by 32 companies in the video and camera field.

Although final marketing plans have yet to be finalised, Matsushita is currently conducting market research in the industrial and medical fields. No plans have been announced as yet to market the camera in Australia.



Dear Customer,
As you are all aware the recent savage devaluation of the Australian dollar is real bad news for the Electronic enthusiast. As virtually all electronic components are imported from overseas you can expect to see **huge price increases over the next few weeks**. At Altronics we have been able to hold prices down during 1983/84 even though our currency drifted down approximately 15% through that period. But with this latest A\$ devastation we will be forced to increase prices shortly.
These advertised items are all ex stock at pre-devaluation prices — this is definitely your last chance — so order now.

Regards,

Jack O'Donnell

Major Competitor admits Altronics Mail Order Service "Consistently Excellent"
It appears that one of the "heavy weights" of the Electronics Industry has periodically placed anonymous "Test Mail Orders" with its competitors presumably to gauge the quality of its competition. When tackled by me as to "how we fared" the "heavy weight executive" solemnly admitted Altronics service was consistently excellent.

No prizes for guessing who!

ALTRONICS
COMPONENTS

50 Only left

FAMOUS VOYAGER CAR COMPUTER

WAS \$199

MADE IN ENGLAND! — QUALITY!

FEATURES: • Instant fuel consumption in litres/100km and MPG! (most others have only one of the above) just switch from one to the other as you drive along • Instant speed, time and other fuel data • Visual and audible excess speed alarm.

INSTALLATION: The Voyager comes complete with an unbelievable array of mounting configurations on dash under dash or stalk mount. All installation hardware is supplied (even a roll of insulation tape!) as well of course as the speed and fuel sensors. A lavishly illustrated installation manual is provided as well as a comprehensive operators manual.


AS REVIEWED
EA OCT '82 P26-28
ETI NOV '82 P26

D 1000

ONLY \$125

What the newspapers have to say
Currency crisis will hit us all in the pocket

How we have fared

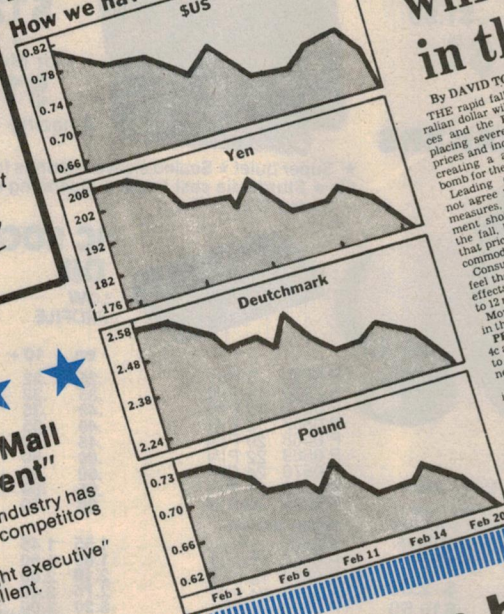

By DAVID TOMLINSON

THE rapid fall of the Australian dollar will increase prices and the Federal deficit, placing severe stress on the economy and income according to leading economists could not agree yesterday on what measures, if any, the Government should take to combat the fall, but it seems certain that prices of a wide range of commodities will rise. Consumers will inevitably feel the pinch — although the effects may not be felt for up to 12 months.

OVERSEAS debt, which now stands at 25 per cent of our gross domestic product — placing Australia in the same league as the debt-ridden countries of South America — will rise.

OVERSEAS travellers can expect to pay up to 20 per cent more for tours.

GOVERNMENT charges and charges from semi-government authorities will rise as the Government is forced to meet the cost of servicing overseas debts.

A BLOW-OUT in the Federal deficit is expected as about \$200 million is added to the cost of servicing borrowings.


TAXES must be raised or Federal expenditure cut if the Government is to keep the deficit as forecast.

Pre-devaluation bargains —
Just compare the massive savings on what you would pay with the typical industry heavy weight competition

2N3055'S SLASHED

PRIME	SPEC	S.G.S.	
1 - 9	10 - 24	25 - 99	100+
95¢	90¢	80¢	70¢

IDC CABLE




Per M 10M +

W 0616 16 way	1.75	1.65
W 0624 26 way	2.75	2.55
W 0634 34 way	3.60	3.35
W 0650 50 way	6.50	6.00

SUPERB QUALITY SLIMLINE GRAPHIC EQUALISER / AMPLIFIER

WAS \$89.50



Incredibly compact 22H x 145W x 132D. 7 Key 30W/30W Led Level meters/Qual. Japan Manf. Freq. Response 20HZ-30KHZ.....

C 9312

ONLY \$55

NICAD RECHARGEABLE BATTERIES


Premium Grade—good for up to 1000 recharges.
AA Size charge at 45-50MA
C Size charge at 160-180MA

AA Size 500 MAH C Size 1.8 AH

S 5020	AA	1-9	10-99	100+
S 5022	C	2.45	2.00	1.80
		5.95	5.40	4.98

SEALED LEAD ACID

As used in security systems, battery backup for computers etc. Premium grade long life (typically in excess of 5 years). Easy to charge.



S 5065	12V	1.2AH	19.95	16.98
S 5067	12V	2.7AH	24.95	19.98
S 5069	12V	4.5AH	34.95	26.95

MINI SPEAKER

57mm

200MW 8 OHM

Large Ferrite Magnet
Ideal replacement
speaker.


Great for hobby projects
C 0610\$1.90

NOW \$1



IMPORT SCOOP

Quality Commonwealth
Computer Fan 80MM - 240V



CAT F 1020

\$12

4

or More

\$11

Amazing Value

* Super quiet * Sealed sleeve bearings for long life * Sturdy die cast frame * Operating range -10 deg C to + 70 C

TELEPHONE CABLE


Supplied on 200m rolls, enclosed in tough PVC bags in the traditional way. Enables tangle free extraction from centre of roll through hole in the side of PVC bag.



		Per M	Per 200M Roll
W 0302	2 Pair	.50	\$59.00
W 0303	3 Pair	.60	\$69.00
W 0310	10 Pair	1.50	\$100.00

SECURITY CABLE 4 CORE

Pro quality 14/.20 used extensively in Security and Alarm Systems.




M 10+ 200M-Reel

W 0354	.50	.45	\$60.00
--------	-----	-----	---------

RAINBOW CABLE

1.27mm Pitch

	Price Per M	Price Per M 10+
W 0510 10 Core	1.00	.90
W 0516 16 Core	1.60	1.40
W 0524 24 Core	2.40	2.00



W/PROOF PA SPEAKERS

PVC 5 WATT 8 OHM

C 2010\$9.50

10 Up\$8.90

PVC 10 WATT 8 OHM

C 2015 ...\$11.50

10 Up\$9.50




MOLEX PIN SOCKETS

For use with single pins up to .5mm diam.

Make your own sockets for IC's, displays, LSI's etc.

P 0700 Pack of 100	\$ 2.00
P 0701 Pack of 1000	\$16.50

Supplied on "Break off" header pre-spaced .1 inch



IC SOCKETS DIL

LOW PROFILE

	ea.	10+	25+
P 0550 8 PIN	.25	.22	.18
P 0560 14 PIN	.35	.32	.27
P 0565 16 PIN	.40	.35	.28
P 0567 18 PIN	.40	.35	.28
P 0568 20 PIN	.45	.40	.32
P 0569 22 PIN	.60	.50	.42
P 0570 24 PIN	.60	.50	.42
P 0572 28 PIN	.65	.60	.52
P 0575 40 PIN	.80	.70	.58

WIRE WRAP

P 0580 14 PIN	1.55	1.45
P 0585 16 PIN	1.60	1.50
P 0590 18 PIN	2.10	2.00
P 0595 24 PIN	2.75	2.40
P 0598 40 PIN	3.20	3.00

ALTRONICS
COMPONENTS

PRE DEVALUATION PRICES

ALCOHOL BREATH TESTER

K1583
ONLY
\$29.95

(SEE EA
MAY 1983)



This Great Kit from EA will be a smash hit with all the smashed people at your next party. Fun to build, fun to calibrate and fun to use. More seriously, this unit could save lives.

MICROWAVE OVEN LEAK DETECTOR




Completely passive project receives microwaves via an antenna which develops a voltage across a detector diode driving the meter. Monitor your microwave oven with this easy to build kit. All components mount on single PCB, including the meter.

K1724.....(still only) **\$14.50**

High Definition Computer Monitor

There are a number of low cost 'Hobbyist' monitors around these days at prices unheard of a year or so ago. However, they all suffer from poor to medium definition or resolution—hence eye strain becomes a real headache. The situation has all changed with the 1985 release of the superb Micron Series 3. Non glare, naturally, and screen character resolution well worthy of mating up with top end personal or professional computers.

NEW Micron Series 3

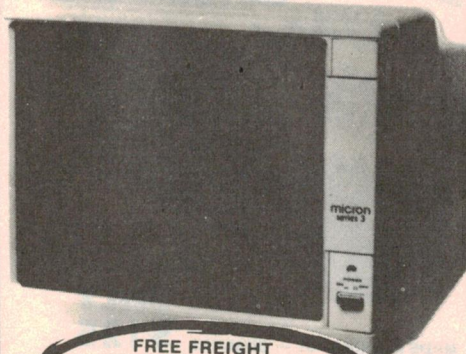

FREE FREIGHT

Exclusive to Altronics—yes we will deliver your Monitor free right to your door.

• 1050 lines resolution at centre screen • 22MHz bandwidth • Video input impedance switch allows networking use • Incredible—repeat—Incredible—Resolution.

SPECIFICATION:

Screen—Green phosphor Front Controls—Power on/off, character brightness/intensity, display centering Rear controls—Background intensity, vertical and horizontal adjustment etc. Input Impedance—Switch 75/10K

Bandwidth—10Hz-22MHz Resolution—1050 lines minimum at centre screen.

D 1115 Green Non Glare **\$179**

DIL SWITCHES

GOLD PLATE SELF WIPING CONTACTS




	ea.	10 Up
S 3050 4 Way	1.50	1.40
S 3060 8 Way	2.00	1.75
S 3065 10 Way	2.85	2.40

MINI TOGGLE SWITCHES

OEM QUALITY 250V 2 AMP RATED

6mm mounting hole
12mm x 12.7mm x 20mm (D)

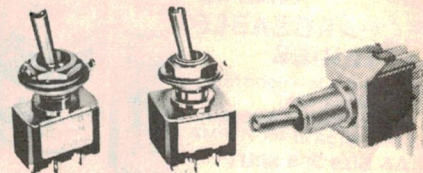

	ea.	10+
S 1010 SPDT	\$1.25	\$1.10
S 1025 SPDT Centre off	1.50	1.25
S 1020 DPDT	1.50	1.25
S 1035 DPDT PCB Mnt.	2.50	2.25

STANDARD TOGGLE

Sturdy — Reliable 125V/ 3 AMP Rating




S 1040 SPST	\$1.10
10 up	.99
S 1050 DPDT	\$1.50
10 up	1.35

LOOK

**Hardware Prices
from less than 1 cent
per piece**

SELF TAPPING SCREWS

Nickel Plated Steel




From Less Than
1 Cent each

		Pack	Price
H 1100	No. 4 x 6mm	25	.75
H 1102	No. 4 x 6mm	500	4.50
H 1110	No. 4 x 12mm	25	.95
H 1112	No. 4 x 12mm	500	5.50
H 1116	No. 6 x 9mm	25	.95
H 1117	No. 6 x 9mm	500	5.95
H 1120	No. 8 x 12mm	25	.95
H 1122	No. 8 x 12mm	500	6.95

Quality

**Plated Screws
at less than Wholesale Prices**



Whitworth — Steel Nuts and bolts
(Roundhead) Zinc Plated

	Length	Pack Qty.	Price
H 1000	9mm	25	\$.85
H 1002	9mm	500	4.50
H 1005	12mm	25	.85
H 1007	12mm	500	4.95
H 1009	25mm	25	.95
H 1011	25mm	500	6.95
H 1020	Hex Nut	30	.75
H 1022	Hex Nut	500	5.95
H 1030	S/Proof Washer	50	.95
H 1032	S/Proof Washer	500	6.95
H 1040	Flat Washer	50	.95
H 1042	Flat Washer	500	6.95

**Huge Savings with Trade Packs
(Contents 500)**

Nickel Plated Brass Spacers Packs 100

TAPPED 4BA

H 1380	Length 9mm	\$ 9.50
H 1384	Length 12mm	\$12.50
H 1388	Length 25mm	\$17.50

UNTAPPED 4BA or 1/8" Clearance

H 1359	Length 6mm	\$ 8.50
H 1365	Length 9mm	\$ 9.50
H 1374	Length 12mm	\$11.00
H 1376	Length 25mm	\$15.00

BA NUTS AND BOLTS

Bolts Cheesehead Steel, Nuts Brass



		Pack	Price
H 1045	4BA x 6mm	25	.95
H 1047	4BA x 6mm	500	5.95
H 1050	4BA x 12mm	25	.95
H 1052	4BA x 12mm	500	6.95
H 1060	6BA x 12mm	25	.95
H 1062	6BA x 12mm	500	7.50
H 1070	Nut Hex 4BA	25	1.00
H 1072	Nut Hex 4BA	500	12.50
H 1080	Nut Hex 6BA	25	1.00
H 1082	Nut Hex 6BA	500	12.50
H 1090	4BA S/Proof Washer	50	.95
H 1092	4BA S/Proof Washer	500	5.95
H 1095	4BA Flat Washer	50	.95
H 1097	4BA Flat Washer	500	6.95

RUBBER FEET Packs 100



H 0916 16mm Diam. \$8.00

STICKON TYPE

H 0942	12mm	\$ 9.60
H 0952	20mm	\$11.50



**"These Prices must
increase up to 25%
next Month"**

SOLDERLESS BREADBOARDS SUPERB I.C. TEST SOCKETS

These solderless breadboards enable circuits to be literally thrown together in an instant, yet all components remain reusable. A necessity in all research laboratories to save on expensive development costs.

• Standard 0.1 inch spacings • Accepts all LSI's semis, transistors, diodes, leds and passives • 22-30 gauge solid hook up wire for interconnections • Boards are 'Keyed' to enable easy expansion.

MINI STRIP 100 HOLES

P 1000 \$2.50

640 HOLES

P 1005 \$9.80

640 + 100 HOLES


P 1007 \$11.95

640 + 200 HOLES

P 1009 \$13.95

400 + 1280 HOLES


Accepts up to 16 x 15 Pin D.I.L.I.C's. Screw Terminals for PS Connections



P 1012 \$29.50

500 + 1920 HOLES

Accepts up to 24 x 16 pin D.I.L. IC's. Metal Backing Plate for Shielding of sensitive circuitry.




P 1015 \$45.00

VELOSTAT® 3M Co.

Non-static sheeting for storing CMOS IC'S, LSI'S etc. 1000 times better than aluminium foil. Will store up to 150 IC'S on one 225 x 150mm sheet.

H 0600 \$3.50 per sheet

VINYL BINDER

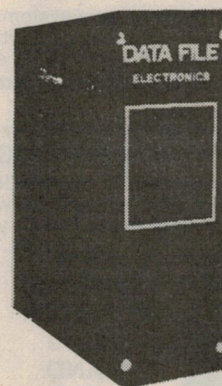


Holds 12 magazines, each on a spring out wire rod. Just the shot for each year's set of Electronics Australia, ETI or any of your favourite magazine.

Suits all A4 size publications (275 x 210). Very smart Royal Blue colour with beautiful gold embossing.

B 9999... \$5.00

UTILITY PARTS CASE

Featuring a clear plastic lid so you can tell contents at a glance. Simple slide lock, 48 partition combinations. Very sturdy ABS plastic. A must for the Technical, Handyman, Hobbyist, Collector.

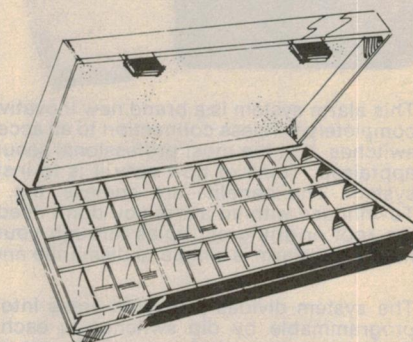


H 0449 \$12.50

TWIN RANGE LED TACHO

0-1000 RPM/0-10,000 RPM
(SEE ETI AUG 1980)

K 4324
\$24.50

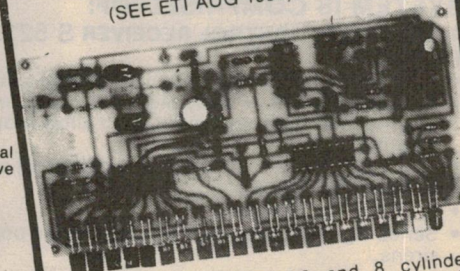

Unit suitable for 1,2,3,4,6 and 8 cylinder vehicles, 2 stroke or 4 stroke • Fully compatible with conventional, CDI and transistorized ignition systems • includes protection circuitry to prevent noise and high voltage spikes from the points and coil circuit damaging the electronics

Display flashes when over-revving occurs.
Only 3 connections required to electrical system

UHF WIRELESS SECURITY SYSTEM


Just imagine a Security/Alarm system you can install in about an hour—uses no wiring or cables and costs less than \$1 for the mounting hardware.

NEW UHF 317MHZ MICROPROCESSOR CONTROL WIRELESS SECURITY ALARM SYSTEM

Commercial grade, quality alarm systems are expensive—just phone one of the "Name" security firms and get a quote for your home—our estimate is that it will be anything up to \$1,000 just for the equipment—then there is the installation—countless holes punched through walls, miles of wiring and a day or two of installers labour and that's around \$25 per hour these days. **Hardly worth the effort is it? After all what have you got to loose? — only the Video Player, CD Player, Camera, Hi Fi, TV, Jewellery and so on. !!**

Well all that is now changed — with our brilliantly engineered BONAX Wireless Security System Read on— TAKE IT WITH YOU IF YOU MOVE


Apart from the flawless operation of the Bonax system—one of the great features is its application with rented or leased premises—lets face it, money spent on installing a wired system in your Home or Office, Factory etc. is irrevocably lost when you move on. With the Bonax you simply take it with you.

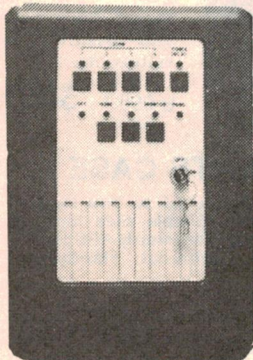

MAIN CONTROL RECEIVER
S 5210
HAND HELD REMOTE CONTROL
S 5230




REMOTE SIREN
S 5250



WIRELESS REED SWITCH
S 5220



PASSIVE INFRA RED DETECTOR
S 5240



This alarm system is a brand new inovative design that features completely wireless connection to all accessories, even the reed switches. It is the most professional security system we've ever appraised. Think of how easy it is to install a 'Wireless' alarm system. The benefits are endless, e.g. arming your Flat or Townhouse with an alarm you don't need to run wires through the roof or drill great holes through your walls. When moving house the alarm is simple to dismantle and re-install elsewhere.

The system divides protected areas into four different zones, programmable by dip switches in each transmitter/detector. **Pocket remote control** can simply arm or disarm any zone i.e. alarm your house perimeter from your bedside when retiring etc. this allows essential protection in some zones while cancelling other zones as desired. Each transmitter/detector unit can be programmed into interior or perimeter zone. Zones can be programmed for instant or delayed trip. The system has a built-in ear piercing siren for intrusion and panic alarm signals. It also has another dry relay output with normally closed, normally open contacts for connecting to other alarm reporting devices such as telephone dialer, additional outdoor siren etc.

SYSTEM IS COMPRISED OF:

4-ZONE MAIN CONTROL RECEIVER S 5210 \$299.00

FEATURES:

- Wireless reception of external or internal sensors or detectors.
- Selectable home or away modes for selecting internal and external arming or just external to allow movement inside the building.
- Built in Piezo electric siren gives different signals to indicate different functions.
- N/O + N/C Contacts.
- Sends signal down power line to activate one or more remote sirens.

The main control receiver runs on 250V AC with a 12V 1.2AH battery for emergency backup. All other units with the exception of the line carrier, run on a 9V battery each. The average life expectancy is approximately one year. System works around the 317MHz frequency where there is less chance of false alarm. The range of the unit is nominally 80 metres in open space.

ALARM AND INDICATION SOUNDS

Intrusion Alarm — Panic Alarm — Arm Tone — Disarm Tone — Exit Click Tone — Monitor Tone — Tampering Alarm.

DETECTOR/TRANSMITTER UNIT (REED SWITCH) S 5220 \$39.50

Suitable for Windows and Doors

This consists of an enclosed reed switch and compact UHF transmitter and a removable enclosed magnet. The unit is at rest when magnet and reed are side by side (within 25mm or 1 inch). When the magnet is moved away more than approximately 1 inch the alarm signals to the Main Control Receiver and the alarm is sounded. In practise the Reed/transmitter is mounted on the door or window frame with the magnet on the moving door or window.

PASSIVE INFRA RED MOVEMENT DETECTOR S 5240 \$99.00

Ideal for the lounge room, family room or hallways e.g. anywhere where an intruder is likely to pass through. Mounts up on the wall or on top of bookshelves etc. Detects movement within an area of 9M by 9M by sensing intruder body heat movement through the protected area. Will not false trigger with the family cat or curtain movement etc.— as is the case with the cheaper Ultrasonic alarms.

REMOTE PIEZO SIREN

\$89.00

This unit is an optional line carrier receiver. Receives signal through 'AC' line i.e. it would ideally be located in, say, the roof space and plugged into mains power.

HAND HELD CONTROL TRANSMITTER UNIT S 5230 \$39.50

A real joy to use— keep it at the bedside table—allows you to say alarm the house perimeters when retiring or you can take it with you when you go out, arming your system after you lock the door. Unit is a function control transmitter—to send 4 different signals.

Off—To disarm the system before entering. **Home**—To instantly arm the system with 'perimeter' detection only. **Away**—To arm complete system after a given exit delay time of about 40 sec.. **Panic**—To start an emergency signal whenever needed, in any mode.

WILL IT INTERFERE WITH MY NEXT DOOR NEIGHBOUR IF HE ALSO INSTALLS A BONAX ?

Fortunately no — each system is custom coded by the owner when commissioned The chances of him programming the same code are non existant—in fact it is quite feasible to have a whole apartment block fitted out with an individual Bonax System in each apartment.

COMPLETE SYSTEM

S 5200 \$599

TO SUIT AVERAGE HOME
Package Consisting of:

One S 5210
Two S 5220
One S 5240
One S 5250
One S 5230
One complete set of Batteries

Master Reeds
Passive IRD
Siren
Remote

NSW	QUEENSLAND	VICTORIA
CITY David Reid Electronics 267 1385 Jaycar 264 6688 D. C. KLEY 211 0191	CITY DeLoud P/L 2296155 SUBURBAN FORTITUDE VALLEY McGrath Electronics 832 3944 St. Lucia Electronics 523547 SALISBURY Colourview Wholesale 2753188 SLACKS CREEK David Hall Electronics 2088806 TOOWONG ECCO Technics 3710879 COUNTRY CAIRNS Thompson Instrument Services 512404 BUNDABERG PM Electronics 728 272 GLADSTONE Purley Electronics 724321 NAMBOUR Nambour Electronics 411604 PADDINGTON Jacques Electronics 3698594 PALM BEACH The Electronic Centre 341248 ROCKHAMPTON Purley Electronics 21058 TOOWOOMBA Hunt Electronics 329677 TOOWNSVILLE Solex 722015	CITY Active Electronics 602 3499 All Electronic Components 662 3506 MaGraths Electronics 347 1122 SUBURBAN BENTLEIGH Absolute Electronics 557 3971 BOX HILL SOUTH Eastern Communications 288 3017 CHELTENHAM Talking Electronics 550 2386 DONCASTER Clipstone Electronics 84 2868 FOOTSCRAY Acron Electronics 689 1911 SOUTH CROYDON Truscott Electronics 723 3860 COUNTRY BENDIGO K.C. Johnson 41 1411 MILDURA Electronic and Digital Services 23 3380 MOREWELL Morewell Electronics 34 6133 SHEPPARTON GV Electronics 21 8866
COUNTRY ALBURY Webb Electronics 25 4066 BATHURST The Electronics Shop 31 4421 BROKEN HILL Crystal TV 4803 COFFS HARBOUR Coffs Harbour Electronics 52 5684 COFSBRO Tomorrow Electronics 24 7246 KURRI KURRI Kurri Electronics 37 2141 NEWCASTLE D.C. Systems 69 1625 George Brown & Company 69 6399 Southern Communications 21 4011 ORANGE MW Electronics 626 491 PENRITH Acorn Electronics 21 2409 PORT MACQUARIE Hall of Electronics 83 7440 RAYMOND TERRACE Albark Electronics 87 3419 RICHMOND Vector Electronics 78 4277 TAMWORTH Landlink Communications 65 4622 TENTERFIELD Nathan Ross 36 2204 D. C. KLEY TES Electronics 96 4144 WINDANG Madjenk Electronics 96 5066 WARRAMONG M & E Electronics Communications 77 5935 WOLLONGONG Newtek Electronics 27 1620 Vimcom Electronics 28 4400	SA CITY Force Electronic 212 2672 Protronics 2123111 Gairard & Goodman 223222 SUBURBAN BRIGHTON Brighton Electronics 296 3531 CHRISTIES BEACH Kew Electronics 382 3366 KESWICK Freeway Electric Wholesalers 297 2033 PROSPECT Jensen Electronics 269 4744 REYNELLA Force Electronics 381 2824 COUNTRY MT. GAMBIER South East Electronics 250 034 PT. LINCOLN West Coast Elect Supplies 82 5802 WHYALLA Eyre Electronics 45 4764	WA COUNTRY ALBANY BP Electronics 41 2681 ESPERANCE Esperance Communications 171 3344 GERALDTON K.B. Electronics & Marine 21 2176 KALGOORLIE Todays Electronics 21 2777 MENDURAH Kentronics 35 3227 DYK BATHCHEM W & J Pease 81 1132
ACT CITY Electronic Components 80 4654 Scientra 54 8334 Australia 47 5172	TASMANIA HOBART D & I Agencies 34 7877 George Harvey 342233 LAUNCESTON George Harvey 31 6533 LEGANA Frank Beech Electronics 301379	NT DARWIN Ventronics 81 3491 ALICE SPRINGS Ascom Electronics 52 1713 Farmer Electronics 52 2929

The promise of . . . **High definition TV**

Within five years, high definition television should become reality in Japan. Coupled with direct satellite broadcasting, cable TV and large flat panel displays, the new technology signals a communications revolution.

by **GENE GREGORY***

**Professor of International Business, Sophia University, Tokyo.*

The first two generations of television technology originated in Europe and America. The third generation — high definition television (HDTV) — will bear a heavy "Made in Japan" imprint. It promises a revolution in the way we view television.

On January 14, 1984, the Japan Broadcasting Corporation (NHK) demonstrated a new HDTV system that uses considerably less bandwidth than previous HDTV technologies. With this demonstration, NHK engineers achieved a breakthrough that may eventually prove to be as important as the invention of colour broadcasting.

The introduction of this new band-compression technology constitutes a major step forward in the long march of the television industry. Stated simply, the more lines a television system has, the sharper and more detailed is the picture it will produce. In the language of the

television engineer, the greater the detail, the higher the definition.

The definition of a TV picture is a function of the number of scanning lines across the screen inside the receiver's cathode ray tube. After more than a decade of research and development, RCA set the current US standard with the introduction of the 525-line NTSC system in 1940. In Europe, a somewhat sharper image was obtained by the 625-line German PAL and the 819-line (black and white) French SECAM systems after World War II.

Then in 1981, at the Society of Motion Picture and Television Engineers, representatives of NHK and a group of Japanese equipment manufacturers unveiled the working prototype of a high definitive television (HDTV) system using 1125 lines, more than twice the present American standard. Using a somewhat larger

screen width, the new HDTV picture contains five times as much video information as a conventional one.

Excessive bandwidth


The main problem, however, was that to transmit this information, the original NHK system required 30MHz of video bandwidth, which is equivalent to the total broadcast spectrum of five VHF or UHF television channels in the US. In other words, a country that has five conventional television channels could have only one HDTV channel if no additional channels were available under international conventions. Since the broadcast spectrum is limited, the bandwidths available for use in each country are limited by international considerations. These considerations virtually precluded the introduction of HDTV in its original form.

NHK's multiple sub-Nyquist sampling encoding (MUSE) system overcomes this obstacle, thus clearing the way for the third generation of television. This process squeezes television signals into a channel less than half the normal size using special circuitry at the transmitter and in the television receiver.


By overcoming the voracious appetite for bandwidth, NHK engineers capped a research program that began in 1968 with the fundamental question: given the physical limitations of visual perception and normal, comfortable viewing distances, what should the TV picture be like for optimal human comfort and information reception?

After a series of tests, it was determined that the preferred viewing distance is about four times the height of the screen, and that our eyes resolve about one minute of arc. This translates into a picture made up of 1750 lines. But since even for a completely new system the bandwidth required is impractical, NHK engineers finally settled on 1125 lines, transmitted at 30 frames (or 60 fields) per second, and a 20MHz luminance bandwidth. And for better, more comfortable viewing, a larger screen with a 5-3 aspect (width to height) ratio was established as the ideal.

Once these main specifications had been determined, everything had to be re-invented. A high resolution camera tube — the 1-inch (2.54cm) diode-gun

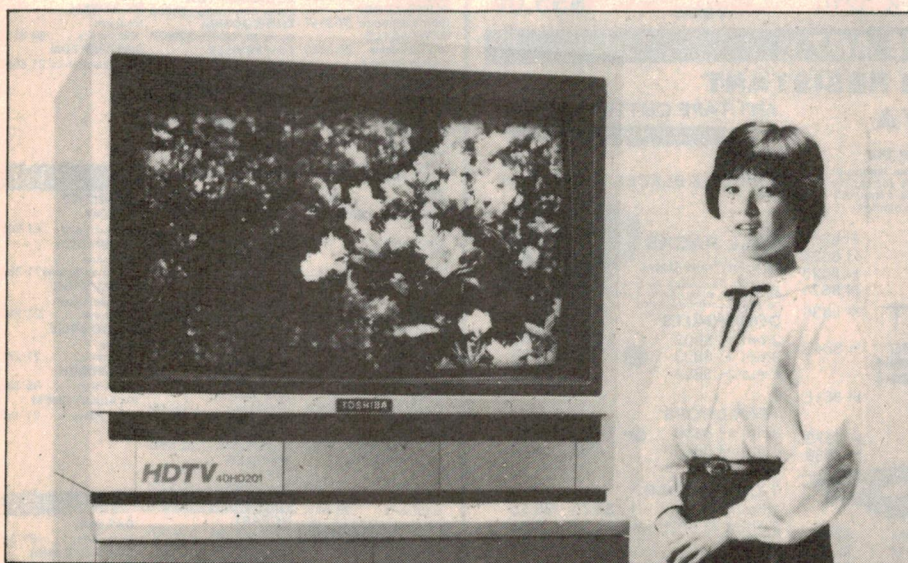

Note the new aspect ratio of this HDTV receiver from Toshiba.

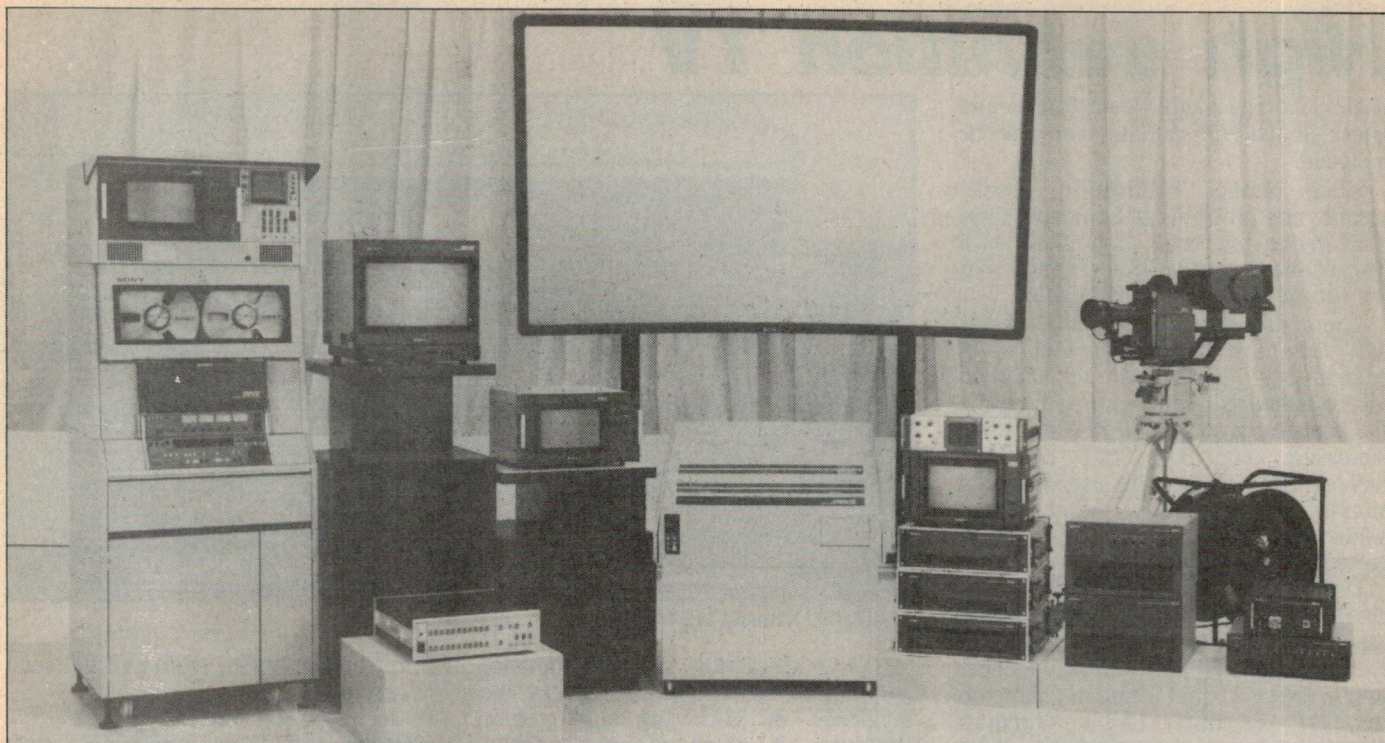

Sony have produced a whole range of HDTV equipment, including projection TV.

impregnated-cathode Saticon (DIS) — was developed and made available to leading video manufacturers for production engineering. A three-tube colour camera using DIS was produced with the necessary 1125 scanning lines and frame rate, including circuitry to correct registration errors at 570 points in the picture. At present, given pick-up tube limitations, current camera technology is just barely able to produce a satisfactory HDT image with studio-type cameras.

At the receiving end, a new series of 30 to 55-inch high-definition picture tubes has also been developed, upstaging experiments in flat-screen technology. Other new developments include a 70mm laser telecine to convert film pictures into HDTV television signals; new equipment for program production; and terrestrial and satellite transmitters. This, in turn, meant the redesign of videotape recorders used in broadcasting.

Parallel development

Two parallel developments in television broadcasting are critical to the ultimate success of HDTV: direct satellite broadcasting and digital signal processing. In fact, direct satellite broadcasting is the key to high definition television. To test that key, NHK put an experimental medium-scale broadcast satellite, "Yuri", or BSE, into orbit in April 1978.

Based on these experiments, the world's first operational direct broadcasting satellite, the BS-2a, was put into orbit on January 23, 1984, within days after the announcement of the

bandwidth compression breakthrough, adding powerful thrust to the television revolution and the emergence of new information systems of which television is a critical component.

At present, due to the breakdown of two of the three transponders of the BS-2a satellite, NHK is operating on only one channel. This services remote mountainous areas, outlying islands and a million or so households located in congested urban districts among high buildings. Direct satellite broadcasting will expand in August 1985 with the scheduled launching of the BS-2b and is expected to be ready for HDTV broadcasts when the larger four-channel BS-3a goes into geostationary orbit in 1988. Although the final decision on the timing of the first HDTV transmissions has yet to be made, it is generally believed that the launching of the BS-3a will provide the appropriate occasion for the inauguration of services.

Compatibility

A number of key problems remain to be resolved before the final decision is made, however. The problem of compatibility with existing television receivers is especially difficult. Methods of chrominance multiplexing, luminance bandwidths and line rates all differ from those currently in use in Japan, the US and Europe. This means that a satisfactory scheme for phasing in the new system without immediately making existing sets obsolete must be devised.

Since HDTV broadcasts cannot be launched until there are some receivers "out there", the solution would seem to

lie in the direction taken with colour TV: making HDTV broadcasts compatible with existing sets, even though the reception cannot benefit from the full effects of the new system. It took 20 years after colour television was introduced to phase out monochrome sets in Japan. While the transition to HDTV is likely to be faster, this will largely depend on the arrangements for gradual transition.

CBS, which has made a major commitment to HDTV in the US, has devised a scheme whereby a 1050-line transmission is divided between two channels. Existing sets, according to this scheme, could receive conventional 525-line broadcasts on a single channel.

Digital processing

But consensus on this issue is proving elusive. Some of the industry's wise men, especially in the US, see no real need to shift to high definition broadcasts soon. Pseudo-HDTV effects are obtainable with full digitisation of the video circuits. Digital receiving systems (digital TV transmission systems have yet to be developed) have the advantage of higher fidelity in signal processing which can improve picture quality almost as much as HDTV, even with the existing broadcast signal.

By using large enough RAM (random access memory) IC devices, it is possible to double or triple the number of scanning lines simply by storing them for display in the desired sequence. Digital receivers can also be designed for high-quality TV stereo, special effects (such as freeze-frame, split-screen and zoom), and

High definition TV

teletext storage and retrieval. Flicker and ghost elimination circuitry can also be included.


Since neither bandwidth, obsolescence, nor problems of standards arise with digital television, it is clear, as a Matsushita executive has affirmed that the future of TV has to be digital.

There are other compelling reasons why this must be so. The number of components required in a digitised receiver is substantially lower, decreasing the adjustment steps in production while increasing reliability. Sony engineers reckon that through the use of digital circuitry they can reduce the number of components from the 400 required at present to less than 100.

Unlike HDTV, which has been developed mainly by a broadcaster rather than a manufacturer, and which uses entirely new technologies of Japanese origin, digital TV has found its champion in ITT Europe. ITT's German subsidiary, Intermetall, has been selling its seven-chip Digitvision circuits for as low as US\$25 and, in time, the price will decline.

For leading Japanese makers, however, digital and high definition TV are not mutually exclusive. Sony, Sanyo, Sharp, Matsushita, and Toshiba have been among the early developers of digital signal processing using ITT chip assemblies. In August 1983, both Sony and Matsushita announced breakthroughs in digital TV circuitry, with Sony claiming more than 60 patents pending on a design that incorporated "non-interlace scanning" and which doubles the number of lines on the TV screen. To produce the 1150-line picture, each line of the received broadcast is stored in a digital memory before being clocked out at double speed to the TV screen.

Sony's new system also features

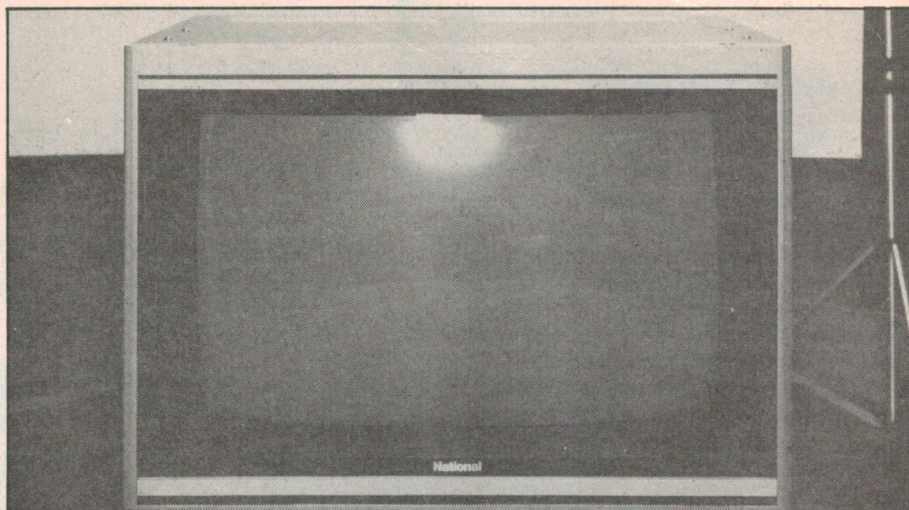

This is the National HDTV receiver.

complete separation of the luminance and colour signals which reduces the incidence of flickering and colour spillover. A dynamic comb filter, developed by ITT and incorporated into one of the Digivision ICs assembly, enhances picture resolution, providing reproduction of images free of interference.

At the same time, based on NHK's 1125-line HDTV technology, Sony has developed a high-definition video system with video recording, timebase correction and other capabilities. Elements of the system, prototypes of which were demonstrated as early as 1981, include:

- A high definition 3-tube TV camera, which incorporates the NHK 1-inch Saticon high-resolution pick-up tube;
- A 1-inch wideband VTR, with a new high-density recording format;
- A wideband digital timebase corrector, featuring a newly developed wideband AD converter;
- 20-inch and 30-inch high-definition

Trinitron monitors, with a fine-pitch picture tube.


- A 100-inch high-definition TV projector, with a wideband picture tube.

Cost problems

Even so, dramatic progress has been elusive, despite the best efforts of NHK and set makers. Last May, both Sony and Matsushita announced that their first high definition television sets still will not be ready for market until 1986, and then at the handsome sum of around 500,000 yen (\$2500) per set — not including the parabolic antennas that might be needed to receive HDTV transmission by direct satellite broadcast. At present prices, the dish antenna plus tuner is available for 200,000-300,000 yen (\$1000-1500), all of which pushes the price for a total installation into the million yen bracket.

At these price levels, industry analysts estimate, it is going to take seven to 10 years for the market to reach the takeoff point. There are about 100,000 adventurous buyers in Japan who can be expected to snap up almost any new product, but for anything like a boomlet to develop, prices of the sets themselves must be brought down to the 200,000 yen level and antenna prices lowered proportionately.

HDTV sets are expensive at the moment because the TV decoder needed for bandwidth compression will need memory chips totalling 10 megabits. However, as 256K RAM devices decline in price with rising production, this memory cost will decline sharply. Makers have also indicated that they are taking other measures to trim costs. At the same time, antenna prices can be expected to decline with new technologies and rising scale economies with increased output.

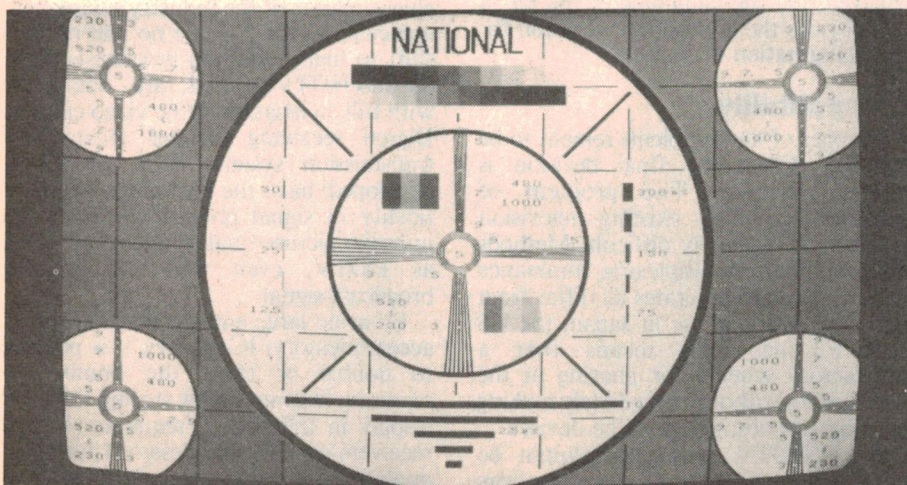

High definition TV test pattern from National.

ICL7106	19.50	74H106	2.50	74LS160	1.00	MM58174	19.50	SC1520	6.90	MR4555	37.00	74148	2.00	FD1771	19.00	79L05	1.20
ICL7116	19.50	74H108	2.50	74LS161	8.00	MM5303	7.50	C103YY	9.00	MR474	7.70	74150	1.20	FD1791	88.76	79L12	1.20
ICL7117	21.50	74H113	1.10	74LS162	1.10	MM5309	14.50	C103OB	9.00	MR6603	19.50	74151	1.20	FD1793	88.77	79L24	1.20
ICL7161	6.90	74H124	9.00	74LS163	1.10	MM5369	9.50	C106B	9.00	MR6641	49.00	74154	1.75	FD1795	39.00	79L30	1.20
ICL7162	6.90	74H183	7.90	74LS164	9.00	MM5370	9.50	C106B	9.00	MR6641	49.00	74155	1.75	FD1797	39.00	79L30	1.20
ICL7660	5.90			74LS165	1.00	MM5371	9.50	C106B	9.00	MR6641	49.00	74156	1.75	FD1799	39.00	79L30	1.20
ICL7661	5.90	74C		74LS166	2.55	MM5372	9.50	C106B	9.00	MR6641	49.00	74157	1.75	FD1799	39.00	79L30	1.20
ICL7662	4.90	74C		74LS167	2.55	MM5373	9.50	C106B	9.00	MR6641	49.00	74158	1.75	FD1799	39.00	79L30	1.20
ICM7111	12.50	74C02	6.00	74LS168	2.45	MM5374	9.50	C106B	9.00	MR6641	49.00	74159	1.75	FD1799	39.00	79L30	1.20
ICM7216A	44.50	74C04	8.00	74LS174	9.00	MM5375	9.50	C106B	9.00	MR6641	49.00	74160	1.75	FD1799	39.00	79L30	1.20
ICM7216B	44.50	74C08	8.00	74LS175	8.00	MM5376	9.50	C106B	9.00	MR6641	49.00	74161	1.75	FD1799	39.00	79L30	1.20
ICM7217A	48.50	74C14	1.40	74LS181	4.00	MM5377	9.50	C106B	9.00	MR6641	49.00	74162	1.75	FD1799	39.00	79L30	1.20
ICM7217B	48.50	74C20	8.00	74LS191	1.20	MM5378	9.50	C106B	9.00	MR6641	49.00	74163	1.75	FD1799	39.00	79L30	1.20
ICM7218A	18.50	74C30	8.00	74LS192	1.20	MM5379	9.50	C106B	9.00	MR6641	49.00	74164	1.75	FD1799	39.00	79L30	1.20
ICM7218B	18.50	74C42	1.90	74LS193	1.20	MM5380	9.50	C106B	9.00	MR6641	49.00	74165	1.75	FD1799	39.00	79L30	1.20
ICM7224A	21.50	74C48	2.50	74LS195	9.00	MM5381	9.50	C106B	9.00	MR6641	49.00	74166	1.75	FD1799	39.00	79L30	1.20
ICM7226A	48.50	74C73	4.00	74LS196	9.00	MM5382	9.50	C106B	9.00	MR6641	49.00	74167	1.75	FD1799	39.00	79L30	1.20
ICM7227A	19.95	74C83	2.30	74LS240	1.90	MM5383	9.50	C106B	9.00	MR6641	49.00	74168	1.75	FD1799	39.00	79L30	1.20
ICM7227B	19.95	74C85	2.30	74LS241	1.90	MM5384	9.50	C106B	9.00	MR6641	49.00	74169	1.75	FD1799	39.00	79L30	1.20
ICM7240	15.50	74C89	8.90	74LS243	9.00	MM5385	9.50	C106B	9.00	MR6641	49.00	74170	1.75	FD1799	39.00	79L30	1.20
ICM7242	7.50	74C90	1.90	74LS244	1.50	MM5386	9.50	C106B	9.00	MR6641	49.00	74171	1.75	FD1799	39.00	79L30	1.20
ICM7250	7.90	74C93	1.90	74LS245	2.60	MM5387	9.50	C106B	9.00	MR6641	49.00	74172	1.75	FD1799	39.00	79L30	1.20
ICM7260	7.90	74C107	1.20	74LS246	1.30	MM5388	9.50	C106B	9.00	MR6641	49.00	74173	1.75	FD1799	39.00	79L30	1.20
ICM7555	2.75	74C150	6.50	74LS249	1.60	MM5389	9.50	C106B	9.00	MR6641	49.00	74174	1.75	FD1799	39.00	79L30	1.20
ICM7556	2.95	74C151	4.20	74LS251	1.50	MM5390	9.50	C106B	9.00	MR6641	49.00	74175	1.75	FD1799	39.00	79L30	1.20
74S	4.50	74C160	1.90	74LS252	1.50	MM5391	9.50	C106B	9.00	MR6641	49.00	74176	1.75	FD1799	39.00	79L30	1.20
74S02	1.00	74C161	1.90	74LS253	1.20	MM5392	9.50	C106B	9.00	MR6641	49.00	74177	1.75	FD1799	39.00	79L30	1.20
74S03	1.00	74C162	1.90	74LS254	1.20	MM5393	9.50	C106B	9.00	MR6641	49.00	74178	1.75	FD1799	39.00	79L30	1.20
74S04	1.00	74C163	1.90	74LS255	1.20	MM5394	9.50	C106B	9.00	MR6641	49.00	74179	1.75	FD1799	39.00	79L30	1.20
74S05	1.50	74C164	1.90	74LS256	1.20	MM5395	9.50	C106B	9.00	MR6641	49.00	74180	1.75	FD1799	39.00	79L30	1.20
74S08	1.00	74C165	1.90	74LS257	1.95	MM5396	9.50	C106B	9.00	MR6641	49.00	74181	1.75	FD1799	39.00	79L30	1.20
74S09	1.50	74C166	1.90	74LS258	1.95	MM5397	9.50	C106B	9.00	MR6641	49.00	74182	1.75	FD1799	39.00	79L30	1.20
74S10	1.00	74C167	1.90	74LS259	1.95	MM5398	9.50	C106B	9.00	MR6641	49.00	74183	1.75	FD1799	39.00	79L30	1.20
74S11	1.60	74C168	1.90	74LS260	1.95	MM5399	9.50	C106B	9.00	MR6641	49.00	74184	1.75	FD1799	39.00	79L30	1.20
74S12	1.20	74C169	1.90	74LS261	1.95	MM5400	9.50	C106B	9.00	MR6641	49.00	74185	1.75	FD1799	39.00	79L30	1.20
74S13	1.00	74C170	1.90	74LS262	1.95	MM5401	9.50	C106B	9.00	MR6641	49.00	74186	1.75	FD1799	39.00	79L30	1.20
74S14	1.00	74C171	1.90	74LS263	1.95	MM5402	9.50	C106B	9.00	MR6641	49.00	74187	1.75	FD1799	39.00	79L30	1.20
74S15	1.00	74C172	1.90	74LS264	1.95	MM5403	9.50	C106B	9.00	MR6641	49.00	74188	1.75	FD1799	39.00	79L30	1.20
74S16	1.00	74C173	1.90	74LS265	1.95	MM5404	9.50	C106B	9.00	MR6641	49.00	74189	1.75	FD1799	39.00	79L30	1.20
74S17	1.00	74C174	1.90	74LS266	1.95	MM5405	9.50	C106B	9.00	MR6641	49.00	74190	1.75	FD1799	39.00	79L30	1.20
74S18	1.00	74C175	1.90	74LS267	1.95	MM5406	9.50	C106B	9.00	MR6641	49.00	74191	1.75	FD1799	39.00	79L30	1.20
74S19	1.00	74C176	1.90	74LS268	1.95	MM5407	9.50	C106B	9.00	MR6641	49.00	74192	1.75	FD1799	39.00	79L30	1.20
74S20	1.00	74C177	1.90	74LS269	1.95	MM5408	9.50	C106B	9.00	MR6641	49.00	74193	1.75	FD1799	39.00	79L30	1.20
74S21	1.00	74C178	1.90	74LS270	1.95	MM5409	9.50	C106B	9.00	MR6641	49.00	74194	1.75	FD1799	39.00	79L30	1.20
74S22	1.00	74C179	1.90	74LS271	1.95	MM5410	9.50	C106B	9.00	MR6641	49.00	74195	1.75	FD1799	39.00	79L30	1.20
74S23	1.00	74C180	1.90	74LS272	1.95	MM5411	9.50	C106B	9.00	MR6641	49.00	74196	1.75	FD1799	39.00	79L30	1.20
74S24	1.00	74C181	1.90	74LS273	1.95	MM5412	9.50	C106B	9.00	MR6641	49.00	74197	1.75	FD1799	39.00	79L30	1.20
74S25	1.00	74C182	1.90	74LS274	1.95	MM5413	9.50	C106B	9.00	MR6641	49.00	74198	1.75	FD1799	39.00	79L30	1.20
74S26	1.00	74C183	1.90	74LS275	1.95	MM5414	9.50	C106B	9.00	MR6641	49.00	74199	1.75	FD1799	39.00	79L30	1.20
74S27	1.00	74C184	1.90	74LS276	1.95	MM5415	9.50	C106B	9.00	MR6641	49.00	74200	1.75	FD1799	39.00	79L30	1.20
74S28	1.00	74C185	1.90	74LS277	1.95	MM5416	9.50	C106B	9.00	MR6641	49.00	74201	1.75	FD1799	39.00	79L30	1.20
74S29	1.00	74C186	1.90	74LS278	1.95	MM5417	9.50	C106B	9.00	MR6641	49.00	74202	1.75	FD1799	39.00	79L30	1.20
74S30	1.00	74C187	1.90	74LS279	1.95	MM5418	9.50	C106B	9.00	MR6641	49.00	74203	1.75	FD1799	39.00	79L30	1.20
74S31	1.00	74C188	1.90	74LS280	1.95	MM5419	9.50	C106B	9.00	MR6641	49.00	74204	1.75	FD1799	39.00	79L30	1.20
74S32	1.00	74C189	1.90	74LS281	1.95	MM5420	9.50	C106B	9.00	MR6641	49.00	74205	1.75	FD1799	39.00	79L30	1.20
74S33	1.00	74C190	1.90	74LS282	1.95	MM5421	9.50	C106B	9.00	MR6641	49.00	74206	1.75	FD1799	39.00	79L30	1.20
74S34	1.00	74C191	1.90	74LS283	1.95	MM5422	9.50	C106B	9.00	MR6641	49.00	74207	1.75	FD1799	39.00	79L30	1.20
74S35	1.00	74C192	1.90	74LS284	1.95	MM5423	9.50	C106B	9.00	MR6641	49.00	74208	1.75	FD1799	39.00	79L30	1.20
74S36	1.00	74C193	1.90	74LS285	1.95	MM5424	9.50	C106B	9.00	MR6641	49.00	74209	1.75	FD1799	39.00	79L30	1.20
74S37	1.00	74C194	1.90	74LS286	1.95	MM5425	9.50	C106B	9.00	MR6641	49.00	74210	1.75	FD1799	39.00	79L30	1.20
74S38	1.00	74C195	1.90	74LS287	1.95	MM5426	9.50	C106B	9.00	MR6641	49.00	74211	1.75	FD1799	39.00	79L30	1.20
74S39	1.00	74C196	1.90	74LS288	1.95	MM5427	9.50	C106B	9.00	MR6641	49.00	74212	1.75	FD1799	39.00	79L30	1.20
74S40	1.00	74C197	1.90	74LS289	1.95	MM5428	9.50	C106B	9.00	MR6641	49.00	74213	1.75	FD1799	39.00	79L30	1.20
74S41	1.00	74C198	1.90	74LS290	1.95	MM5429	9.50	C106B	9.00	MR6641	49.00	74214	1.75	FD1799	39.00	79L30	1.20
74S42	1.00	74C199	1.90	74LS291	1.95	MM5430	9.50	C106B	9.00	MR6641	49.00	74215	1.75	FD1799	39.00	79L30	1.20
74S43	1.00	74C200	1.90	74LS292	1.95	MM5431	9.50	C106B	9.00	MR6641	49.00	74216	1.75	FD1799	39.00	79L30	1.20
74S44	1.00	74C201	1.90	74LS293	1.95	MM5432	9.50	C106B	9.00	MR6641	49.00	74217	1.75	FD1799	39.00	79L30	1.20
74S45	1.00	74C202	1.90	74LS294	1.95	MM5433	9.50	C106B	9.00	MR6641	49.00	74218	1.75	FD1799	39.00	79L30	1.20
74S46	1.00	74C203	1.90	74LS295	1.95	MM5434	9.50	C106B	9.00	MR6641	49.00	74219	1.75	FD1799	39.00	79L30	1.20

High definition TV



Toshiba's digital HDTV uses the "Digivision" chip set from ITT.

Toshiba and Alcoa NEC Communications Company (an affiliate of NEC Corp) will supply home receivers and parabolic antennas to Satellite Television Corporation (STC) of the US, under agreements concluded at the end of 1983. STC is in the final stages of preparations for a major satellite broadcasting blitz. Toshiba's system consists of a parabolic antenna for receiving super-high-frequency (SHF) 12GHz signals, an outdoor converter, and a tuner connected to the TV set — all for 240,000 yen (\$1200).

New plastic antennas with built-in converters, reportedly under development by half-a-dozen makers — including appliance makers Yagi Antennae and Nitto Electric — could bring prices down to the 10,000 yen (\$50) per set level, some financial analysts estimate. At this point, both direct satellite broadcasting and HDTV will become much more interesting propositions.

While digital TV will not wait for high definition television transmissions, HDTV technology is finding its immediate applications on other fronts. Since it comes close to duplicating 35mm film when projected, HDTV systems are expected to be widely used in movie production. Fully automatic HDTV cameras have the advantage of easy operation. Tape, unlike film, is not wasted in the editing process, but can be reused more than once. And instead of shipping prints to theatres around the world, motion picture companies will be able to distribute a taped version by satellite.

With this use in mind, Sony now has an entire integrated line of HDTV motion picture production equipment which is designed specifically to obtain

economy and production efficiency in film making and distribution.

What is good enough for the film industry is good enough for the home. Since high definition videotape recorders are an integral part of the NHK system, they can be marketed independently as stand-alone video systems appealing to the same people who purchase expensive audio equipment. High definition tape can be reproduced directly from motion pictures, conserving the original quality.

Practical HDTV

For ultimate conversion of present systems to HDTV, several intermediate steps must be taken:

- Some agreement has to be reached on exact standards. Since HDTV systems are large-scale, they require large investments. And all but public corporations such as NHK would likely hesitate to make investments on this scale, in the absence of universally accepted standards.

- There is the problem of the cost of band compression. Until this problem is resolved, either HDTV will be limited at the supply side with too few channels available to carry HDTV broadcasts, or the sale of receivers will be restricted, causing hesitation among commercial and public broadcasters alike.

- Even if the chicken-and-egg syndrome is overcome, the transition from conventional to HDTV broadcasting is fraught with complexity. Some scheme, perhaps similar to the CBS formula, must be found which does not make existing TV receivers obsolete. Digital TV could provide an answer by simplifying the conversion process.

Two circumstantial factors suggest that these problems will be resolved or eventually vanish. All major Japanese

electronic equipment makers have developed a line of HDTV cameras, recorders and other video equipment. To a large extent, the future growth of these companies depends on the market for the next generation — HDTV generation — of television. Likewise, NHK is fully committed to the development of HDTV.

Given the preponderance of the Japanese manufacturers in the global television industry, this alliance between NHK and the Japanese makers may well be sufficiently powerful to reduce the apparent obstacles to insignificance.

No one in the Japanese industry these days doubts that the powerful mix of HDTV, digital TV and direct satellite broadcasting all add up to explosive and continuing growth. Among them, the three technologies provide a good 25 years of potential growth through product and production innovation.

Add to this the consequences of the merging of television and computer, television and telephone, and television and printers in the new media. A foretaste of things to come is seen in Matsushita Electric Industrial Company's new digital set that can simultaneously process signals from regular TV stations, videotext services, and home computers. And, last October, Mitsubishi Electric Corp began marketing a US\$1060 TV set with a built-in printer that turns out hard colour copy of images received on the screen. The TV is just a step away from becoming a facsimile terminal!

Flat-screen displays

Mitsubishi Electric has also joined the race for flat, full-colour liquid crystal displays with the announcement last year of the world's first large system. Boasting a picture field of 1.2 × 1.8 metres (the size of the tatami used in traditional flooring), it can display full-colour animation, patterns and characters input from a videorecorder, video camera or computer. The system, initially priced at 10-30 million yen (\$50,000-150,000) per square metre, will first be used for visual services at theatres, music halls and sports arenas, but also heralds the advent of the flat-screen wall TV.

Thus far Mitsubishi, Matsushita, Sony, Sanyo and Seiko — all working on active-matrix type liquid crystal displays — have been notably silent about commercial introduction dates for their new flat screen colour TV sets. But rapid-fire advances in technology have overcome many of the limitations of low contrast, narrow viewing angles and slow responses to electrical signals, thereby opening the door to such lucrative markets as colour television, computer displays, large-screen projectors and

ultra-high definition graphics.

Initially, such liquid crystal displays will be used in pocket colour TVs which are expected to appear on the market in the next two-to-three years. Japanese television manufacturers are mobilising resources to offer large area matrix displays up to the size of the Mitsubishi wall unit for use in homes with HDTV. Flat screen, many in the industry claim, could be the breakthrough that would solve the chicken-and-egg problem stymying the industry today. The problem of obsolescence would be considerably mitigated for Japanese householders if that big box suddenly could be replaced with a thin panel screen.

While many doubters remain, noting that large-size LCDs cost much more and perform less well than the conventional cathode ray tube, few of them are in Japan. Even the conventional caveat that flat-screen technology still has some distance to go before it will make the 30-year-old cathode ray tube (CRT) obsolete is dismissed as nonsense.

Work on thin-film transistor materials, especially polycrystalline silicon, is proceeding rapidly in Japanese laboratories. With the higher speed at which electrons move through these semiconductor materials, response to electrical signals is faster than other alternative materials, including amorphous silicon, which is a decided advantage for HDTV liquid displays.

Once this application is perfected by leaders such as Sharp Electronics Corporation, which is by far the largest producer of flat-screen displays at present, and major competitors such as Epson, Hitachi and Toshiba, the sky itself will not be the limit. The eventual market for full-size flat displays will grow at an astronomical rate.

All things considered, television is poised for explosive development that will make past booms look microscopic by comparison. HDTV, plus multi-functional digital television, personal computer-television, character-multiplex television, direct satellite broadcasting (DSB) television, systems television, interactive CATV, teletext, videotext — all add up to a mammoth tidal wave of new products which defies meaningful forecasts. Projections made by Nomura Research Institute (NRI) are that, by 1990, at least 45% of the consumer electronic products sold in world markets will not have existed before 1980.

By combining steady improvements in production efficiency with continuing changes in technology, Japanese consumer electronics firms are destined to play the predominant role — very much like the role they play in the continuing development of video cassette recorders.

INTERESTED IN ELECTRONICS? THEN WHY NOT TURN YOUR HOBBY INTO A CAREER?



Alan Mulraney, Stott's Graduate, in his workshop.

In this fast-changing electronic world people with interest and training are going to be in demand. Turn your interest into a lucrative career in any one of the following fields:

**Computers • Industrial Controls • Medicine
Radio Communications • Domestic Radio & Television**

Electronics plays an important role in these and many other fields. With a Stott's Home Study Course, training is easy, and will prepare you for a career in the manufacture, installation, commissioning, sales or servicing of electronic equipment.

You'll have experienced, professional instructors who will guide you through an integrated theory/practical program. They'll give you individual attention and advice, and prompt replies to all test assignments and queries. And best of all, you'll study at your own pace, in your own home.

Send the coupon today. It may be the smartest move of your life.

Stotts



CORRESPONDENCE COLLEGE

The name to trust in correspondence education.

Please send me free, and without obligation,
full details of the following courses:

(PLEASE PRINT)

MR. MRS. MISS _____ AGE _____

ADDRESS _____

POSTCODE _____

Stott's undertake that no sales counsellor will visit you.

Melbourne, 140 Flinders Street, 3000. Tel: 63 6212
Sydney, 383 George Street, 2000. Tel: 29 2445
Brisbane, 65 Mary Street, 4000. Tel: 221 3972
Adelaide, 226 Pulteney Street, 5000. Tel: 223 3700
W. Perth, 25 Richardson Street, 6005. Tel: 322 5481
Hobart, 150 Collins Street, 7000. Tel: 34 2399
New Zealand, Box No. 30-990, Lower Hutt. Tel: 676 592

The Stott's range of courses
in Electronics is:

Intro to Electronics
Digital Electronics for
Technicians/Servicemen
Microprocessors
Radio Receivers
Radio/TV Servicing
Colour Television

ALA/ST5303/EA495

Six-inch wafers: bigger is better!

One day silicon wafers will be the size of Frisbees, but meanwhile, six-inch (15cm) "platters" will have to make do. The new platters will dramatically increase production efficiency.

by DAVE SYLVESTER

In the early days of the semiconductor industry, chips were made on thin silicon discs an inch (2.54cm) in diameter. Perhaps resembling the holy bread of a Roman Catholic communion, they were called wafers. But as chip makers move toward making chips on silicon wafers six inches in diameter, the largest size ever used commercially, the name no longer seems to fit.

"Six-inch wafers shouldn't be called wafers at all," says G. Dan Hutcheson, vice president of San Jose market researcher VLSI Research Inc. "They're too big for that. Rather, six-inch wafers are more like platters . . . It takes two hands to hold them."

Whether called wafers or platters, these silicon discs are putting the semiconductor industry on the brink of a significant leap in productivity. So many more chips can fit on the surface of a six-inch wafer without attendant cost increases that, by next year, nearly every major chip maker in the United States plans to establish production lines capable of processing the larger wafers.

"It's a significant step," says Gene Norrett, a semiconductor industry analyst at Dataquest Inc, another San Jose market researcher. "It'll add significant capacity."

This fall, the move is in full swing. This year, the worldwide semiconductor industry, including captive and merchant manufacturers, is expected to use about two million six-inch wafers in making their chips. That represents a fourfold increase over the 500,000 six-inch wafers used in 1983, according to VLSI Research.

By 1987, chip makers will use about 28 million six-inch wafers, VLSI predicts, accounting for nearly 13% of the silicon wafers started in chip production. Some believe that to be a conservative estimate, while others forecast that large wafers will account for at least 30% of total chip production by 1987. As the US

and European chip-making industry grows from this year's \$15.2 billion to about \$22.4 billion in 1987, nearly all new plants will operate with six-inch equipment.

"I can't envision anybody putting in new capacity that isn't six-inch," says Art Stabenow, vice president for wafer fabrication at National Semiconductor Corp. in Santa Clara. The reason for the move is simple economics: It is cheaper to make chips with six-inch wafers than with any other size, because the number of chips on the wafer increases faster than the cost of production.

Part of the reason is a trick of geometry. Though the diameter of a six-inch wafer is only 50% larger than that of a standard four-inch wafer, its area is 125% greater. Especially important is a wafer's central area, from which good, properly functioning chips can be produced. That centre is called the "sweet spot". As Stabenow says, "The sweet spot always grows faster than the diameter does." Another plus is that the number of chips lost near the wafer's edge diminishes as a percentage of the total. "Six-inch wafers will allow manufacturers to make dice more

cheaply than they could on any other diameter," he says.

At the same time, production cost increases only half as fast as the wafer area, compared with a four-inch wafer, says Daniel Klesken, a semiconductor stock analyst at Montgomery Securities and San Francisco. Based on average industry figures, a four-inch wafer costs about \$180 to buy and process into chips, not including chip assembly and testing, he says. But when a manufacturer masters the production process, a six-inch wafer costs \$300 to process into chips, he says.


Exact comparisons are difficult because chip makers are reducing chip size as well. However, by squeezing chip size and using larger wafers, Intel Corp of Santa Clara was able to produce about four to five times as many 8051 microcontroller chips on one wafer.

With such tremendous improvements in production, the move to six-inch wafers will help keep the chip industry on track in driving down prices at the traditional 25% a year. In addition, it will help control the need to invest scarce capital in new plants, because each plant will be much more productive.

The move to six-inch production is not easy. Last October, at a new plant in Albuquerque, N.M., Intel should have had operating at significant volume the first six-inch production line for merchant chip makers. However, putting the line into production has been more difficult than the company expected.

Without being specific about the problems, Intel says it has installed at least a dozen new pieces of production equipment and is having trouble getting them to cooperate. "It's been a disappointment," chairman Gordon Moore says.

Generally, the technical problems stem from the wafer's extra size: It is more difficult to make the layers of chemicals and the etching of electronic circuits uniform across a larger surface. For instance, photoresist, a chemical layer, is applied by spinning the wafer with a droplet on its centre. With the larger wafer, the edge spins faster than the centre, creating unevenness. So the photoresist must be changed chemically and the speed of the spinning slowed down. Similar problems are encountered in other stages of production. In diffusion furnaces, for instance, heat

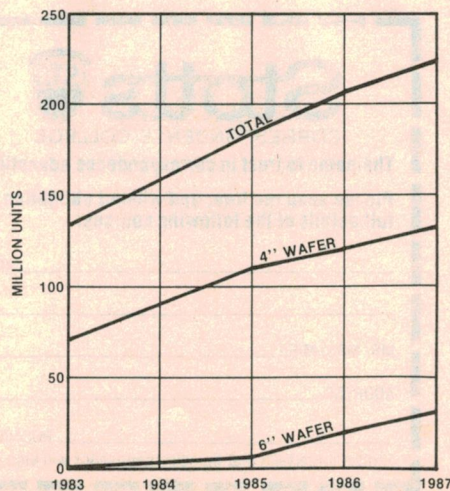

may not spread across the wafer surface evenly.

However, the company that solves these problems first will grab a competitive advantage. "It's a gamble that everyone takes," Hutcheson says.

While Intel works out the bugs, other US companies also are preparing to open six-inch wafer plants. Both National Semiconductor and Sunnyvale chip maker Advanced Micro Devices Inc planned to start six-inch lines by the end of last year. And Texas Instruments Inc of Dallas started a new line in Miho, Japan, for production of 256K dynamic random-access memories earlier this year.

Other companies are considering converting existing production lines to six-inch lines. Besides starting a six-inch line in Scotland in early 1985, Motorola Inc plans to convert its plant in Austin to six-inch production. The decision is not easy. Because the six-inch wafers are larger, every piece of equipment can run fewer wafers each hour, cutting down throughput. "Nothing is free," semiconductor group director James Fiebigler philosophises.

Japanese competition

The aggressiveness of US companies well could help them in their competitive fight with Japan. During the 1981-83 recession, Japanese chip makers expanded their production with five-inch wafer-fabrication lines while US makers waited for the recession to end. Now, as US companies install six-inch lines, the Japanese are playing catch-up. "The laggards this time around are the Japanese," says Eli Sayegh, a semiconductor stock analyst for Rowe & Pitman in San Francisco.

Not for long. While US producers work the bugs out of the production lines, Japanese companies are planning to take advantage of these lessons and should move into six-inch production within a year, says Dataquest's Norrett.

Chip industry experts do not think that the move to larger wafers will end with the six-inch wafer. "I have seen an eight-inch wafer," says David Lam, vice chairman of equipment maker Lam Research Inc of Fremont, Calif. "Looks like a dinner plate."

Even beyond, some see no reason for the industry not to proceed to 10-inch or possibly 12-inch wafers, handled entirely automatically in ultra-modern wafer-fabrication plants by the end of the century. "The silicon Frisbees," jokes Howard Bogert, semiconductor service director at Dataquest.

Reprinted by permission from *Electronic Business*. Copyright Cahners Publishing Company, Boston USA.

Eight-inch wafers the next step



IBM's East Fishkill, NY, site has announced the production of the largest silicon crystals yet produced by the company. The experimental crystals have a diameter of eight inches.

The manufacture of crystals involves a number of complex processes. First, chunks of purified silicon, derived from common sand, are reduced to a liquid in temperatures exceeding 1400° — 25 per cent as hot as the Sun! At this point, a silicon "seed", the size and shape of a pencil, is dipped into the molten silicon. The "seed" is then lifted slowly, pulling with it a trail of molten silicon which hardens to form a crystal.

The crystal column is drawn up into the cooling chamber of the crystal growing machine, and removed when it reaches a man-

ageable temperature. The diameter of the crystal is determined by the temperature of the molten silicon and the speed at which the seed is lifted. The entire process takes about 24 hours.

The finished crystal is ground into a solid cylinder, and sliced into thin wafers. The building of computer chips on the surfaces of the wafers involves hundreds of manufacturing processes, beginning with polishing the wafers to a mirror-like shine. The finished chips contain thousands of electronic circuits.

Five-inch wafers hold nearly 850 chip sites — and the experimental eight-inch wafers have the capacity to hold more than 2000 chip sites. Productivity is expected to increase as a result of this development, and the overall cost per chip is likely to be reduced.

APRIL EASTER

Our specials don't taste as good as Easter Eggs but you'll be enjoying them long after your choccles!

2nd HAND SURPLUS BARGAINS

Jaycar does not normally sell 2nd hand surplus goods but this purchase was just TOO GOOD to knock back! We have basically purchased an amount of electronic equipment from a large Australian Banking group. We are offering two items for sale, both absolutely astonishing value for money. We defy you to buy more high quality electronics for less. Both items are in outstanding condition and have not been in service for all that long. They are a distinctive orange colour. Because they are so heavy (compared to their low cost) special P&P conditions apply.

ITEM	NSW	VIC	QLD	SA	NT & WA	TAS
XX						
5910	\$2.90	\$4.60	\$6.20	\$5.80	\$8.20	\$5.80
5900	\$4.15	\$8.00	\$12.00	\$12.00	\$12.00	\$12.00

PASSBOOK PRINTER UNIT

This is the familiar unit that prints your deposit balance in your passbook savings account. The unit weighing a massive 12.5kg has a one-line matrix printer, with large gearbox reduced stepping motors for carriage head drive and passbook positioning. We estimate that ONE motor alone would be worth at least \$70. Apart from this there are 7 (YES 7) main PCB's all crammed with transistors, passives, edge connectors, gold IC sockets, Cannon subminiatures, not to mention LSI & MSI IC's, heatsinks, power transistors etc. AS WELL AS THIS a massive computer grade power supply is included, which is based on two (YES 2) monstrous double C-core transformers! The power supply will provide standard voltages of +5, +12V etc. The equipment is of such recent vintage to use insulation displacement connectors.

We emphasise that the equipment is not new and may not still perform its original function (no problem if you don't own a bank!). We do not have circuit diagrams but they would be meaningless anyway. They are however, an outstanding opportunity to get hold of hundreds of normally ridiculously expensive components at a fraction of their cost price. We are absolutely convinced that you will be delighted with this purchase.

Size: 345(W) x 310(D) x 215(H)
Cat. XX-5900

ONLY \$35.00

TELLER UNIT

This unit provides numeric display and data entry facility for bank tellers. As a spare parts bargain, this unit has several features:

- ★ A 12-digit (x7 segment) LED display. Display height 8mm.
- ★ US made LITRONIX displays.
- ★ Two Hall-Effect keypads, one 13-key pad, one 7 key pad.
- ★ Six PCB's crammed with LED's, IC's, IDC edge connectors, tantalum & other capacitors, resistors etc.
- ★ Two TO-3 voltage regulators, one LM323K & one LM320K5

This 3.5kg unit is fitted with a 50 way Cannon 'D' plug as well. Once again we are certain that you will be delighted with this purchase.

Dimensions: 210(W) x 300(D) x 150(H)
Cat. XX-5910

ONLY \$15.00




UNITS SHOWN WITH COVERS REMOVED

TELEPHONE EXTENSION LEADS

Our purchasing guy is a "bunny" and now we've got them coming out of our ears! SAVE HEAPS while we are in this dilemma!

YT-6010	5m Ext. lead	\$9.95 SAVE \$5
YT-6012	10m Ext. lead	\$12.95 SAVE \$7
YT-6013	15m wind up reel	\$12.95 SAVE \$7
YT-6014	20m wind up reel	\$14.95 SAVE \$8

★ **SAVE HEAPS** ★

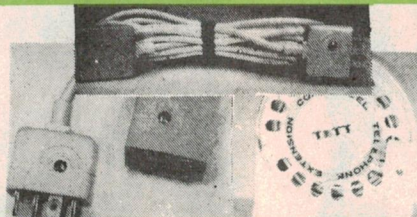

QUALITY BOXES with brass threaded inserts

Console box, available in grey, black, and blue.
Size: 215(W) x 130(D) x 47(HF) x 73(HR)mm

CATALOGUE PRICE \$12.95

Grey - Cat. HB-6211
Black - Cat. HB-6213
Blue - Cat. HB-6212



THIS MONTH \$6.95 ea

Rectangular box, available in orange, grey and blue.
Size: 150(L) x 80(W) x 50(D)mm
Slightly smaller than a UB1 Jiffy Box.

CATALOGUE PRICE \$5.45

Cat. HB-6150 - Orange
Cat. HB-6151 - Grey
Cat. HB-6152 - Blue



THIS MONTH \$3.95 ea

NUMBERED KNOB

Numbered 1 thru 0. Fits standard 1/4" shaft, with grub screw. Diameter 37mm.
Cat. HK-7549



APRIL ONLY 40¢ each
NORMALLY 85¢

MAIL ORDER HOTLINE

To save you time (and therefore money) we have installed a special HOTLINE direct to the inner workings of our mail order dept. This saves you from going through our Head Office switchboard! If you wish to place an order, enquire about an order or simply check for more information, call:


(02) 646 1300

We're In a bind over Binders!

Our magazine binders have never been so cheap! Are your ETI's and/or EA's (or any other monthly mags) in a mess? Keep them tidy with a Jaycar binder. Buy them this month and SAVE. Cat. BB-7000

USUALLY \$4.95 each

APRIL ONLY \$3.95
or 10 up \$3.65 each

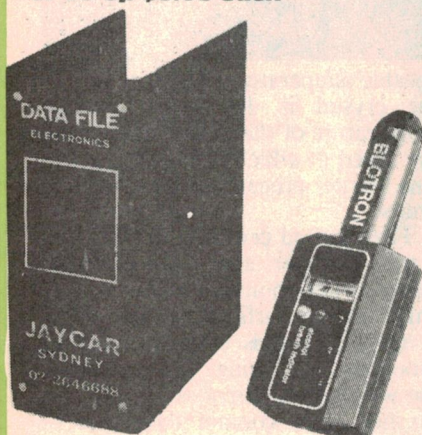

ALCOHOL CHECKER

Like the Easter Bunny, you too might be out and about over Easter. If so make sure you stay under the "limit" with our "BLOTRON" blood/alcohol checker! SAVE \$10 this month to boot!

Simply blow into the mouthpiece to see if you are over the limit. Dual analogue meter and LED go/no-go readout. Calibrated in Australia. Surprisingly accurate. Can be recalibrated if laws change. Specify 0.05 or 0.08.
Cat. YS-5100

\$78 In December - \$75 In February

IN APRIL? \$65.00
NEGATIVE INFLATION!

IC SOCKET SPECIALS!

You'd be a "Bunny" if you missed out! We have IC sockets to the rafters! We must clear some to do roof renovations.

Cat. PI-6503	18 PIN	12¢
NORMALLY 32¢		
Cat. PI-6507	28 PIN	16¢
NORMALLY 50¢		
Cat. PI-6508	40 PIN	30¢
NORMALLY 70¢		

These prices are so low that we must stipulate a minimum quantity of 100 each.

HOUSE ALARM KIT

★ **SAVE** ★

Since the release of our new house alarm kit, the old faithful ETI582 has fallen by the wayside.

This alarm kit is a very good unit, but doesn't come supplied with a fancy box. Gel battery and all that. If you are after a budget house alarm kit THAT WORKS WELL this is it, and now is the time to buy it.

Cat. KE-4032

USUAL PRICE \$59.95

THIS MONTH ONLY \$44.95

★ **SAVE \$15.00** ★



SMOKE DETECTOR

1 MONTH ONLY \$9.95

Limit of 1 per customer
Cat. LA-5090



BUNNY SPECIALS!

GIANT EASTER SHOWBAG

We are pleased to announce our 1985 SHOWBAG. This year it will not contain a Phantom comic and lolly. (We're worried about your physical and mental health!) It WILL contain over 1kg of assorted electronic goodies - junk if you like, but all brand new components etc. Like last year we are NOT SAYING exactly what goes into each bag (because each bag is unique). And, like last year we expect to run out SO BE EARLY. Unfortunately because of the massive weight P&P is \$2.50. We are pleased to advise though that the price of the bag has not changed from last year!

GIANT EASTER SHOWBAG **ONLY \$5.50!!**



WERE \$14.95

Has it hit your fan yet?

Failure we mean. Well, buy another - or buy two! Computer grade quality. German made but 110 volt. Standard 3" (75mm) square unit. Use 2 in series for 240V.

Cat. XX-2508 **NOW \$7.50**

NEW LOWER PRICE ON QUARTZ CRYSTAL CLOCK MOVEMENT

Very compact and reliable • Self starting one-second stepping motor has strong torque • Powered by 1.5V AA battery that lasts one year • Supplied with 1 set of hands • ± 15 second/month accuracy • 56mm square, 15mm deep • Complete with data sheet and instructions.

SAVE \$5 ON 1984 PRICE

ONLY \$9.95



Sweep second hand 115mm long

ROTARY DIALLERS

As used in "normal" telephones. Hundreds of uses.

Cat. XT-6900

OTHERS SELL FOR \$4.95 JAYCAR NORMAL PRICE \$2.95 JAYCAR SUPER SPECIAL PRICE

ONLY \$1.00 each



GLOBES - 45 VOLT

A pack of 500 globes, push-in bayonet type with one contact each side. As used in Sylvester switchboards. These would be great for anybody building an electronic scoreboard or for massive wiring of a train set or anything.

Cat. SL-2660


PACK OF 500 ONLY \$19.95

1.5uF GREENCAP?

Yes, we've got them, and boy has the price been slashed! **NORMALLY \$1.45 each**

APRIL ONLY 20¢ each

Cat. RG-5172



STRIKE GOLD THIS EASTER!


The price of gold is down - and so is the price of finding it! We've slashed the price, but for APRIL ONLY.

REF. EA December 1984

If you've been contemplating purchasing a metal detector, now is the time, they will never be cheaper. This very sensitive unit works as well as units costing hundreds more! Features special English-made quality case and pre-wound and sealed head assembly. Looks just like the \$700 plus units! (All parts supplied).

Cat. KA-1554

UNBELIEVABLE - SAVE \$90 - ONLY \$149

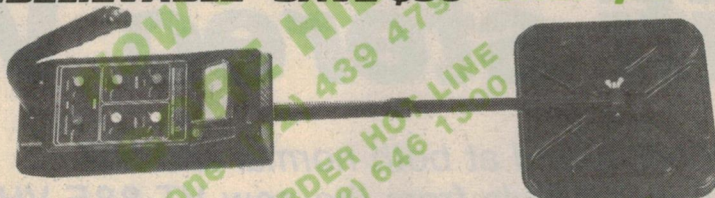


COMPUROBOT

Program this exciting robot to perform a sequence of complex maneuvers. Has multi-speed gearbox, flashing lights & makes robot noises. An ideal learning tool for the young scientist. Battery powered.

Cat. XR-1024

SAVE \$10 APRIL ONLY NOW

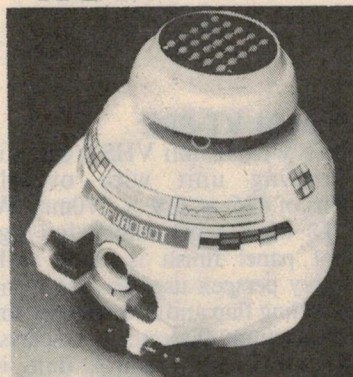

MAD HATTER'S SPECIAL


We are absolutely GAA-GAA over this one!

PLUGPACK - Ferguson 240 volt to 12V DC 400mA plugpack. This quality Australian made plug pack used to sell for \$16.95. We had them on special for one month last year at \$4.95 and we sold a stack of them!

This is your second chance to SAVE and SAVE even more. **LIMIT OF 2 PER CUSTOMER**

Cat. MP-3013

ONLY \$3.95 "YES WE ARE MAD"



Silly Prices on Nylon Moulded Battery Holders...

We've got more of these than hot cross buns at the Easter Show!

4AA Cat. PH-9200

NORMALLY 55¢

15¢ ea

10 or more 12¢ ea

6AA Cat. PH-9206

NORMALLY 80¢

20¢ ea

10 or more 16¢ ea



SILLY PRICES



PACKS

ELECTROLYTIC PACK - 55 quality RB type supplied.

Values range from 1uF to 470uF. Voltages from 16 to 63.

Cat. RE-6250

\$6.50

RESISTOR PACK - Over 300 1/4 watt 5% 1st grade resistors supplied. Only popular values - from 10 ohms to 10M.

Cat. RR-1680

\$5.90

GREENCAP PACK - 60 top quality prime spec greencaps. From 0.001uF to 0.22uF, all 100V.

Cat. RG-5199

\$6.75

CERAMIC PACK - 60 top quality prime spec 50VW ceramics. Values from 10pF to 0.1uF.

Cat. RC-5399

\$3.95

METAL FILM RESISTORS - 150 quality 1% 1/4W 50ppm resistors. All common values supplied.


Cat. RR-0650

\$5.50

RESISTOR NETWORKS - 50 assorted values, top quality. 10 lead resistor networks. This pack would normally be worth \$40. Values range from 680 ohms to 1M.

Cat. RR-3380

\$10.00



XIDEX FLOPPIES

SINGLE SIDED DOUBLE DENSITY 5 1/4"

Cat. XC-4775

\$5.50 each - Box of 10 \$54.50

DOUBLE SIDED DOUBLE DENSITY 5 1/4"

Cat. XC-4770

\$5.95 each - Box of 10 \$59.50

APRIL ONLY - LESS 25%

OPENING SOON!

Call in to our brand new store at 188 Pacific Highway GORE HILL. You can't miss it, just a few doors up from Dick Smith. We hope that all JAYCAR patrons on the North Shore will look us up. You're more than welcome!

Jaycar

ELECTRONICS

Incorporating ELECTRONIC AGENCIES
NUMBER 1 FOR KITS

N.S.W. SHOWROOMS

SYDNEY: 117 York Street. Tel. (02) 267 1614

CARLINGFORD: Cnr. Carlingford & Pennant Hills Road. Tel. (02) 872 4444

CONCORD: 115/117 Parramatta Road. Tel. (02) 745 3077

HURSTVILLE: 121 Forest Road. Tel. (02) 570 7000

GORE HILL: 188/192 Pacific Highway (Cnr. Bellevue Avenue). Tel. (02) 439 4799

QUEENSLAND BURANDA: 144 Logan Road. Tel. (07) 393 0777

MAIL ORDERS: P.O. Box 480, AUBURN 2144. Tel. (02) 643 2000

HEAD OFFICE: 7/9 Rawson Street, AUBURN 2144.

Tel. (02) 643 2000 Telex: 72293

SHOP HOURS

Carlingford, Hurstville & Gore Hill
Mon-Fri: 9am - 5:30pm, Thurs 8:30pm, Sat 12pm
Sydney
Mon-Fri: 8:30am - 5:30pm, Thurs 8:30pm, Sat 4pm
Concord
Mon-Fri: 9am - 5:30pm, Sat 4pm

POST & PACKING

\$5 - \$9.99 \$1.50
\$10 - \$24.99 \$3.20
\$25 - \$49.99 \$4.50
\$50 - \$99.99 \$6.50
\$100 - \$198 \$8.00
Over \$199 \$10.00

COMET ROAD FREIGHT ANYWHERE IN AUSTRALIA ONLY \$12



MAIL ORDER VIA YOUR PHONE

Hitachi VT-88E

hifi stereo VCR

Stereo hifi sound at both normal and half speeds is available from the new VT-88E VHS cassette recorder from Hitachi, with similar performance from both speeds. It also includes comprehensive programming features and infrared remote control.

We have already expounded the virtues of hifi VCRs, in last January's hifi review. As an audio recorder, a hifi VCR offers much better sound quality than a conventional cassette deck. The new machines offer a wider dynamic range, lower noise and distortion, improved bandwidth characteristics, and much less wow and flutter. Plus stereo, of course.

In order to obtain this hifi quality, the sound track width needs to be wider and the relative speed between head and tape increased. This is in comparison to the linear sound track of conventional VCRs. As a consequence, the same helical scanning system is used for both the video and audio signals.

Two extra heads are fitted to the video drum and these impose the twin frequency-modulated sound carriers onto the tape just ahead of the video signal. To avoid crosstalk between the audio and video heads, they are aligned at different azimuth angles. The audio heads are aligned ± 30 degrees while the video heads remain at their original ± 6 degrees.

Two other factors also reduce the crosstalk between the audio and video signals:

In the case of VHS, the left and right channel frequency modulated signals have separate carriers centred on 1.4MHz and 1.8MHz respectively.

When recording, the FM audio signals are recorded deeply into the magnetic layer of the tape by using high currents and wide gap tape heads. The video heads on the other hand use low currents and narrow gaps, to produce a shallow recording.

The Hitachi VT-88E

Hitachi's VT-88E hifi VHS VCR is a front loading unit with overall dimensions of $435 \times 119 \times 370$ mm (W \times H \times D). Mass is approximately 11kg. The front panel finish is black with smoked grey perspex used for the front cassette loading flap and as a window for the three vacuum fluorescent displays. An infrared remote control unit is supplied and duplicates most of the features on the front panel of the VCR itself.

Central to the front panel are the controls for the tape transport mechanism: Stop, Play, Pause, Frame Advance, Fast Forward, Reverse and finally the Record switch. These provide the standard control features found on most VCRs such as frame-by-frame viewing, fast frame scanning in both forward and reverse directions and fast forward and reverse.

To the left of the tape transport controls is the counter and 'tape remaining' display. This shows the tape counter, and the remaining recording and playback times. It also has symbols to show VTR (video tape player), ATR (audio tape player), cassette, camera, counter and the remaining recording and this display section are the Reset and Memory pushbutton switches and a hifi indicator. The Memory function stops the tape in rewind at the reset or 0000 indication of the tape counter.

At the top right of the VT-88E is the clock and channel indicator display. This shows the present time, the timer programming and the channel program number.

Below this is the Peak Level Indicator

showing the audio levels of each channel, for levels extending from -20 dB up to $+8$ dB. This display can be switched off with the Dimmer switch which also serves the purpose of dimming the clock display. At the right of this display are situated the recording level slider controls, to adjust the level of the audio signals when recording.

The remaining controls on this side of the VCR are the Channel select buttons, which increment or decrement the channel numbers for selections from 0 to 63. Two indicators just above the level controls show whether the received television signal is either in a stereo or bilingual format.

At the far left of the player are the Operate and Timer switches and the stereo phones socket, which has an output level adjustment. The Operate switch initiates power to the VCR, but when switched off keeps power for the clock and timer. The Timer switch is used to set the VCR to record a program at the time set by the program clock.


Hidden controls

A flip-down cover that stretches virtually along the entire lower portion of the front panel encloses a multitude of control features. This is used to hide controls that are not often used in the normal operation of the VCR.

At the right hand side, occupying the entire portion below the record level indicators and level sliders, are located the Time Setting controls. These provide for time and programming setting of the 12 hours clock with AM and PM indicators and the five program 14-day timer.

An Instant Recording Timer (IRT) allows immediate recording of a program. The player is then switched off at the preselected time programmed on the program timer.

To the left under the flip-down cover are the picture and audio controls including the Dolby switch, the combined hifi/normal and automatic level switch (ALC), audio channel selection, the tracking and picture control and finally the audio/video tape

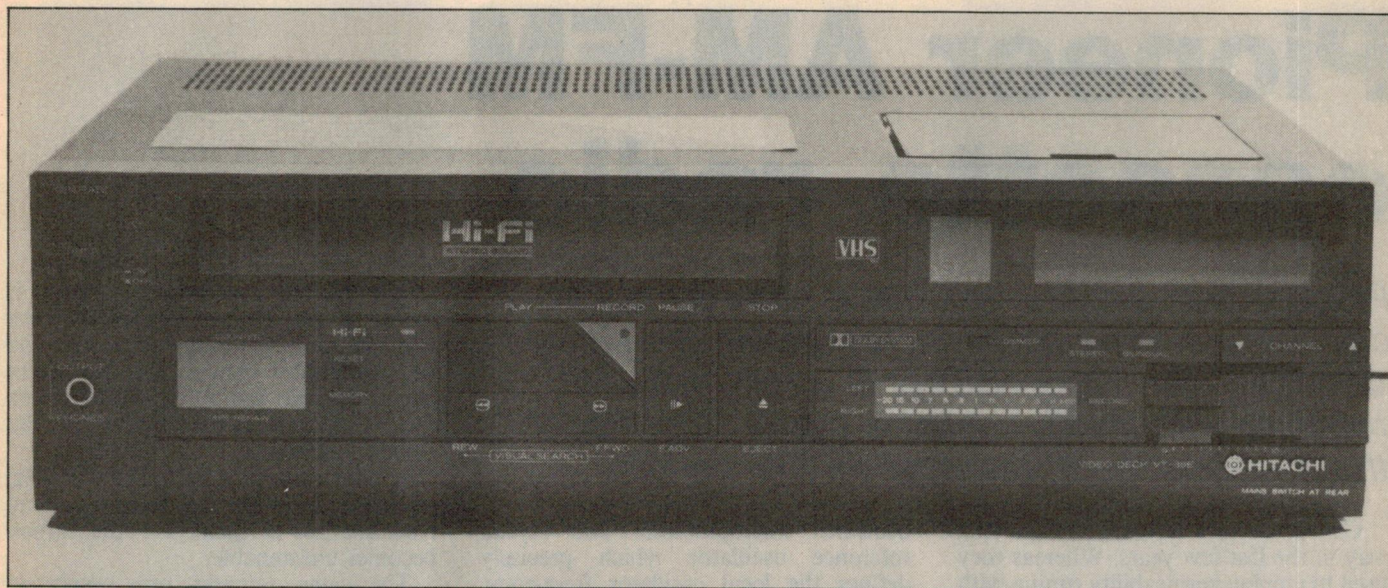

The Hitachi VT-88E hifi VCR: an impressive and versatile performer.

recorder/index select switch.

The hifi/normal/ALC select switch performs two functions. Firstly during playback, with the switch in, the playback is only from the linear track for normal sound. When the switch is out, hifi sound is played back. Secondly, while recording, the switch enables an automatic level control when pressed in. Manual level control is available, when the switch is out.

The ATR/VTR/Index select switch is again a multi-function switch. As an audio hifi deck operating at half speed, the switch is set to the ATR position. The VTR position records at normal speed and also records the video information. Note that if hifi sound only is wanted (in the VTR position) it is still necessary to record a video signal so that the speed of the tape is locked at a constant speed.

The Index position records a location marker so that on playback the tape will be stopped automatically at the beginning of the recording, when the switch is in the VTR position. In the case of the ATR position, an index is recorded whenever the pause button is pressed. This allows programming so that the tape can stop at various locations in the recording.

The audio channel select switch operates for playback and determines whether channel 1, channel 2 or both channels are fed to the output terminals. Note that channel 1 is the mono track output from a normal recording and Channel 2 is used for the second language in a bilingual recording or transmission.

Among the remaining controls is

Tracking, which adjusts the position of the capstan relative to the heads for best playback response. This is useful if the recording was made on a different VCR which may have a slightly different setting. The Picture control provides a soft to sharp range for adjusting the level of detail of the video.

At the top of the VCR are the video setting controls. The RF output can be selected to provide either channel 3 or 4, using the RF channel switch. A TV test pattern is available so that the TV set can be fine-tuned to the frequency output from the VCR. This pattern comprises a black screen with two vertical white bars.

A 39-channel memory preset can be programmed to store any of the channels of the VHF and UHF bands. It has automatic frequency setting and control, however this can be negated by pressing the fine tuning button during the setting up procedures.

At the rear of the VT-88E are several outlets and control switches. There are Belling Lee antenna and RF output sockets and RCA type sockets for audio out, audio in, and video out. A power switch for the VCR switches the main power off. A vertical sync adjustment is provided for correction of "rolling" should this occur. Also an auto/colour switch forces colour when in the colour position. This is useful if poor signal reception provides only a black and white reception when in the auto selection.

Test results

The VT-88E video performance is equivalent to standard VHS machines

and consequently, our tests concern mainly the audio quality. One feature that interested us was what effect the half speed feature, which effectively doubles playing times, actually has on audio performance. This half speed feature is only available when recording audio signals alone.

Total harmonic distortion was measured at half speed with and without the automatic level control (ALC). As expected, the distortion was higher with the ALC in operation. For a signal recorded at 0dB level we measured 1.3% at 100Hz, 0.55% at 1kHz and 1.9% at 6.3kHz without ALC. With ALC the results were 1.8%, 1.8% and 2% respectively.

At the +5dB level, distortion without ALC was slightly lower at 1.2% at 100Hz, 0.45% at 1kHz and 1.6% at 6.3kHz.

At normal speed, and with a TV signal being received, distortion at 0dB measured 1.2% at 100Hz, 0.55% at 1kHz and 1.8% at 6.3kHz, all without ALC. With ALC the results were 1.3%, 1.7% and 2.9% respectively. These readings represent mainly second harmonic distortion so the sound quality is better than the figures suggest.

At the +5dB level, distortion without ALC was 1% at 100Hz, 0.5% at 1kHz and 1.6% at 6.3kHz.

As the figures show, the distortion results are not significantly different between full and half speed. But what happens to the frequency response at full and half speed?

At full speed and 0dB the response

Continued on page 116

Pioneer AM-FM cassette radio

Pioneer was the first to have a stereo AM/FM car radio on the market incorporating the Motorola decoder. The KE-A433AM is a full-featured receiver with inbuilt cassette player. It is presently the cheapest such receiver on the market.

Car radios have certainly come a long way in the last few years. Whereas they used to employ permeability tuning with manual or pushbutton operation, the better quality receivers now use all electronic tuning which is usually referred to as frequency synthesis.

The system invariably employs a

dedicated microprocessor and crystal reference oscillator which precisely defines the local oscillator frequency. The microprocessor defines the top and bottom of the AM and FM bands and the station spacing (9kHz for AM and 100kHz for FM) and thereby determines that the receiver can never be mistuned.

Frequency synthesised tuning is highly desirable, for several reasons. For FM reception, the lowest distortion and best separation between left and right audio channels are only obtained when the receiver is tuned exactly to the station's carrier.

A deviation of only 0.25% (25kHz) amounts to quite bad mistuning and resultant loss of quality — the station becomes unlistenable.

The same remarks now apply to reception of AM stereo transmissions. If the receiver is not exactly tuned to the carrier the reception, at best, will be poor. At worst, the Motorola decoder will be unable to react to the presence of



The Pioneer KE-A433AM is a full-featured cassette/radio unit with feather-touch presets for 12 FM and 6 AM stations.

SOME OFFERS YOU CAN REFUSE

INTRODUCTORY SPECIALS ON ACE QUALITY, POST FREE, PCB. (UNAVAILABLE FROM RETAIL OUTLETS — BUY DIRECT FROM MANUFACTURER)

	ACE	OTHERS		ACE	OTHERS		ACE	OTHERS
84ba5. EA DELUXE BURG ALARM	7.95	10 & UP	84al8. EA VCR THEFT ALARM.	3.95	5.00 & UP	84ti9. BREAKERLESS IGN	2.95	BETTER BE QUICK!
85ha1. EA HOUSE BURG ALARM	17.95	19.95 & UP	477. ETI 300W MOSFET AMP	4.50	5.90 & UP	84au6. EA CRUISE CONTROL (SET/2)	14.00	16 & UP
			82pc8. EA FLURO STARTER 5PCBs	3.95	5.00 & UP			
			ETI.1421	\$3.95.	ETI.666	\$3.95.	ETI.1410 (SET/5)	\$25.95.
							EA84ms10 AM STEREO DECODER	\$3.50.

100s PLUS 100s MORE OF ACE QUALITY PCBs

TAKE INTO ACCOUNT THAT ALL PCBs ARE POST FREE — A SAVING OF \$1.50!! — WHEN YOU PURCHASE FROM ACETRONICS, THE PCB SPECIALIST — NOW IS THAT TREMENDOUS VALUE OR NOT?

WHILST CURRENT STOCK LAST. (NO WE WILL NOT SUPPLY A HANKY IF YOU MISS OUT!!!)

★ SCOOP PURCHASE ★ EA TRANSISTOR TESTER KIT ★ A 'MUST HAVE' FOR REPAIRS — COMPLETE, INSTR, FRONT PANEL, ETC, BUT NO BOX ONLY \$12.00 P&P \$1.00

★ ACE BRIGHT LIGHT WARNING FLASHER FOR CARS etc ★

DELUXE — 2 LARGE STICKERS, PROFESSIONAL DASH MOUNT LAMP (NOT AN EXPENSIVE EL CHEAPO BEZEL),

ASSEMBLED, INST, EASY TO INSTALL, AUTOMATIC ON & OFF

FIND OUT HOW YOU CAN BECOME AN ACETRONICS DISCOUNTER — AND SAVE YOURSELF UP TO 14% MORE — SEND 40c SAE AND \$1.00 FOR CATALOGUE AND DISCOUNTER DETAILS

★ N.B. ★ NO NONSENSE MANUFACTURERS 9-9 PROTOTYPE SERVICE ★
IN BY 9AM, PICK UP 9AM NEXT DAY. (S/S. 1-1 ARTWORK)
9-0-9 SERVICE FOR REDUCTIONS & D/S

BISHOPS GRAPHICS

INSULATING TAPE 19mm x 18mm GREY ONLY 40c/ROLL
TRANSFORMERS 16V CT 150mA, CORD & PLUG, READY TO GO

RISTON & PLAIN LAMINATE

ATTENTION SYS 80, TRS 80 OWNERS ... D/DESITY
EXPANSION FOR YOUR COMPUTER
INSTALLED WITH 3 MONTHS WARRANTY

ETCHANTS ETC

\$130, INSTR, P&P \$7.50
\$150

ACETRONICS PCBs

112 ROBERTSON RD BASS HILL 2197

MAIL ORDERS — PO BOX 76 YAGOONA 2199
(02) 645 1241 OPEN SEVEN DAYS

the pilot tone and the reception will stay resolutely in mono, and be distorted to boot.

Pioneer have had the advantage in the Australian marketplace by being the first to have a frequency-synthesised car radio with the inbuilt Motorola AM stereo decoder. Their model KE-A433AM has been a popular seller since it was released onto the market late last year.

The styling and presentation of the Pioneer set is similar to many competing models. It is built to the compact DIN format and so can be installed into just about any car dash or console.

A liquid crystal display provides readout of the station frequency, indicates whether a stereo transmission is being received, the tuning mode and the station preset number. For car use the LCD is better than the alternative LED or vacuum fluorescent displays which can be rendered virtually unreadable in bright sunlight.

For night-time use the liquid crystal display is not quite so advantaged but the readout is still legible due to the pleasant green backlighting. At the same time, all the controls are backlit at night for ease of use.

Three modes of tuning are possible: Memory, Seek and Manual. In the Memory mode the driver merely pushes the band button and one of the three rocker buttons to select one of the 12 preset FM stations or 6 AM stations. These station settings are stored in memory (via a simple tuning procedure) while ever the receiver is connected to the car battery.

To enable the Seek mode, the righthand knob is pushed to display the

"Seek" legend on the display. Then it is merely a matter of either twisting the same knob to the left or right to send the unit down or up the band. Even here, there are two levels of operation which are dependent on station signal strength. Pushing the "Loc.S" button means that only the strong stations will be tuned in the Seek mode.

The manual tuning process is similar — just twist the righthand knob to shift the tuner up or down by 9kHz in the AM mode and by 25kHz in the FM mode.

In the AM mode you can select wide or narrow band operation. The former gives a wider audio bandwidth but in many reception areas the narrow band is the more listenable.

The tape player is a fairly standard unit which incorporates auto-replay. This automatically starts the tape playing when rewind is complete. The 70µs button is pressed when playing a metal or chromium dioxide tape. Unfortunately, though, Dolby B noise reduction is not a feature which is a pity since most pre-recorded cassettes are recorded with Dolby these days.

Inside, the Pioneer KE-A433AM is just as crowded as car radios have always been. Except that now it is crowded with the tape transport and several printed circuit boards which are themselves crowded with teensy-weensy surface-mounting components. The Motorola 13020P is there too. We checked.

Fitting the Pioneer set is just as tedious as with other car radios, too. Unless, you are an experienced installer, don't make the mistake of thinking that you can install one of these units in an

hour on a Saturday afternoon while listening to the cricket. It is never that easy.


The Pioneer set has three positive supply leads, one for the control illumination, one for the main circuitry and the third for the microprocessor memory. As well, there is a bunch of leads for four sets of loudspeakers (the lefthand concentric knob incorporates a front/rear fader) plus the usual in-line coax socket for the antenna connection. Apart from that, all the lead terminations are via automotive bullet connectors.

Time did not permit us to carry out full objective tests. However, we can report that the unit performs well in actual use. It is easy to drive and produces wide range sound with a good pair of loudspeakers, especially in the FM mode. In the AM mode, in wideband operation, it also sounds quite a deal better than we have come to expect with AM car reception.

Stereo separation is quoted as being less in the AM mode than for FM; 40dB at 1kHz for FM versus 30dB for AM. In practice, both figures are more than adequate for good stereo effect and there is little to pick between the two modes on normal program material.

In summary, the Pioneer must be rated as a good buy. It provides all the convenience features of a frequency synthesised tuner, with Motorola C-QUAM decoding, four-way speaker operation and neat styling. Recommended retail price is \$349.


Further information on Pioneer car equipment can be obtained from most car sound system installers (L.D.S.)



**CLIFF
K9 KNOBS**

Quality Nylon, Matt Black Finish, 20x19mmφ w/coloured cap — red, black, white, green, yellow, grey, orange or blue.


	1 +	100 @
Push Fix	.50	.37
Push Fix w/Mark Line	.55	.43
Screw Fix	.70	.57
Screw Fix w/Mark Line	.80	.63



**CLIFF
PCB SPACERS**

Nylon w/centre flat section that can be gripped while fixing. Fixing by size 6 or 8 self-tapper or 1/4in φ rivet into each end.


	1 +	100 +
Length	.09	.065
1/4in	.10	.072
1in	.11	.08
1 1/2in	.16	.126



**CLIFF
T03 INSULATOR PAD**

Simply mount on the under side of the heatsink to insulate fixing screws and device pins — speeds mounting.

1 + .16; 100 + .13



**CLIFF
S2 SERIES 6.5mm SOCKETS**

Quality nylon (earth isolated) with break (B), single (S) or make (M) contacts. Contact material is nickel-silver alloy. Colours — white, black, red, grey.

	1 +	100 +
S2 SNB Mono	.60	.47
S2 BNB Mono	.60	.47
S2 MNM Mono	.60	.47
S2 BBB Stereo	.78	.65
S2 SSS Stereo	.63	.48
S2 MMM Stereo	.78	.65

DELSOUND

Australian Distributor for Cliff

PTY LTD, 1 Wickham Terrace (cnr Wharf St), Brisbane

Ph: (07) 229 6155. Telex: AA44442

Australia's inaugural hifi awards

CESA hifi Grand Prix awards

Six products have been declared winners in their various categories for Australia's inaugural hifi industry awards. They are all familiar brand names: Aiwa, KEF, Luxman, NAD and Yamaha, which won two awards.

by LEO SIMPSON

As noted in the Editorial for the January 1985 issue, Australia now has an annual hifi industry award. Hosted by CESA, the Consumer Electronic Suppliers Association, they are to be known as the "CESA Grand Prix Awards", a mouthful if ever there was one.

The concept of Australian hifi awards has been a gleam in the eyes of a number of people in the hifi industry for a long time but it is only now that it has come to fruition. They have started off rather quietly, with not a few hifi distributors taking the attitude that they would "sit back and see how it goes". For that reason and the lack of prior promotion, the inaugural awards do not feature some very well known and deserving models.

Eight categories were proposed for the inaugural awards. They were to be for best amplifier, tuner, receiver, compact disc player, cassette deck, turntable, loudspeaker system and a special category tentatively labelled "technological development".

Judging such awards is no simple matter. Nor are the logistics. To simplify matters, the organising committee of the Consumer Electronics Suppliers Association, the host organisation for the awards, decided that individual distributors would have to submit their products for consideration.

The submissions would be all collected together by CESA and handed over to an independent judging committee made up of journalists who regularly write on the subject of high fidelity.

The judging committee would first consider the products on the basis of their technical specifications, value for money and popularity in the marketplace.

Then, if the judges found it necessary to make up a "short list" for final consideration, they could obtain the actual products for evaluation.

This is what actually happened in practice. The three journalists on the committee were: Greg Borrowman, editor Australian Hifi and contributor to the *Melbourne Herald*, David Frith who

writes for the *National Times* and the *Sydney Morning Herald* and myself.

It would have been very appropriate to also have Dennis Lingane, a freelance audio journalist of considerable reputation and prime mover for the awards on the judging committee, but his domicile in Perth, WA, made that not feasible for this year.

Let us discuss each category in turn and the products submitted.

Amplifiers

Six amplifiers or preamplifier/amplifier combinations were submitted for consideration in this category. They were the Aiwa GX110 and BX110 preamp/power amplifier, the Dual CV1460 integrated amplifier, the NEC A-11E amplifier, the Luxman C-05 and M-05 preamp/power amplifier and the Yamaha A-500 integrated amplifier.

Being the inaugural awards, the judges decided to make up a few rules as they went along, to legitimise matters. The first of these rules was that the product must be generally available if at all possible. No particular problem there, which was not surprising since the distributors could be relied on to only submit current products.

The second rule was tougher though. It specified that any product to be considered must be available separately and not just as part of a complete rack system. The reasoning behind this was that a particular rack component might



The NAD 7140 won the receiver Grand Prix award by reason of its high performance and circuit innovations.

well be worthy of an award but it could be teamed with components of lesser calibre, which would take away some of the attraction of buying an award-winning component for the buyer.

This rule was tough on Aiwa because its submitted preamp/power amplifier combination is only available in a rack system. So is their TX-110 tuner which was also submitted. Aiwa did not miss out completely though, as we shall see.

Of the remaining five products in the amplifier category, two stood out. The Yamaha A-500 and the Luxman combination. The Yamaha amplifier is keenly priced for its specs and very popular in the marketplace but, when you came right down to the nitty-gritty, not really outstanding. Rather, it is a good all-rounder. So the judges decided to go right over the top and opt for the very expensive Luxman. This is clearly an outstanding combination although few people can afford it.

Receivers

Only two models were submitted for this category, the Sharp SA-107 and the NAD 7140. Under several criteria, the laurels went to the NAD. The 7140 does not really have the looks of a winner. It is spartan in the extreme, as are all NAD products but its performance is very good and it has a number of innovative features which place it well to the forefront of receiver design.

First and foremost, it has very high music power output compared to its relatively low continuous power ratings. It is rated at only 40 watts continuous per channel into 8Ω loads but will easily deliver twice that power on a short term basis.

In addition it incorporates a soft-clipping circuit so that its effective power, or if you like, ultimate loudness before noticeable clipping occurs, is considerably higher than its nominal ratings suggest.


On the tuner side, the NAD incorporates the clever Schotz dynamic high blend circuit which greatly increases the apparent signal to noise ratio in the stereo mode on weak signals.

Clearly, the NAD was the winner in a race of two but it could have placed very favourably amongst a field of all-comers. The judges had no qualms in making the award.

Tuners

Only two models were considered in this category, the Aiwa TX-110 and the Yamaha T-80. This amounted to a no-contest, after the elimination of the TX-110, as explained above. But it was not as easy as that for the Yamaha. The judges seriously considered whether they should make an award at all.

The Yamaha T-80 is certainly a good

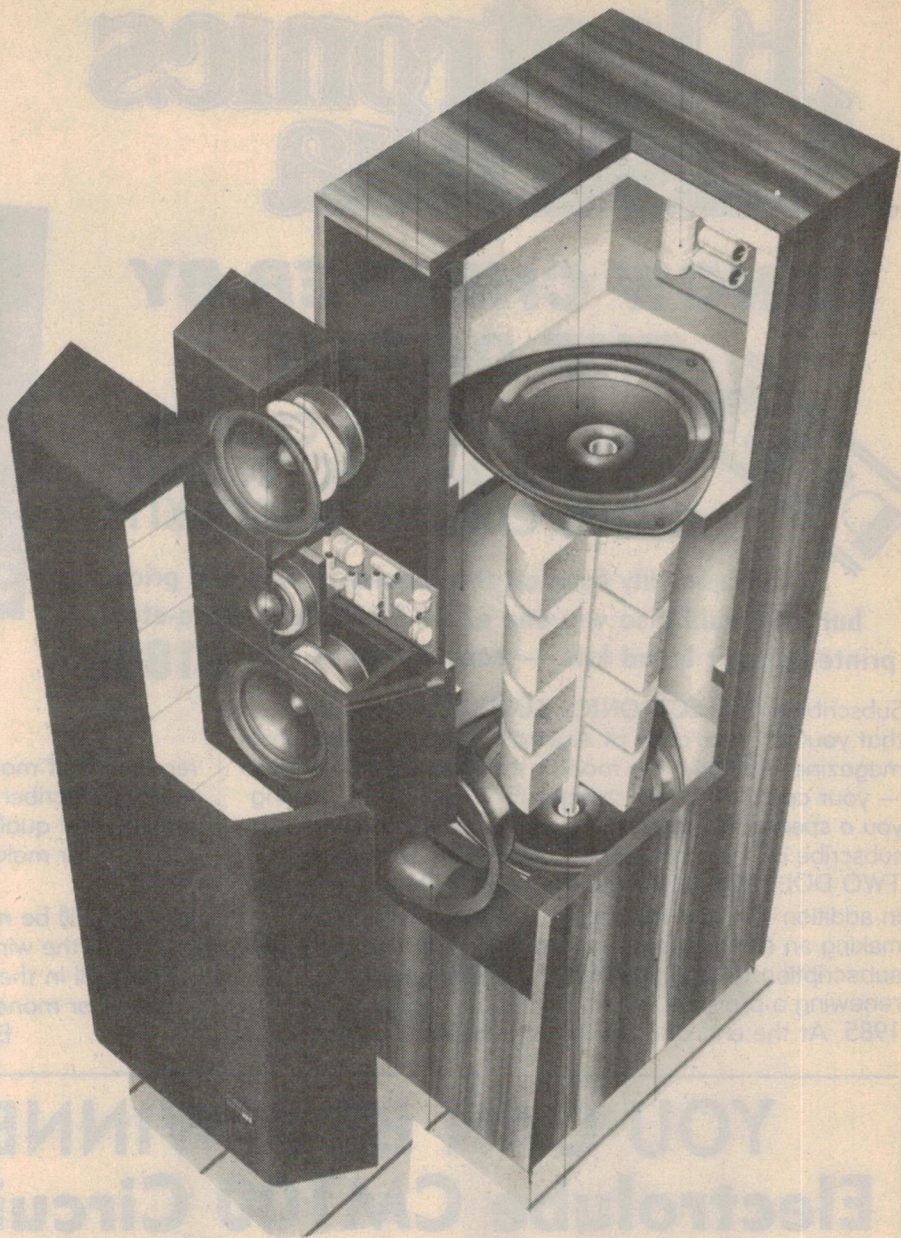

The KEF 104.2 won the Grand Prix award for loudspeaker systems because of its clear lead in technological innovation and outstanding sound quality.

frequency synthesised tuner, with Yamaha's zero intermodulation mixer circuit, low distortion FM detector and an RF control which is desirable in very strong signal areas. But it can only be regarded as cheap and nasty as far as the AM side is concerned. On balance though, the Yamaha got the nod, since there are presently no AM/FM tuners which could be regarded as offering a high standard of AM reception.

Cassette decks

Three decks were entered in this category, the Aiwa ADF-990, the Dual C-844 and the Sharp RT-107. One model stood out clearly for performance, value-for-money and styling, the Aiwa. A three-head deck with automatic bias and

equalisation, Dolby B, C and dbx noise reduction and very jazzy styling, it also could have placed well against much tougher competition.

Turntables

Five brands of turntables were entered. They were: Dual CS-505 Mk II, NAD 5120, Rotel RP-850, Sharp RP-107 and the Aurex SR-L7F by Toshiba. Here the judges were placed in a quandary. None of the turntables was regarded as being particularly outstanding or innovative. Sure, the NAD has its floppy printed circuit board tonearm which can be regarded as innovative but it has not been well received by buyers.

On the face of it, the judges had five

Electronics Australia

**IS NOW CHEAPER BY
THE DOZEN**

PLUS

**YOU HAVE THE CHANCE
TO WIN AN ELECTROLUBE
CM100 CIRCUIT MAKER KIT!**

You'll not only save on the regular news-stand price, but you could also win one of six Electrolube photo-etch printed circuit board kits — each valued at over **\$180!**

Subscribing to **ELECTRONICS AUSTRALIA** will ensure that you get your copy of Australia's leading electronics magazine reliably every month. It's more convenient too — your copy will come straight to your mailbox, saving you a special trip to pick one up. And of course if you subscribe at the moment, you'll actually **SAVE** over TWO DOLLARS FIFTY on the regular news-stand price. In addition to this price saving, we're currently also making an exciting new offer to anyone taking out a new subscription to **ELECTRONICS AUSTRALIA**, or renewing a previous subscription before May 31st, 1985. At the end of each month, all of the subscriptions

received that month will be placed in a barrel, and TWO lucky subscribers each month will win a comprehensive, professional quality Electrolube CM100 Circuit Maker Kit for making photo-etched printed circuit boards.

Each kit is valued at over \$180.

Winners will be notified by telegram and letter after each drawing of the winning subscription cards from the barrel.

Simply fill in the card opposite, and send it with either a cheque or money order, or with your American Express, Bankcard or Mastercard number filled in.



YOU CAN BE A WINNER OF THE Electrolube CM100 Circuit Maker Kit

The CM100 Circuit Maker Kit is the latest addition to the well-known Electrolube range of chemicals and service aids for the electronics industry. It contains virtually everything you need to make high quality printed circuit boards using the photo-etch method, from either your own tape patterns or from same-size printed layouts. No darkroom or camera is necessary.

The kit contains the following:

- 12 sheets of autopositive film.
- 6 double-sided fibreglass blank boards, all measuring 160 x 100mm (Eurocard size).
- Universal exposure and assembly frame.
- A Photoflood lamp.

All necessary chemicals:

- developers • fixer • film clearing solution
- photoresist • copper etchant • and a combined soldering flux/protective lacquer
- A complete set of photographic dishes.
- A liquid measure.

- A retouching pen.
- A liquid-crystal thermometer.
- A couple of 1.1mm PCB drills.

And all extras like:

- Plastic gloves.
- A photoresist applicator.
- Cotton wool.
- Film clips.
- A scouring pad.
- And a full set of step by step instructions.



NOTE: The above competition does not apply to readers in Queensland or South Australia, due to the laws relating to lotteries in those states.
NSW Lottery Permit No. TC84/2457
Victoria Lottery Permit No. 84/884

Australia's inaugural hifi awards


stayers but no odds-on favourite. They then came to the decision that no award should be made. The idea here was that the future of the awards had to be considered. A high standard had to be set at the outset otherwise the awards would be regarded as of little importance.

Compact Disc Players

This category was quite disappointing as far as the judges were concerned. In no other category are there so many new products and so much interest being generated amongst consumers. After all, it is the compact disc player which is the product most likely to rejuvenate the flagging hifi market place.

Only three models were submitted: the NEC CD-705E, the Toshiba XR-Z70 and the Yamaha CD-2. The judges seriously considered the last two. After an exhaustive comparison test they unanimously preferred the brighter sound quality of the Toshiba player but the Yamaha won out by reason of its low price (\$699) for a remote control deck, its better tracking and error correction and its innovative second-generation technology.

The Luxman C-05 and M-05 are expensive but offer superior performance. The M-05 is rated at 105 watts/channel in class-A and 400 watts/channel in class-AB.

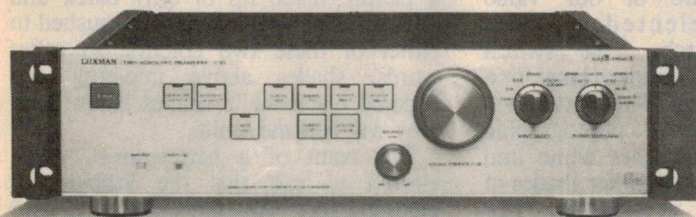

Loudspeakers

Four loudspeaker systems were submitted: Bose 901-V, Boston Acoustics A-70, KEF 104.2 and the Stax F83. Of these, the Bose and the KEF are the most interesting but the Bose was judged to be essentially a long running design, albeit now highly refined in its fifth variant. The KEF stood head and shoulders above the rest. It is clearly innovative, has superlative sound and is very good value for money.

In fact there are so many innovations in the KEF 104.2, it is difficult to know where to start. There are the vertically opposed drivers coupled into a common cavity and hydraulically designed (to assure low air turbulence) bass port, the chassisless midrange drivers and high efficiency ferro-fluid cooled tweeter.

There is also the exceptional matching between stereo pairs, the impedance equalisation which presents a flat 4Ω resistive load to the amplifier over the whole audio spectrum, the tilted-up listening axis to suit most listeners' requirements and the automatic overload protection. At a price of around \$2000 before the recent currency


problems it was and still is an outstanding loudspeaker. It would probably still be the winner against all comers.

Technological development

This category was also a disappointment for the judges. It could have easily embraced one of the new second-generation CD players or one of the hifi VCRs. But there were no product submissions. What were submitted were the Bose 1201 car sound system, the ITT Tricon combined television and hifi system, and the Shure V15-MR moving magnet cartridge.

The first two were not seriously considered by the judges and the Shure cartridge was regarded as an excellent product but one which was evolutionary rather than revolutionary. No award was therefore made.

Let us hope that next year's awards, which are open for submissions in August 1985, are much better patronised by Australian hifi industry. And let us hope that there will be a video category products since video and audio are rapidly converging on the home entertainment scene.

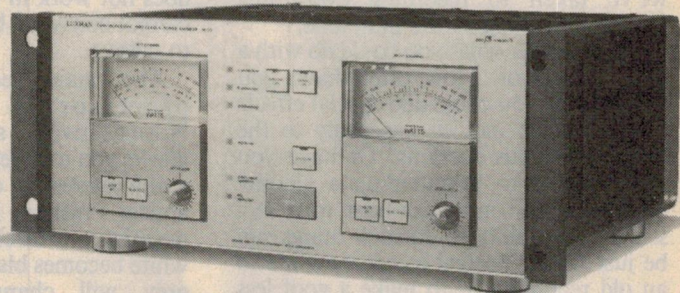

IAN J. TRUSCOTT'S

ELECTRONIC WORLD

Now, bigger and better than ever, in their new large premises.

● KITS, TOOLS ● COMPONENTS ● BOOKS, ETC.

Products from Dick Smith and Altronics. Every need for the Electronics Hobbyist.

NOW OPEN TILL 9pm FRIDAYS

ELECTRONIC WORLD,

CNR. LACEY ST. & WINDSOR RD.,

CROYDON, VIC. 3136

Tel: (03) 723 3860

Special effects for your home movies

Ever thought of adding special effects to your video recordings? Commercial effects units cost a fortune but this unit can be built for less than \$70. It provides the following features: inverse video, colour removal, lithographic picture and contrast enhancement.

by FRANCO UBAUDI

Video movie-making seems to be the in thing these days. Video cassette recorders and cameras have flooded into our homes during the last five years and we've taken to recording everything from the exciting to the mundane.

So just think what you could do with a video processor. How often have you wished that you could add special effects to your video movies, especially to the more humorous portions? Or have you ever wanted to brighten up a gloomy picture or add more contrast to a dull scene? The ability to do such things can be just what's needed to add new life to an old recording or to make a goof less obvious.

While it is only a low-cost unit, our new Video Processor boasts a number of really worthwhile features. In use, it is interposed between the camera and the VCR, and the front panel controls set to give the required effect. Alternatively, you can interpose the unit between your VCR and the TV set. The only proviso here is that the TV must have a video input socket.

Main features

What exactly does the unit do? This can be best explained by taking a close look at the front panel controls.

As can be seen, the front panel of the Video Processor carries four toggle switches and three control knobs. On the left is the power switch. It must be switched on at all times, even if only to allow a video signal to pass through unaffected. The accompanying red LED provides power on/off indication.

Next is the Colour:B/W selector. Its function is self-explanatory — it simply turns a colour picture into a black and white picture. Unfortunately, this switch does not work in the reverse sense; ie, it cannot convert a black and white picture to colour.

The main feature of our video processor is selected by the Normal/Invert switch. This switch allows you to invert the video signal for a really interesting effect. The picture will appear rather like a photographic negative — black becomes white and white becomes black. All other shades of grey will change accordingly. For example, a light shade will become darker.

The colour on the other hand, does not change — only its shade. This is because we are effectively only inverting the luminance signal. As a result, light colours will become darker and vice versa.

In fact, the Normal/Invert switch is particularly useful when watching the cricket. If the Aussies are playing the West Indies and getting murdered, just flick the invert switch and all will be well. Handy little gadget, isn't it?


The remaining switch on the front panel is the Analog/Discrete signal selector switch. When selected to the analog position, this allows the video signal to pass through the processor as an analog signal.

On the other hand, if the Discrete position is selected, the video signal will be processed into a two level signal. The effect of this is to change any signal into a picture made up of only black and white — all shades of grey are pushed to either of these two colours. In other words, shades above mid-grey will become black while shades below mid-grey will become white.

For want of a better term, we've elected to call this the lithographic picture effect. This process can be used in conjunction with signal inversion if required.



The Video Processor is housed in an attractive metal console case.

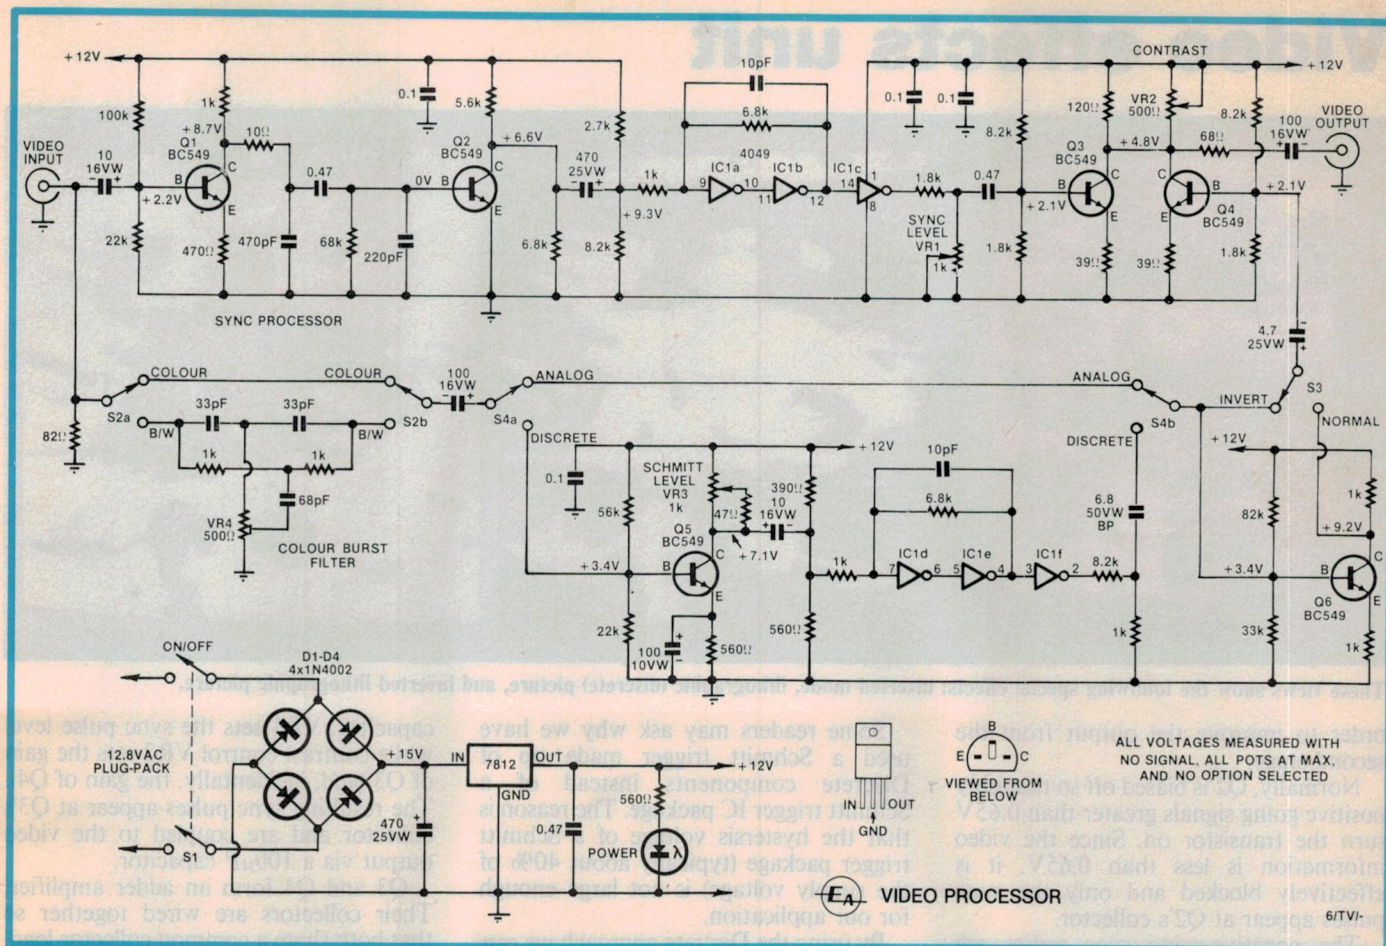

Control knobs

Now let's take a look at the various control knobs. The first knob sets the size or amplitude of the sync signal. This adjustment is necessary because signal processing affects the amplitude of the sync signal and we need to restore it to normal.

Next is the Contrast control knob which varies the amplitude of the video signal to give a full range of tonal values between black and white. If the amplitude of the video signal is too high, some of the darker greys will be reproduced as black while lighter greys will become white.

Conversely, if the video amplitude is too low, we will not get the full tonal gradation from black to white.

The final control, the Schmitt Level knob, is used only when the Discrete option is selected. This control varies the amount of signal which is converted into one of two levels, either black or white.

How it works

Six NPN transistors and one 4049 hex inverter IC make up the circuit for the Video Processor.

So why have transistor amplifier stages been used instead of op amps? The reason for this is quite simple: a video signal includes frequency components of

The circuit consists of a sync processor (Q1-Q3) and a video processor (Q5-Q6).

the order of several megahertz. No cheap, readily available op amp is capable of operating at such high frequencies.

Basically, the circuit can be split into two sections: a sync processor and a signal processor. Let's start with the sync processor. This comprises transistors Q1, Q2 and Q3, and inverter stages IC1a, b and c.


Transistor Q1 functions as an inverter stage with a gain of two. While this stage inverts the entire video waveform, its primary function is to invert the sync pulse. The signal output is extracted from Q1's collector and fed via a low pass filter (10Ω and 470pF) to a second inverting transistor stage, Q2.

The filter is used to remove as much unnecessary signal content as possible in



Normal on-screen picture. Compare this with the photographs on page 36.

Video effects unit

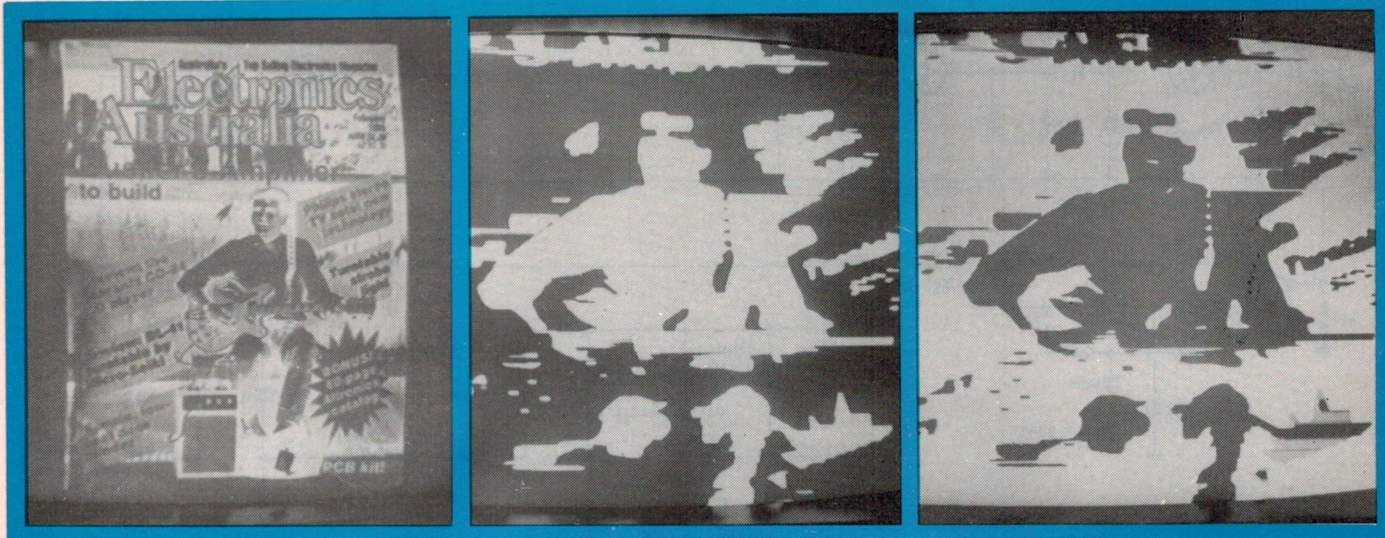

These views show the following special effects: inverted mode, lithographic (discrete) picture, and inverted lithographic picture.

order to improve the output from the second stage.

Normally, Q2 is biased off so that only positive-going signals greater than 0.65V turn the transistor on. Since the video information is less than 0.65V, it is effectively blocked and only the sync pulses appear at Q2's collector.

The negative-going sync pulses are now fed to a 470 μ F capacitor, re-biased and applied to a Schmitt trigger stage consisting of IC1a, 1b and the associated 1k Ω and 6.8k Ω resistors. This stage amplifies and cleans up the sync pulse to ensure a jitter-free picture.

Some readers may ask why we have used a Schmitt trigger made up of Discrete components instead of a Schmitt trigger IC package. The reason is that the hysteresis voltage of a Schmitt trigger package (typically about 40% of the supply voltage) is not large enough for our application.

By using the Discrete approach we can set the hysteresis voltage to the level required. The resistor values shown give a hysteresis of about 8V.

Finally, the amplified sync pulses are inverted by IC1c and coupled to the base of Q3 via a voltage divider and a 0.47 μ F

capacitor. VR1 sets the sync pulse level while contrast control VR2 sets the gain of Q3 (and, incidentally, the gain of Q4). The resulting sync pulses appear at Q3's collector and are coupled to the video output via a 100 μ F capacitor.

Q3 and Q4 form an adder amplifier. Their collectors are wired together so that both share a common collector load. As a result, signals appearing at the collector of Q3 are algebraically added to any signals appearing at the collector of Q4.

Signal processing


Let's now take a look at the signal processing circuitry. Its main components are a colour burst filter, common emitter amplifier Q5, inverters IC1d, e and f, and common emitter stage Q6.

Switches S2, S3 and S4 select the various effects. When switched to the positions shown on the circuit diagram, the video input signal is directly coupled to the base of Q4 via a 4.7 μ F capacitor. Since Q4 is an inverting amplifier, the video output signal at its collector will be inverted.

Note, however, that the sync pulses appearing at the video output socket will be of the correct polarity due to adder stage Q3, Q4. It's really very simple: a large amplitude sync signal from Q3 is added to the smaller, inverted sync pulses from Q4 to produce a sync signal of the correct amplitude and polarity.


During use, VR1 is simply adjusted for a stable, jitter-free picture.

Obtaining an inverted video image is thus quite easy. All we have to do is couple the video signal to an inverting transistor stage (Q4) and then add in sync pulses of the correct polarity and

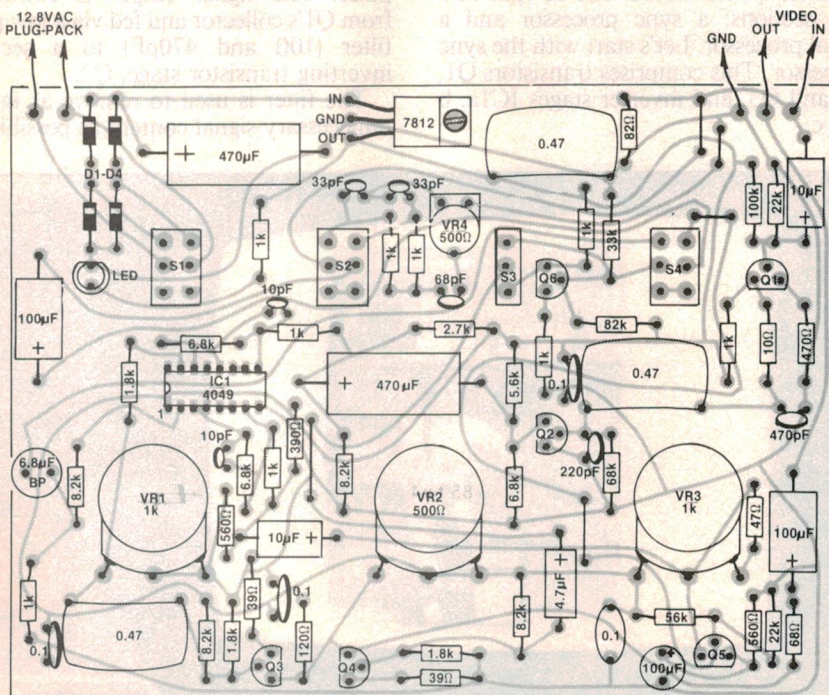

Parts overlay diagram. The pot lugs are soldered to PC stakes.

March, April, May 1985
SPECIAL OFFER

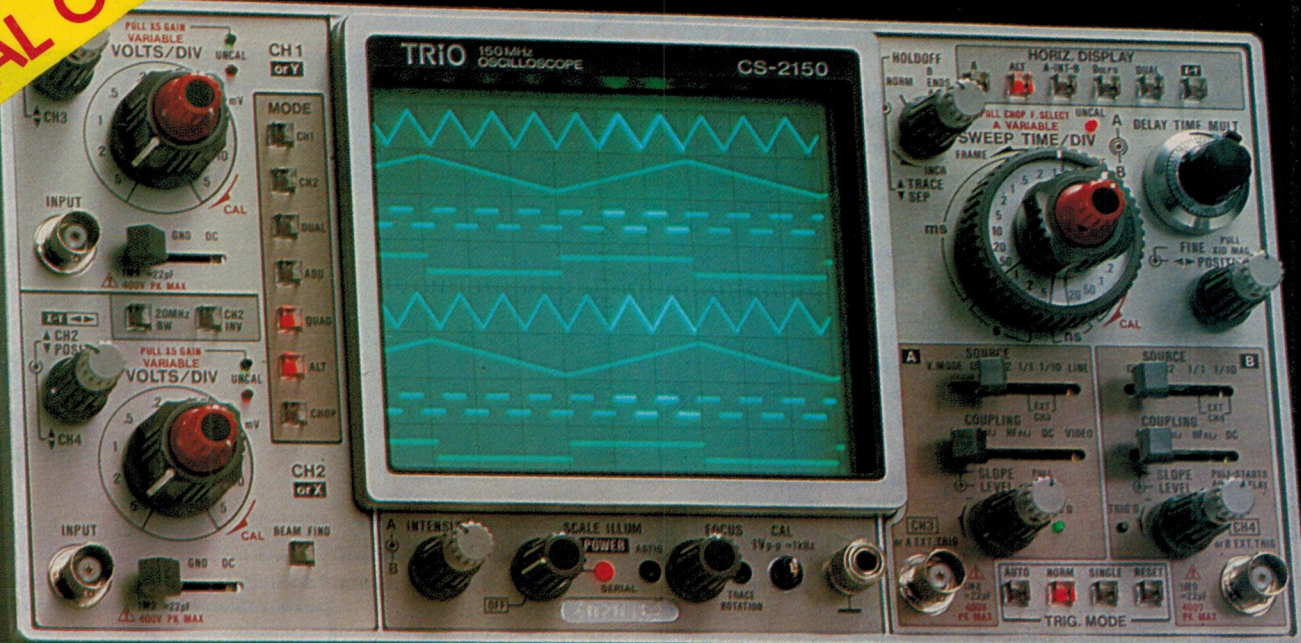

Now you can afford Trio-Kenwood quality

Here's a chance for you to buy Trio-Kenwood at a price you'd expect to pay for an ordinary oscilloscope. And until April 1985 you'll get two free probes with every Trio-Kenwood CRO. That's a saving of \$158 with the CS-2150, and \$66 on the others (at tax free prices).

From 20MHz to 150MHz, there's a Trio-Kenwood CRO that will solve your problems. All are built to perform. Reliably. Accurately. And now they're priced affordably.

CHOOSE FROM THESE VERSATILE MODELS:

Model	Bandwidth	Channels	Trace	Sensitivity	Tax Free	Tax Paid
CS-1022	20 MHz	2	2	1mV/div	\$795	\$914.25
CS-1040	40 MHz	3	6	1mV/div	\$1395	\$1604.25
CS-1060	60 MHz	3	6	1mV/div	\$1795	\$2064.25
CS-2075	75 MHz	4	8	1mV/div	\$2425	\$2788.25
CS-2110	100 MHz	4	8	1mV/div	\$2895	\$3329.25
CS-2150	150 MHz	4	8	1mV/div	\$2995	\$3444.25
PROBES						
88100	100 MHz				\$235	\$239
99125	250 MHz				\$295	\$294

Included FREE

Prices subject to change without notice.

SYDNEY:

41 Herbert St., Artarmon, N.S.W.
P.O. Box 573, Artarmon, N.S.W. 2064
Phone (02) 439 3288. Telex AA25021

MELBOURNE:

53 Governor Rd., Mordialloc, Vic.
P.O. Box 122, Mordialloc, Vic. 3195
Phone (03) 580 7444. Telex AA33012

The 150MHz CS-2150 shown is our new top of the line model. It's been designed to meet the testing needs of the latest technology. Satellites. Compact discs. Manufacturing and design automation. Local area networks. These fields are making demands that few oscilloscopes can meet. The CS-2150 meets them. Take a look at these features.

- ☐ High vertical axis sensitivity of 1mV/div
- ☐ 2nS/div sweep for observation of high speed signals
- ☐ Delayed sweep for partial waveform expansion
- ☐ Four-channel/eight-trace. ☐ $\pm 2\%$ accuracy
- ☐ Dual sweep to observe two widely different signals
- ☐ Bright, sharp 150mm rectangular CRT
- ☐ Guaranteed channel-to-channel time accuracy
- ☐ Optimum multi-clamping of video signals

Call either of our showrooms for more information or to arrange a demonstration of our full range of oscilloscopes. Our sales engineers really know Trio-Kenwood. And they'll make sure you get the scope you need. At the right price.

PARAMETERS LTD
PERFECTION IN MEASUREMENT

Video effects unit

amplitude (Q3).

Suppose now that S2 is switched to the Normal position. The video signal is now fed to unity gain inverter Q6 before passing to Q4 in the adder amplifier. Thus, with S3 in the Normal position, the signal undergoes two stages of inversion and a normal (unprocessed) signal appears at the video output socket.

Switch S2 selects either a colour or B/W picture. Actually, removing the colour information from a video signal is not all that easy and requires quite complex circuitry. Fortunately, there is a simpler solution!

A colour TV set can only reproduce a colour picture if it receives a colour burst signal. This signal normally serves as a phase reference for the colour decoder. If the colour burst signal amplitude drops below a preset level, or if the signal is removed, the colour killer circuitry cuts in and "kills" the colour.

That makes our job easy — we can convert a colour picture to B/W simply by filtering out the 4.43MHz colour burst signal.

This function is performed by a passive twin T filter network consisting of VR4 and its associated components. When S2 is switched to the B/W position, the filter inserts a deep notch in the video waveform at 4.43MHz to effectively remove the colour burst signal. Trimpot VR4 enables the filter to be adjusted to the correct centre frequency.


Unfortunately, the colour burst filter also filters out some of the wanted video information, giving a slight degradation in picture quality. In particular, there is some loss of picture sharpness and detail. These losses are not serious, however, and are a small price to pay in order to keep the circuit simple.

The final section of the signal processor is based on inverting amplifier Q5 and Schmitt trigger IC1d, e.

Here's how it works. When S4 selects the Discrete position, the video signal is fed to common emitter amplifier Q5 which has variable AC gain as set by VR3. Q5 amplifies the video signal and feeds it to the Schmitt trigger which effectively removes all "greys" from the picture.

In effect, some of the greys are pushed to white and the darker greys are pushed into black. VR3 varies the amplitude of the video signal so that low contrast pictures (eg, night-time scenes) operate the Schmitt trigger.

Inverter IC1f provides polarity correction of the Schmitt trigger output. From there, the signal is applied to a resistive divider which sets the video

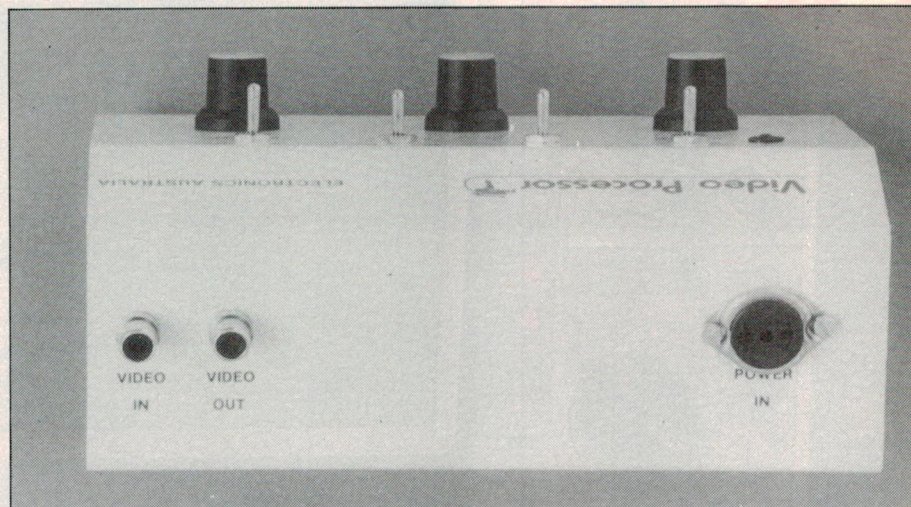

The rear panel carries RCA video input and output sockets and a power input socket.

level and then coupled to S4b via a 6.8μF bipolar electrolytic capacitor. Depending on the setting of S3, the signal is then either fed to inverting stage Q6 or coupled directly into Q4 in the adder amplifier.

Power supply

The power supply uses a 12VAC plugpack transformer to drive a bridge rectifier (D1-D4) and a 470μF filter capacitor. This provides about 15VDC and this is fed to a 12V 3-terminal regulator (7812). The regulated 12V DC powers all the circuitry, including an indicator LED wired across the supply rails in series with a 560Ω resistor.

Construction

The Video Processor is housed in an attractive metal case with a sloping front panel. Of New Zealand manufacture, this case features a sturdy aluminium base finished in grey enamel and fitted with small rubber feet. The top cover has a contrasting white finish and is secured to the base by four self-tapping screws.

A Scotchcal front panel artwork was used to give the unit a professional appearance. This artwork is reproduced full-size with this article.

All the circuitry, including the pots and switches, is accommodated on a printed circuit board measuring 162mm x 121mm and coded 85tv4.

Begin construction by assembling the PC board according to the wiring diagram. No special procedure need be followed although we suggest that the smaller components be installed first. The LED should initially be solder-tacked at the extremities of its leads.

Note that the 0.47μF capacitors should rest against the PC board as

PARTS LIST

- 1 PC board, code 85tv4, 162mm x 121mm
- 1 metal console box, 175(W) x 150(D) x 25(hf) x 60mm(hr), Betacom IC5-2
- 1 Scotchcal front panel, 170mm x 255mm
- 1 12VAC plugpack transformer
- 3 DPDT miniature toggle switches
- 1 SPDT miniature toggle switch
- 3 control knobs
- 1 socket to suit plugpack transformer
- 2 panel-mounting RCA sockets
- 14 PC stakes

Semiconductors

- 4 1N4002 diodes
- 1 7812 12V 3-terminal regulator
- 1 red LED plus mounting bezel
- 1 4049 hex inverter/buffer
- 6 BC549 NPN transistors

Capacitors

- 2 470μF 25V axial electrolytics
- 3 100μF 16V axial electrolytics
- 2 10μF 16V axial electrolytics
- 1 6.8μF 50V bipolar PC-mounting electrolytic
- 1 4.7μF 25V axial electrolytic
- 3 0.47μF polyester (greencap)
- 4 0.1μF ceramic
- 1 470pF ceramic
- 1 220pF ceramic
- 1 68pF ceramic
- 2 33pF ceramic
- 2 10pF ceramic

Resistors (0.25W, 5% tolerance)

- 1 x 100kΩ, 1 x 82kΩ, 1 x 68kΩ, 1 x 56kΩ, 1 x 33kΩ, 2 x 22kΩ, 4 x 8.2kΩ, 3 x 6.8kΩ, 1 x 5.6kΩ, 1 x 2.7kΩ, 3 x 1.8kΩ, 8 x 1kΩ, 3 x 560Ω, 1 x 470Ω, 1 x 390Ω, 1 x 120Ω, 1 x 82Ω, 1 x 68Ω, 1 x 47Ω, 2 x 39Ω, 1 x 10Ω.

IN
POWER



IN
VIDEO
OUT
VIDEO



Video Processor

ELECTRONICS AUSTRALIA

COLOUR

NORMAL

ANALOG

POWER

B/W

INVERT

DISCRETE

SYNC
LEVEL

CONTRAST

SCHMITT
LEVEL

The world's first and only Automatic Microphone System. From Shure.


Shure's new Automatic Microphone System (AMS) provides complementary microphones, mixers and logic circuitry to solve the problems brought on by multiple microphone installations. For the first time ever, Shure has combined unique microphone, mixer and logic technology into a dedicated, totally integrated system.

Smart Microphones.

Each microphone/mixer channel contains logic circuitry so each microphone actuates only when addressed and continuously analyses its own local acoustic environment. Sensitivity and threshold adjustments are eliminated.

Two microphone styles. The surface mount AMS22 Low Profile and the sleek AMS26 Probe Microphone.

No clicks, pops, noise 'pumping' or missed syllables. Automatic gain com-

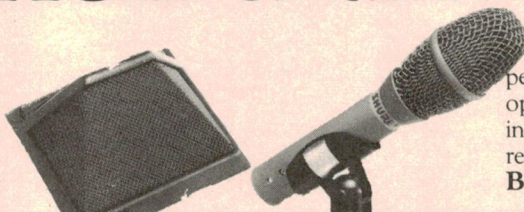

SHURE

Audio Engineers 342 Kent St.,

Sydney 2000 (02) 29 6731

Queensland (07) 44 8947

Western Aust. (09) 361 5954

pensation prevents acoustic feedback. The operator's only concern is adjusting the individual volume controls. No need for repeated adjustment.

Built for the future. ☐ Privacy button

☐ Chairman muting

☐ Channel priority

☐ Filibuster capability allows only one microphone on at a time to prevent interruptions. ☐ Zone loud-speaker muting

☐ Remote channel indicators AMS mixers can be linked to effectively control over 200 individual microphones. When connected with the optional Shure AMS880 Video Switcher Interface, the AMS will control commercial video switchers.

The Shure AMS — a sound revolution wherever speech related multi-microphone systems are involved.

Art Express 923 1499

NAD

WHY DO THESE TWO COMPANIES KEEP WINNING HI-FI GRAND PRIX AWARDS THROUGHOUT THE WORLD?


the answer: — **ENGINEERING.** The Speaker Engineers

KEF

Both Companies are dedicated to the advancement of audio technology through engineering. NAD engineers step outside the laboratory to study actual listening environments and the effects of interaction between components in a complete audio system. The circuits and features of every NAD product are engineered for maximum efficiency and effectiveness. Maximum efficiency and sound quality regardless of power rating and price.


Since 1971, KEF has developed objective methods of evaluating loudspeaker performance using computer aided digital analysis. These techniques have been used in design, development, production and quality control. The result: — Matched drivers in reference series speakers for best possible stereo imaging, clarity and musical quality.


Grand Prix Awards are not handed out, they are awarded for performance and technological advancements. These two Companies have now been awarded in excess of a dozen Grand Prix Awards worldwide — now you know, why not audition them at your favourite dealer.

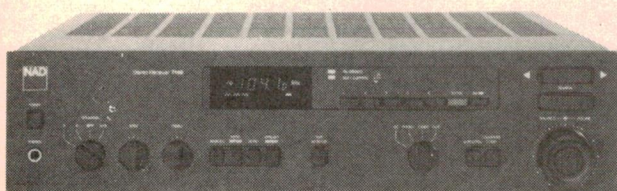

FALK ELECTROSOUND GROUP

BOX 234 ROCKDALE 2216
TELEPHONE 02/597 1111

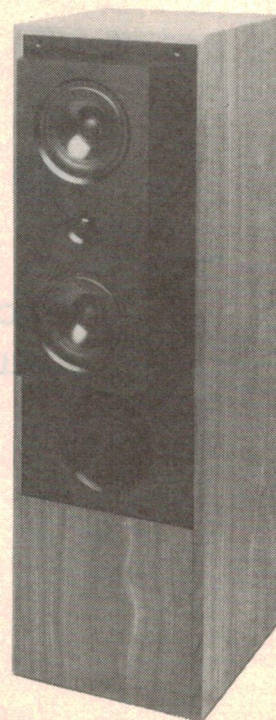

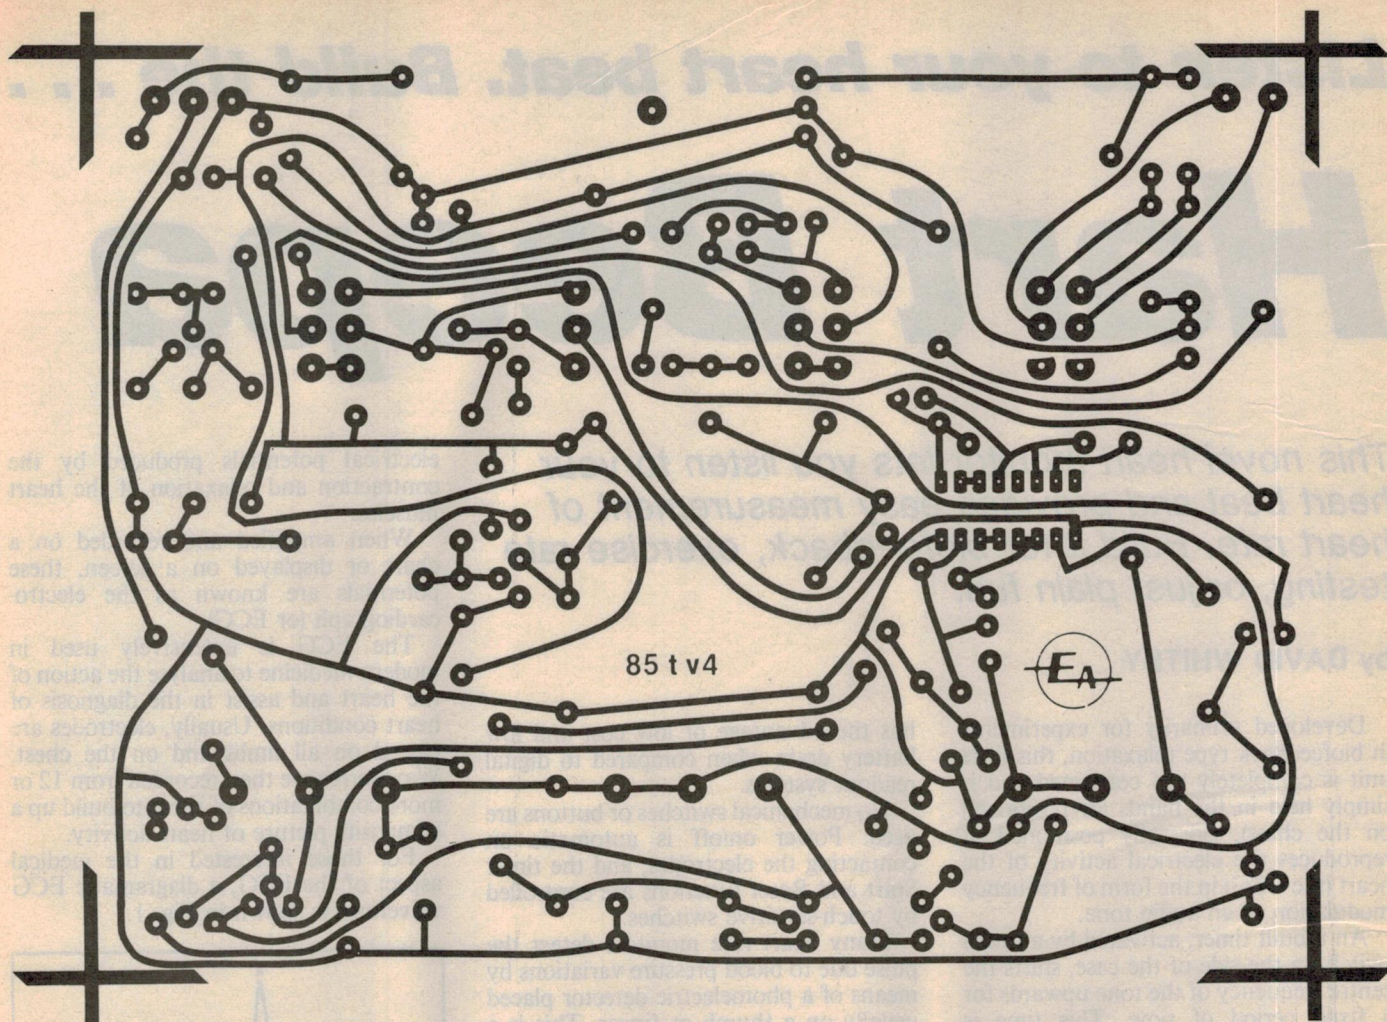

Video effects unit

shown in the wiring diagram. The metal tab of the 7812 regulator is mounted flat against the board and is secured using a small screw and nut.

PC stakes are used to terminate the external wiring connections and the pot lugs. The pots rest on the circuit board and should be mounted as close to the PC stakes as possible. Some judicious bending of the pot lugs will be necessary.

The four switches are soldered directly to the board. Make sure that they are correctly located before soldering. Check your work carefully and note the orientation of the semiconductors and electrolytic capacitors.

The PC board must be tested before it is mounted in the case. Connect a suitable video source (eg, a camera or VCR) to the input socket and a VCR or colour monitor to the output. Switch on, check the operation of the various controls, and adjust VR4 so that the unit "kills" the colour when the B/W option is selected.

In order to obtain a stable picture, it will usually be necessary to adjust the Sync and/or Contrast controls each time Invert or Normal are selected. Note that


there is a certain amount of interaction between these two controls.

Assuming the board checks out, your attention can be turned to the metalwork. Trim the Scotchcal label to size, then carefully affix it to the lid of the case. The case can now be drilled to accept the front and rear panel hardware.

We used two panel-mounting RCA

sockets for the video input and output connections. The only other item on the rear panel is the power socket.

Finally, the PC board can be secured to the lid by means of the switch and pot bushings, and the wiring to the rear panel completed. The LED is affixed to the front panel using a bezel. Note that it may be necessary to adjust the length of the LED leads.

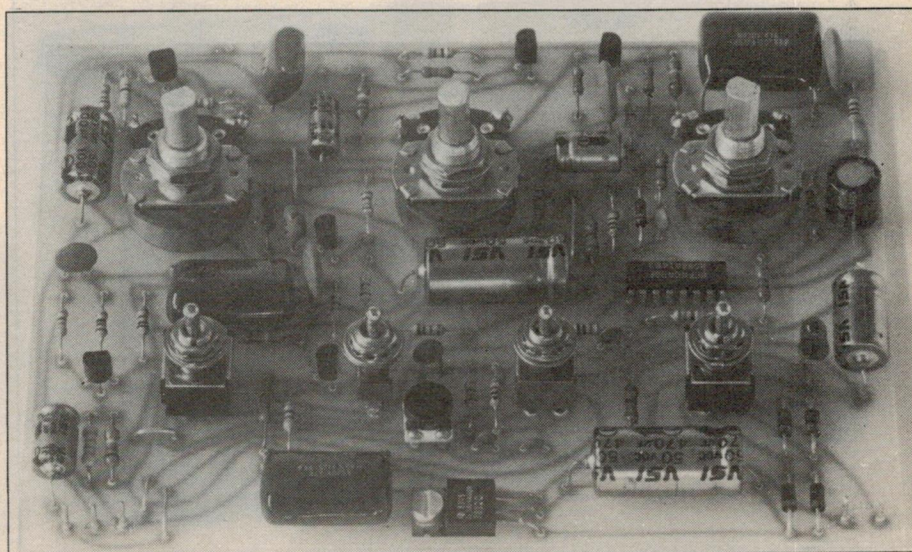

The final version differs slightly from this prototype board assembly.

Listen to your heart beat. Build the . . .

Hart Beepa

This novel heart monitor lets you listen to your heart beat and provides easy measurement of heart rate. Build it for biofeedback, exercise rate testing, or just plain fun.

by **DAVID WHITBY**

Developed primarily for experiments in biofeedback type relaxation, this little unit is completely self contained and is simply held in the hands (or positioned on the chest). Correctly positioned, it reproduces the electrical activity of the heart (the ECG) in the form of frequency modulation of an audio tone.

An inbuilt timer, activated by a touch switch on the side of the case, shifts the centre frequency of the tone upwards for a fixed period of time. This time is internally adjustable, but is best set to either 15, 20 or 30 seconds. By counting the beats which occur during this time and multiplying by the appropriate factor (4 for 15 seconds, 3 for 20 seconds or 2 for 30 seconds), the heart rate is obtained.

This method is simple and reliable and

has the advantage of low cost and low battery drain when compared to digital readout systems.

No mechanical switches or buttons are used. Power on/off is automatic on contacting the electrodes, and the timer Start and Reset functions are controlled by touch-sensitive switches.

Many heart rate monitors detect the pulse due to blood pressure variations by means of a photoelectric detector placed usually on a thumb or finger. This is a valid and useful method. It works well on most people, but problems can be encountered when blood pressure is on the low side or circulation is reduced due to cold temperatures or some other factor.

The *Hart Beepa* does not rely on the pulse. Instead it detects and amplifies the

electrical potentials produced by the contraction and relaxation of the heart muscles.

When amplified and recorded on a chart or displayed on a screen, these potentials are known as the electrocardiograph (or ECG).

The ECG is extensively used in modern medicine to analyse the action of the heart and assist in the diagnosis of heart conditions. Usually, electrodes are placed on all limbs and on the chest. Waveforms are then recorded from 12 or more combinations of these to build up a composite picture of heart activity.

For those interested in the medical aspect of the ECG, a diagrammatic ECG waveform is shown in Fig. 1.




Fig. 1: The ECG waveform includes the medically-designated P, Q, R, S and T waves.

By presenting the ECG as an audio tone, as in the *Hart Beepa*, it becomes possible to actually hear the individual parts of the waveform, especially when the heart rate is slowed down.

Biofeedback


This is a technique that has become popular in recent years. Basically it consists of monitoring a particular body parameter such as skin temperature, muscle activity, brain wave activity (EEG) or heart activity, and learning to relax and consciously change the reading to a more favourable level. This is said to lead to improved health and a sense of well being.

In the case of the heart, the exact rate is not at all critical and 60-100 beats per minute can be considered quite normal. The rate depends on many factors — small children may have rates over 150 beats per minutes. The heart rate also increases dramatically during strenuous exercise.

However, it may be generally stated



The Hart Beepa is housed in a plastic case with silk-screened lettering.

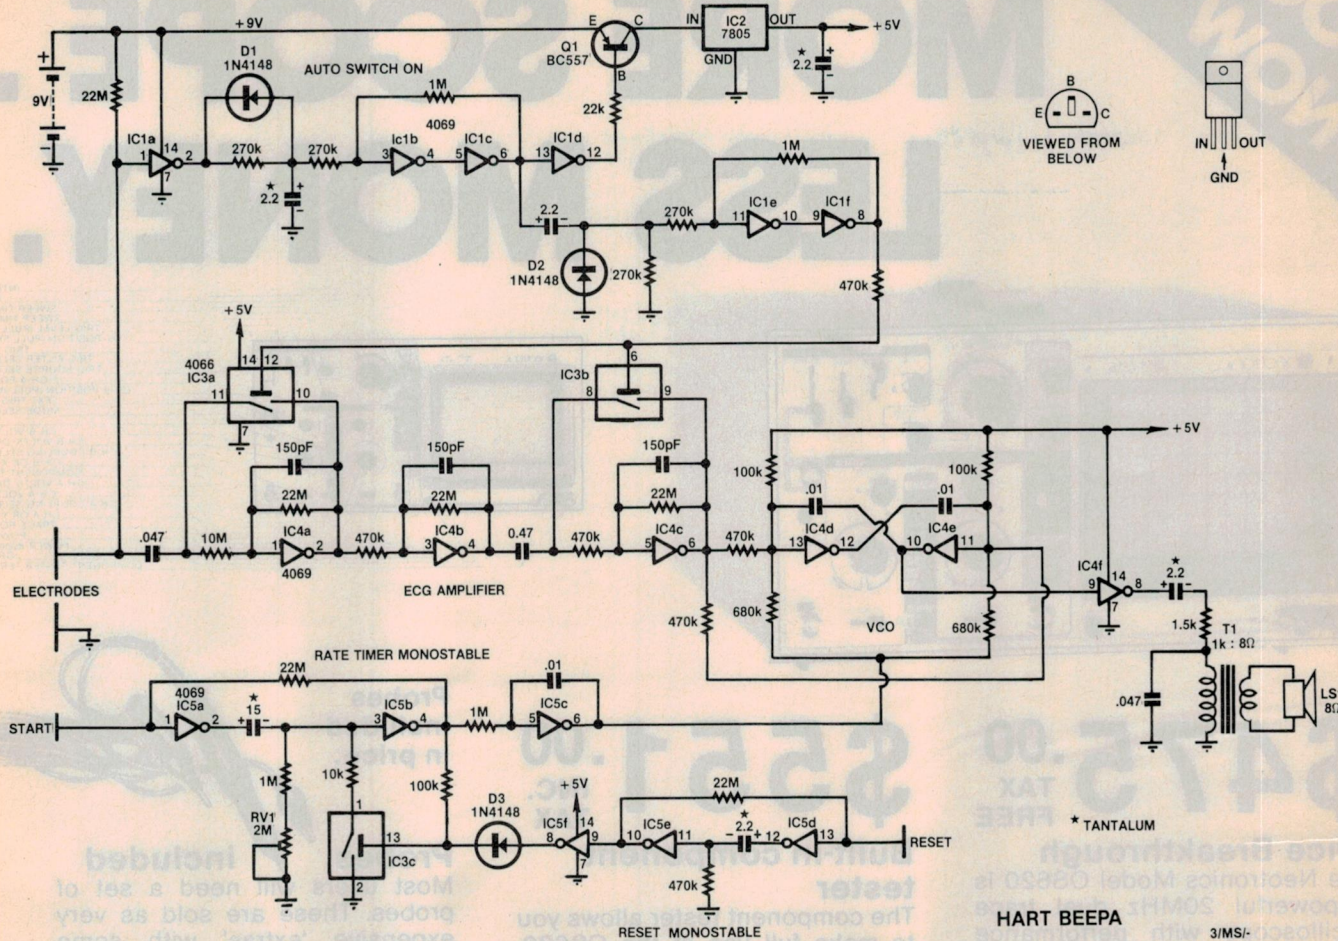

The circuit consists of an ECG amplifier, a VCO, a timer, and an automatic on/off switch.

that as a person becomes more relaxed (preferably in a comfortable position), then the heart rate becomes slower. Similarly, by consciously learning to lower the rate the state of relaxation may be increased.

This is where the *Hart Beepa* comes in — by simply listening to the rhythmic heart waveform while in a comfortable resting position, it is possible to learn to lower the rate and so produce an increased state of relaxation.

Actual rate readings may be taken from time to time if desired by operating

the timer as previously discussed. Measurement of heart rate before and after exercise is an established technique for determining fitness levels — especially in the time taken for the rate to return to the at rest level after exercise.

Apart from this “serious” application the *Hart Beepa* will find much use as an experimental and educational “technical toy”. Just passing it around a group of friends produces much fascination as the individual heart rhythms are made audible.

Circuit description

The circuit is built around standard CMOS ICs and may be broken down into four sections: an ECG amplifier, a voltage controlled oscillator (VCO), a rate timer, and an automatic on/off switch. We'll consider each section in turn.

ECG amplifier: This consists of three CMOS inverter stages (IC4a,b,c) connected as an AC amplifier with an overall gain of approximately 800. The bandwidth extends from 0.5Hz to 70Hz and the input impedance is 10MΩ.

High input impedance is essential for reliable ECG work and is readily obtainable with CMOS devices.

The average ECG signal, as measured between the palms of the hands, into a high impedance is around 1mV so that a signal of around 800mV is available at the output of the amplifier.

From the chest, signals of 3 — 5mV are common, depending on positioning and electrode spacing. With the electrode spacing on the *Hart Beepa*, approximately 2mV can be expected from the chest, thus producing about twice the frequency swing as when held

Where to buy the kit

The *Hart Beeper* can be purchased from Technicraft Electronics, 338 Katoomba St, Katoomba, NSW 2780. Phone (047) 82 3418.



Three versions are available:

- (1) A complete kit of parts, including full instructions and information leaflets but no battery. Price \$35.00 plus packing and postage. Order BP001.
- (2) As above but with fully assembled and tested circuit board. Price \$49.50 plus packing and postage. Order BP002.
- (3) Fully built and tested unit with heavy duty battery. Price \$59.50 plus packing and postage. Order BP003.

Packing and postage: Australia \$4.75; New Zealand \$7.50 (airmail).

IN STOCK NOW

MORE SCOPE . . LESS MONEY.

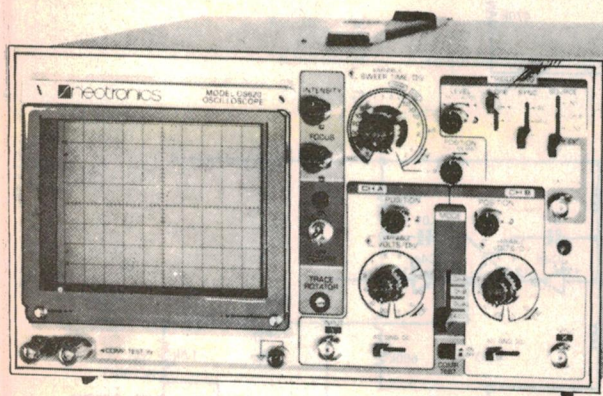

INTENSITY
FOCUS
SWEEP TIME DIV
SWEEP TIME VARI
TRIG LEVEL (PULL AUTO)
H POSITION (PULL 5X MAG)
TRIG SLOPE
TRIG SOURCE SELECTOR
CH-A POSITION
CH-B POSITION (PULL INVERT)
EXT TRIG INPUT
MODE SELECTOR
CAL
CH-B VOLTS DIV
CH-B VOLTS DIV VARI
CH-B COUPLING SELECTOR
CH-B OR X INPUT
COMPONENT TESTER
CH-A VOLTS DIV VARI
CH-A VOLTS DIV
CH-A COUPLING SELECTOR
CH-A OR Y INPUT
TRACE ROTATOR
POWER SW
POWER INDICATOR
GROUND
COMPONENT TESTER TERMINAL

\$475.00
TAX FREE

Price Breakthrough


The Neutronics Model OS620 is a powerful 20MHz dual trace oscilloscope with performance and features normally found on scopes costing \$200-\$500 more. We sell at lower profit margins and import directly from the manufacturer. You reap the benefit!!

\$551.00
INC. TAX

Built-in component tester

The component tester allows you to make full use of the OS620. With no additional test gear, you can check resistors, capacitors and zener diodes as well as trouble shoot solid state circuits. Testing signals are available via the COMP. TEST terminals.

Probes included in price.



Probes included

Most users will need a set of probes. These are sold as very expensive 'extras' with some other brands - often costing over \$60.00 a pair (we think this is a bit like selling a car and then saying it's extra for the tyres!). The Neutronics OS620 comes complete with a pair of high quality probes.

Compare the Features

The Neutronics OS620 is a precision measuring instrument. The tube is 150mm flat screen/internal graticule type with 2kV acceleration potential. The bandwidth is a full 20MHz on both channels. Others offer round faced tubes, plastic graticules, less bandwidth, yet cost more! Intensity modulation is built in.

Check these specs

- Vertical sensitivity: 5 mV/div to 20 V/div. 12 ranges
- Operating modes: ch-A, ch-B, dual, add, invert ch-B.
- Rise time: 17nsec
- Time base speed: 0.5μsec to 0.5s/div. 19 Ranges (plus 5X mag.)
- Trigger source: Int, ch-A, ch-B, line, ext and auto.
- Trigger coupling: AC, HF reject, TV line and TV frame.
- X-Y operation: Ch-A becomes Y axis, Ch-B becomes X axis.
- Trace rotation on front panel.

neutronics

FOR HIGH TECHNOLOGY ELECTRONICS

37 Ryedale Road
West Ryde NSW 2114
Australia. Telex AA 73264
Phone (02) 807 4739

**DELIVERED ANYWHERE
IN AUSTRALIA FOR \$7.50**



**BUY DIRECT
AND SAVE**

**Phone on the Hotline
(02) 807 4739**

Avoid disappointment. Order your OS620 by Bankcard or MasterCard on the phone. Just call up, reverse the charges and we'll take your order. Shipping is only \$7.50 anywhere in Australia - including packing and insurance.

Full 12 month warranty. Your OS620 is fully guaranteed for a full year.

Prices correct and goods expected in stock at time of going to press.

Hart Beepa

in the hands.

Because the circuit floats with respect to the mains, AC interference is not a problem as it is with equipment that is connected to the "outside world". Complex differential amplifiers, as used in mains operated equipment, are unnecessary for clean ECG signals and, as an added bonus, complete electrical safety is ensured.

The two CMOS bilateral switches (IC3a,b) are used to ensure fast baseline stabilisation of the amplifier after switch on. This is accomplished by holding the switches on for approximately 1 second after power up. This allows the .047 μ F and 0.47 μ F coupling capacitors to quickly charge to their operating potentials so that the amplifier can start operating almost immediately.

Without this feature the amplifier would remain off-scale for 10 seconds or more due to the long time constants and high gain necessary for ECG work.

Baseline stability during operation is enhanced by the use of electrodes which have a low DC offset potential. Many metals produce considerable DC potentials (100mV or more) when in contact with the skin (due to battery effect — skin oils, perspiration etc) and this would cause erratic baseline behaviour.

The electrodes supplied with the kitset have been specially plated to minimise this effect and produce reliable and repeatable results.

Voltage controlled oscillator: This is a conventional cross-coupled multivibrator using CMOS inverters IC4d and IC4e.

The frequency of oscillation is determined mainly by the inverter thresholds, the two .01 μ F capacitors and the two 100k Ω timing resistors.

Two more timing resistors, both of 470k Ω , are connected to the ECG amplifier output and allow modulation of the oscillator frequency by the ECG waveform. The two 680k Ω resistors set two distinct centre frequencies, depending upon the output of the rate timer monostable.

The exact frequency of operation is not all that critical and, with the timing constants chosen, the average centre frequency will be approximately 650Hz under normal operation, shifting up to approximately 880Hz during the timing period.

The output of the oscillator is buffered by IC4f and fed to a small loudspeaker via an RC network and a 1k Ω :8 Ω audio transformer. The 1.5k Ω resistor determines the volume and was chosen by experiment. Various transducer types (both piezo and moving coil) were tried but the speaker/transformer combination produced the most pleasant sound.

The .047 μ F capacitor across the transformer primary reduces the harmonic content to further smooth the output sound.

Rate timer: This again is built around CMOS inverters and comprises a negative edge triggered monostable (IC5a,b) with finger touch triggering made possible by a 22M Ω feedback resistor.

The timing period is determined by the inverter thresholds, the 15 μ F capacitor, RV1 and a 1M Ω resistor.

RV1 is a precision 15-turn cermet pot with a range of adjustment from

approximately 12 seconds to over 30 seconds. The timer is easily set up — all you need is your watch.

A 15 second period will generally be the most suitable for rate determination but, if you are after greater accuracy, the timer may be set to 20 or 30 seconds. Simply multiply by the correct factor to get the rate (x4 for 15s, x3 for 20s, or x2 for 30s).

A reset facility is provided by a similar (but shorter time period) touch triggered monostable (IC5d,e) for use in case of miscounts etc.


The CMOS bilateral switch (IC3) is used to quickly discharge the 15 μ F timing capacitor at the end of the timing cycle or when the reset circuit is operated. This allows immediate retriggering of the timer and prevents any inaccuracies which would occur if any charge were left on the timing capacitor at the start of a timing cycle.

An integrating network (1M Ω /.01 μ F) is used around IC5c to provide a "soft" shift in the oscillator frequency when the timer changes state (this is more pleasant to the ears than a sharp transition).


Automatic switch-on circuit: IC1a's input is normally held high by the 22M Ω resistor. When the body subsequently comes into contact with the electrodes, pin 1 is forced low and the pin 2 output goes high.

After a time interval determined by the following RC circuit, Schmitt trigger IC1b,c changes state and turns on Q1 via inverter stage IC1d. This supplies power to IC2 which provides a regulated +5V output for ICs 3, 4 and 5.

A second Schmitt trigger (IC1e,f) supplies power to the baseline stabiliser circuit (IC3) for approximately one

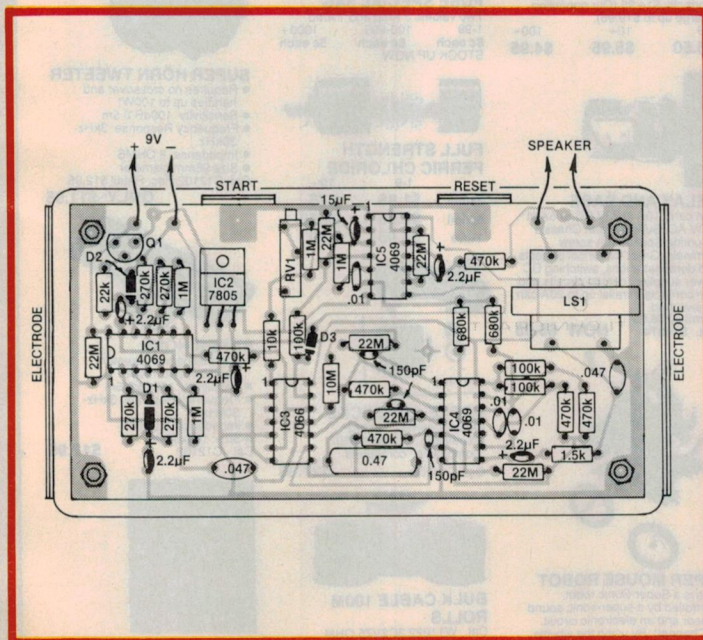

Parts layout diagram for the Hart Beepa.

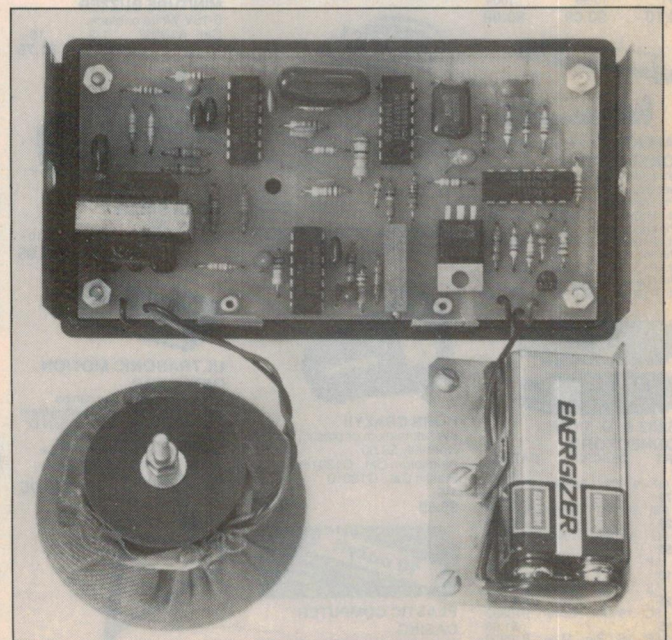

This view shows the fully-assembled PC board.

rie

Rod Irving Electronics

425 HIGH STREET,
NORTHCOTE VICTORIA.
PH: (03) 489 8866 489 8131
48-50 A'BECKETT STREET,
MELBOURNE VICTORIA.
PH: (03) 347 9251
Mail Order and
correspondence:
P.O. Box 235
NORTHCOTE 3070

MAIL ORDER
HOT LINE

(03) 481 1436



POSTAGE RATES

\$1-\$9.99	\$1.50
\$10-\$24.99	\$2.00
\$25-\$49.99	\$3.00
\$50-\$99.99	\$3.50
\$100-\$199	\$5.00
\$200-\$499	\$7.50
\$500 plus	\$10.00

Comet road freight is extra.




CENTRE RETURN JOYSTICK

Features 2x150K pots, long shaft
40mm with 25mm control ball.
Bonus adjustable offset feature on
pots.
Cat. X15637 1-9 10+
\$9.95 \$8.95



PRIME SPEC RED LEDS

We bought 100,000 so you can reap
the benefits!
Cat. Z10150 1-9 10-99 100+
\$0.10 \$0.09 \$0.08



CANNON TYPE AUDIO CONNECTIONS

We've sold 1000's because of their
great value!!
3 Pin line male 1-9 10+
Cat. P10960 \$1.90 \$1.80
3 Pin chassis male
Cat. P10962 \$1.90 \$1.80
3 Pin line female
Cat. P10964 \$2.50 \$2.10
3 Pin chassis female
Cat. P10966 \$2.90 \$2.20



RS232 & 'D' TYPE CONNECTORS

PART	DESCRIP.	CAT. NO.
1-9	DE 9P 9 Pin Female	P10380
\$1.75		
DE 9S 9 Pin Male	P10881	\$1.60
\$2.25		
DE 9C 9 Pin Cover	P10992	\$2.45
\$2.55		
DA 15P 15 Pin Male	P10894	\$2.10
\$2.10		
DA 15S 15 Pin Female	P10895	\$2.10
\$2.25		
DA 15C 15 Pin Cover	P10892	\$1.05
\$1.15		
DB 25P 25 Pin Male	P10900	\$2.80
\$2.95		
DB 25S 25 Pin Female	P10901	\$3.30
\$3.45		
DB 25C 25 Pin Cover	P10902	\$1.10
\$1.20		




BICYCLE COMPUTER

Fantastic 12 function, dual L.E.D.
Display, very popular in the USA
and now available at Rod Irving
Electronics

- FEATURES:
- 3 Speed functions:
 - Instantaneous Average speed and Maximum speed reached.
 - Distance travelled.
 - Target Distance (Perfect for training) with 1/4, 1/2, 3/4 bar graph display.
 - Pacer: Audio, 2 Speeds.
 - Clock/Stopwatch/Journey time
 - Calories used.
 - Miles or Kilometres.
 - Memory: Time, bodyweight, type, size, target size, target distance.
 - Friction free magnetic sensor.
 - Easily fitted, easy to detach for security.
 - 90 Day Warranty.

Cat. \$59.95



READY MADE CABLES

Serial to Serial
Cat. P19011 \$23.50
Parallel centronics to centronics.
Cat. P19013 \$34.50

TELECOMMUNICATIONS CABLE

2pr. Cat. W11302 \$0.75m
3pr. Cat. W11303 \$0.90m
10pr. Cat. W11310 \$1.95m



JUMPER LEADS

Set of 10 high quality leads approx.
450mm long. Normally \$4.95
Cat. W12000 NOW \$2.95



ECONOMY SWITCHES

Unbelievable Value!
1-9 10+
\$1.00 \$0.90 \$0.80
\$1.20 \$1.00 \$0.90



P.A. SPEAKERS

Low dual cone, wide range
200mm (8in.) Ideal for public
address, background music,
etc. Tremendous Value at these
prices!
Cat. C12000 1-9 10+
\$5.95 \$4.95

ECONOMY 19" RACK CASE

Cat. H10400 1-9 10+
\$34.95 \$29.50



HORN CRAZY!!

8W, aluminium or plastic,
Normally \$9.50
Aluminium Cat. C12015
Plastic Cat. C12010
1-9 10+
\$6.50 \$5.95



PLASTIC COMPUTER CASING

A stylish low profile case to give
your system the professional look it
deserves. Provision for two 5 1/4"
 slimline drives.
Cat. X11080 \$75.00

ALARM PRODUCTS!



LOCAL BURGLAR ALARM CONTROL PANEL

The odds against you are
climbing and prevention is better
than cure!

- Adjustable exit/entry time delay and alarm time (avoids unnecessary noise pollution)
- 12V D.C. 1.5Amp Provision for battery back-up.
- Tamper switch
- Optional outputs: Sirens, bells, floodlights, automatic diallers, tape recordings, closed circuit TV, etc.
- Accepts N.C. and N.O. detectors such as infrared, microwave, ultrasonic, wireless, vibration sensor, magnetic switch, door mat, smoke detector, glass breakage sensor panic button etc.

Cat. S15051 \$89.95



ULTRASONIC BURGLAR ALARM

- Easy to install
- Connect with magnetic switch, infrared detector, etc.
- Equip with hornspeaker, lockswitch, flashlight, closed circuit TV, etc.
- Rechargeable battery circuit with recharge indicator L.E.D.
- N.O. and N.C. circuit breakdown indicator
- Low dry battery indicator.

Cat. S15052 \$89.95



GLASS BREAKAGE DETECTOR


Adjustable for closed circuit or open
circuit type glass. Instructions
supplied.
Cat. S15060 \$3.95




4" BELL
12V D.C. 250mA
Cat. S51072 \$9.95



MINITURE BUZZER
5-15V White or black.
Cat. A15062 1-9 10+
\$1.95 \$1.75



HORN SIREN
12V DC, 8W
Cat. C12012 1-9 10+
\$14.95 \$13.95



ULTRASONIC MOTION DETECTOR

A compact design that can be
used with virtually any alarm system
which has an input for N.C. or N.O.
external sensor. Coverage is
approximately 110 degree angle
and up to 8 metres. Comes with
detailed instructions.
Cat. S15033 \$39.95



MOUNTING BRACKET

For above Ultrasonic Alarm and
features ball pivot for horizontal and
vertical adjustment.
Cat. S15042 \$11.95



RECHARGEABLE 12V GELL BATTERIES

Leakproof and in 3 convenient
sizes, these long service life
batteries are ideal for burglar
systems, emergency lighting or as a
computer backup power supply.
Ideal for many power needs.


Cat. S15029 12V 1.2 AH \$17.95
Cat. S15031 12V 2.6 AH \$34.50
Cat. S15031 12V 4.5 AH \$44.95



NICAD BATTERIES

Save on carbon batteries with these
Apollon Nickel cadmiums.
Rechargeable up to 1000 times!

1-9	10+
Cat. S15020	AA500 MA
\$2.45	\$2.25
Cat. S15021	C1.8 AH
\$4.95	\$3.95
Cat. S15022	D4 AH
\$7.95	\$6.95



ELECTRONIC CASSETTE DEMAGNETISER


Save \$2. Rec. retail \$19.95
Cat. A1006 NOW \$17.95



NEW JOINABLE PCB MOUNTING SCREW TERMINALS

Less than half the price of the old ones!
2 Way 1-9 10+
Cat. P10542 \$0.50 \$0.40

3 Way
Cat. P10543 \$0.75 \$0.65
(please note these are the new blue ones)



SOLDER CENTRONICS PLUGS

Unreal price for absolute top quality.
Normally \$14.95 (Our opposition
charge up to \$19.95).

1-9	10+	100+
\$6.50	\$5.95	\$4.95




RELAY AND BASE

Can carry 10A at 28V DC or 5A at
240V AC. Supplies with Chassis
Mounting Socket with screw
terminals. Great for school projects
and demonstrations, switching DC
power supplies, central circuits and
with contacts parallel up to 20A can
be switched.
Normally \$8.95
Cat. S14074 NOW \$6.95



PIPER MOUSE ROBOT

This is a Super-Sonic robot,
controlled by a super-sonic sound
sensor and an electronic circuit.
(1 Channel). By using the whistle
included with this Kit, Piper Mouse
will obey your commands
immediately turning to the left, stop,
turning to the right, stop, advance
and stop.
Cat. K96680 \$34.95




36 WAY CENTRONICS CRIMP PLUG

Cat. P12200
1-9 10-99 100+
\$6.50 \$5.95 \$5.50



LOGIC PROBE 3800A

Features 20MHz memory TTL/
CMOS operation. Normally \$29.50
Cat. Q11272
1-9 10+
\$19.50 \$17.50



INCREASE YOUR MEMORY

	1-9	10+
4116	\$1.80	\$1.70
4164	\$4.95	\$4.50
2716	\$6.25	\$5.95
2732	\$6.25	\$5.95
2764	\$8.25	\$7.95
27128	\$19.50	\$18.75
6116	\$6.95	\$6.75
41256	\$24.95	\$23.95


BULK 'IC' SPECIALS

	10+	100+	1000+
LM324	\$0.70	\$0.65	\$0.60
LM339	\$0.70	\$0.65	\$0.60
LM555	\$0.40	\$0.39	\$0.35
LM723	\$0.60	\$0.55	\$0.53
LM741	\$0.45	\$0.40	\$0.37
LM1458	\$0.80	\$0.70	\$0.65
LM1488	\$0.60	\$0.57	\$0.55
LM1489	\$0.60	\$0.57	\$0.55




IC SOCKETS (LOW PROFILE) How cheap can they go??

	1+	10+	100+	1000+
8 Pin Cat.				
15c	14c	12c	09c	
14 Pin Cat.				
16c	15c	14c	10c	
16 Pin Cat.				
17c	16c	15c	11c	
18 Pin Cat.				
18c	17c	16c	13c	
20 Pin Cat.				
29c	28c	27c	26c	
24 Pin Cat.				
35c	33c	32c	28c	
40 Pin Cat.				
45c	40c	35c	30c	




FUSE SPECIAL 3AG

Two values, 3 Amp and 1 Amp
1-99 100-999 1000+
8c each 5c each 5c each




FULL STRENGTH FERRIC CHLORIDE

	1-9	10+
250ml	\$1.95	1.75
500ml	\$2.95	\$2.50
1 litre	\$4.95	4.50



APPLE JOYSTICKS

Ideal for games or word
processing. Fits most 6502
"compatible" computers.
Cat. C14200 \$27.95



BULK CABLE 100M ROLLS


Cat. W11222 3C2V75 OHM	\$22.00
Cat. W11224 5C2V75 OHM	\$35.00
Cat. W11219 4 Core Shielded	\$49.00



VERBATIM DISKS

"Lowest" price possible for
"Highest" quality.

	1-9	10+
MD525-01	Boxes 29.50	Boxes 27.50
MD550-01	Boxes 39.50	Boxes 37.50



NEW SLOPING CASES

Plastic with metal front panel,
available in two sizes.

Cat. H10450 190x120mm \$9.95
Cat. H10455 256x185mm \$17.95
(measurements are approx. only)



NATIONAL RECHARGEABLE DRILL/SCREW DRIVER

EZ505
• Quick 1 Hr Charging
• 4 Stage Torque Control
• 2 Speed switch
• Handle Storage Compartment
• Forward/Reverse Operation
• National Quality
• Spare Battery Pack Available
Cat. T12320 \$149.00



WE HAVE DONE IT AGAIN!!

New multimeter at unbeatable
value for under \$45! The new
YU-FONG YFE-1030C features:

- Large 3 1/2 digit display. (1/2 inch high)
- Autopolarity, "-" display for Negative input.
- High over-load protection for all ranges.
- Over-load display highest figure "1" or "-1" alone glows.
- Power consumption 20mW approx.

Cat. \$44.95



SUPER HORN TWEETER

- Requires no crossover and handles up to 100W!
- Sensitivity: 100dB/0.5m
- Frequency Response: 3kHz-30kHz
- Impedance: 8 OHMS
- Size: 96mm diameter

Cat. C12102 Rec. Retail \$12.95



SUPER HORN

- Wide dispersion tweeter, handles up to 100W.
- Sensitivity: 105dB/0.5m
- Frequency Response: 3kHz-30kHz
- Impedance: 8 OHMS
- Size: 145x54mm

Cat. C12102 \$12.95



HEX KEY PAD

19 keys, unencoded, 76 x 95mm
Cat. K46804 \$42.50

Errors and Omissions Excepted.

Hart Beepa

second after switch on.

Operating current for the whole circuit is approximately 4.5mA. Any grade of battery will give long life but, for most reliable service and long shelf life, an alkaline type is highly recommended.

Construction

The unit is built into a moulded plastic case measuring 65 x 120 x 40mm. This case features an attractive front panel with screened lettering, and will be supplied ready drilled.

All components are mounted on a printed circuit board which is fastened to the lid of the case. The two wraparound electrodes connect to the board via the mounting screws. The metal touch switch tabs for the timer are supplied rivetted and soldered to the board.

Fit the resistors to the PC board first, followed by the capacitors, the 15-turn potentiometer, the transformer and the semiconductors. Note carefully the orientation of the tantalum capacitors and the semiconductors.

After assembly and checking, solder the battery clip leads to the PC board and connect the loudspeaker. The speaker is mounted using a fibre disc and screw "pedestal". The disc is attached to the magnet using double-sided adhesive tape and the screw located through a hole in the board.

A small piece of red cloth is used for the speaker grille. This is simply stretched over the face of the speaker and fastened by a rubber band around the magnet.

Mechanical assembly

No great mechanical ability is required here.


First, attach the electrodes to the base with the countersunk screws, fasten with four nuts from the top and tighten firmly. The PC board is now placed over the screw threads, so that it rests on the nuts, and then fastened with another four nuts on the component side.

Tighten the nuts firmly with a nut-driver, then screw the two ¼-inch threaded spacers onto the remaining threads of the left side mounting screws (away from the speaker transformer). The battery holder can now be mounted on the spacers using the two short round-head screws supplied.

Testing

Fit a 9V battery and connect the electrodes together using a clip lead. If all is well you should hear a tone in the speaker.

Now, using another clip lead,

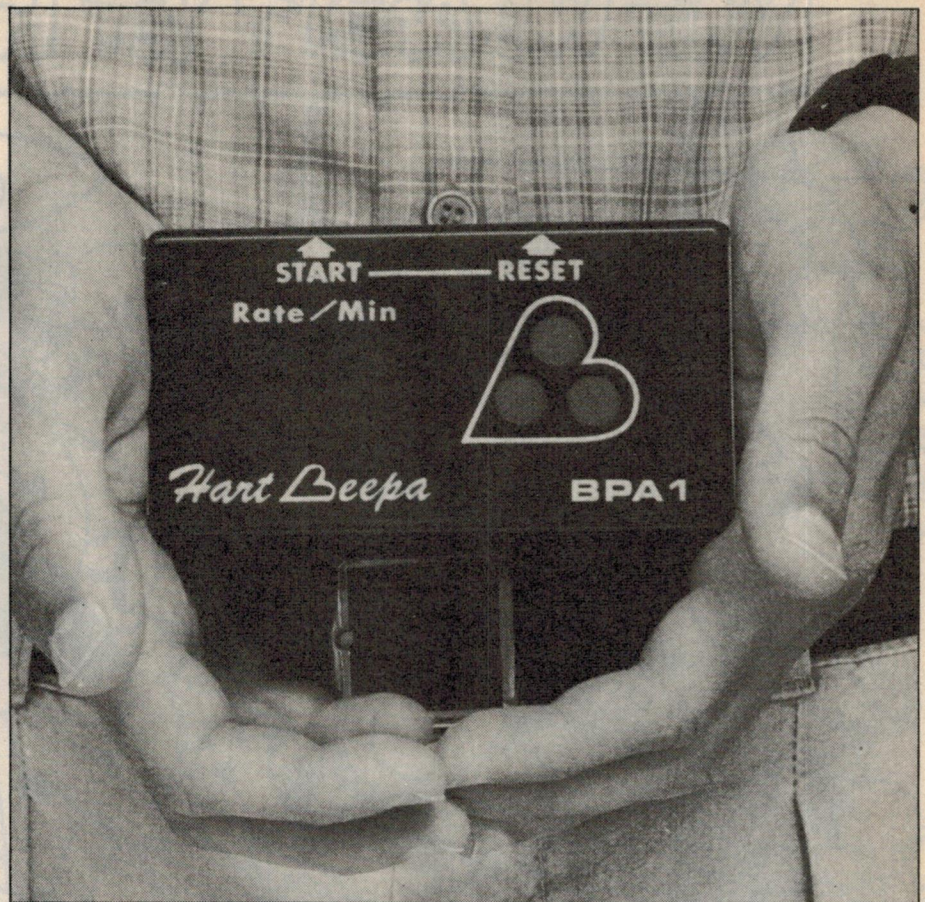

The Hart Beepa is held between the hands as shown in this photograph. Heart beats are heard as a slight shift in the audio tone.

momentarily short the timer start button to the electrodes. The tone should immediately shift to a higher pitch.


Assuming that the circuit works correctly, use your watch (or a stopwatch) to check the duration of the higher tone. Turning RV1 clockwise will increase the

time while turning RV1 anticlockwise will reduce the timing period. Adjust RV1 for either 15, 20 or 30 seconds.

Finally, the case can be assembled and the two end screws fitted to secure everything in position. The Hart Beepa is now ready for use.


NOTE

The name *Hart Beepa* and the printed circuit board copyright are the property of Technicraft Electronics, 338 Katoomba St, Katoomba, NSW 2780.

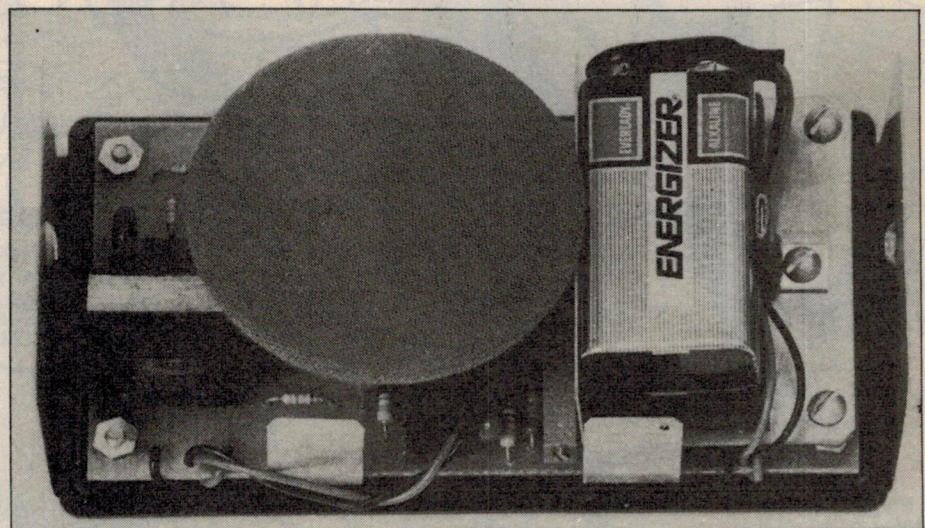


This internal view shows the loudspeaker and battery holder mounted in position.

Why We Aren't Yet Finished...

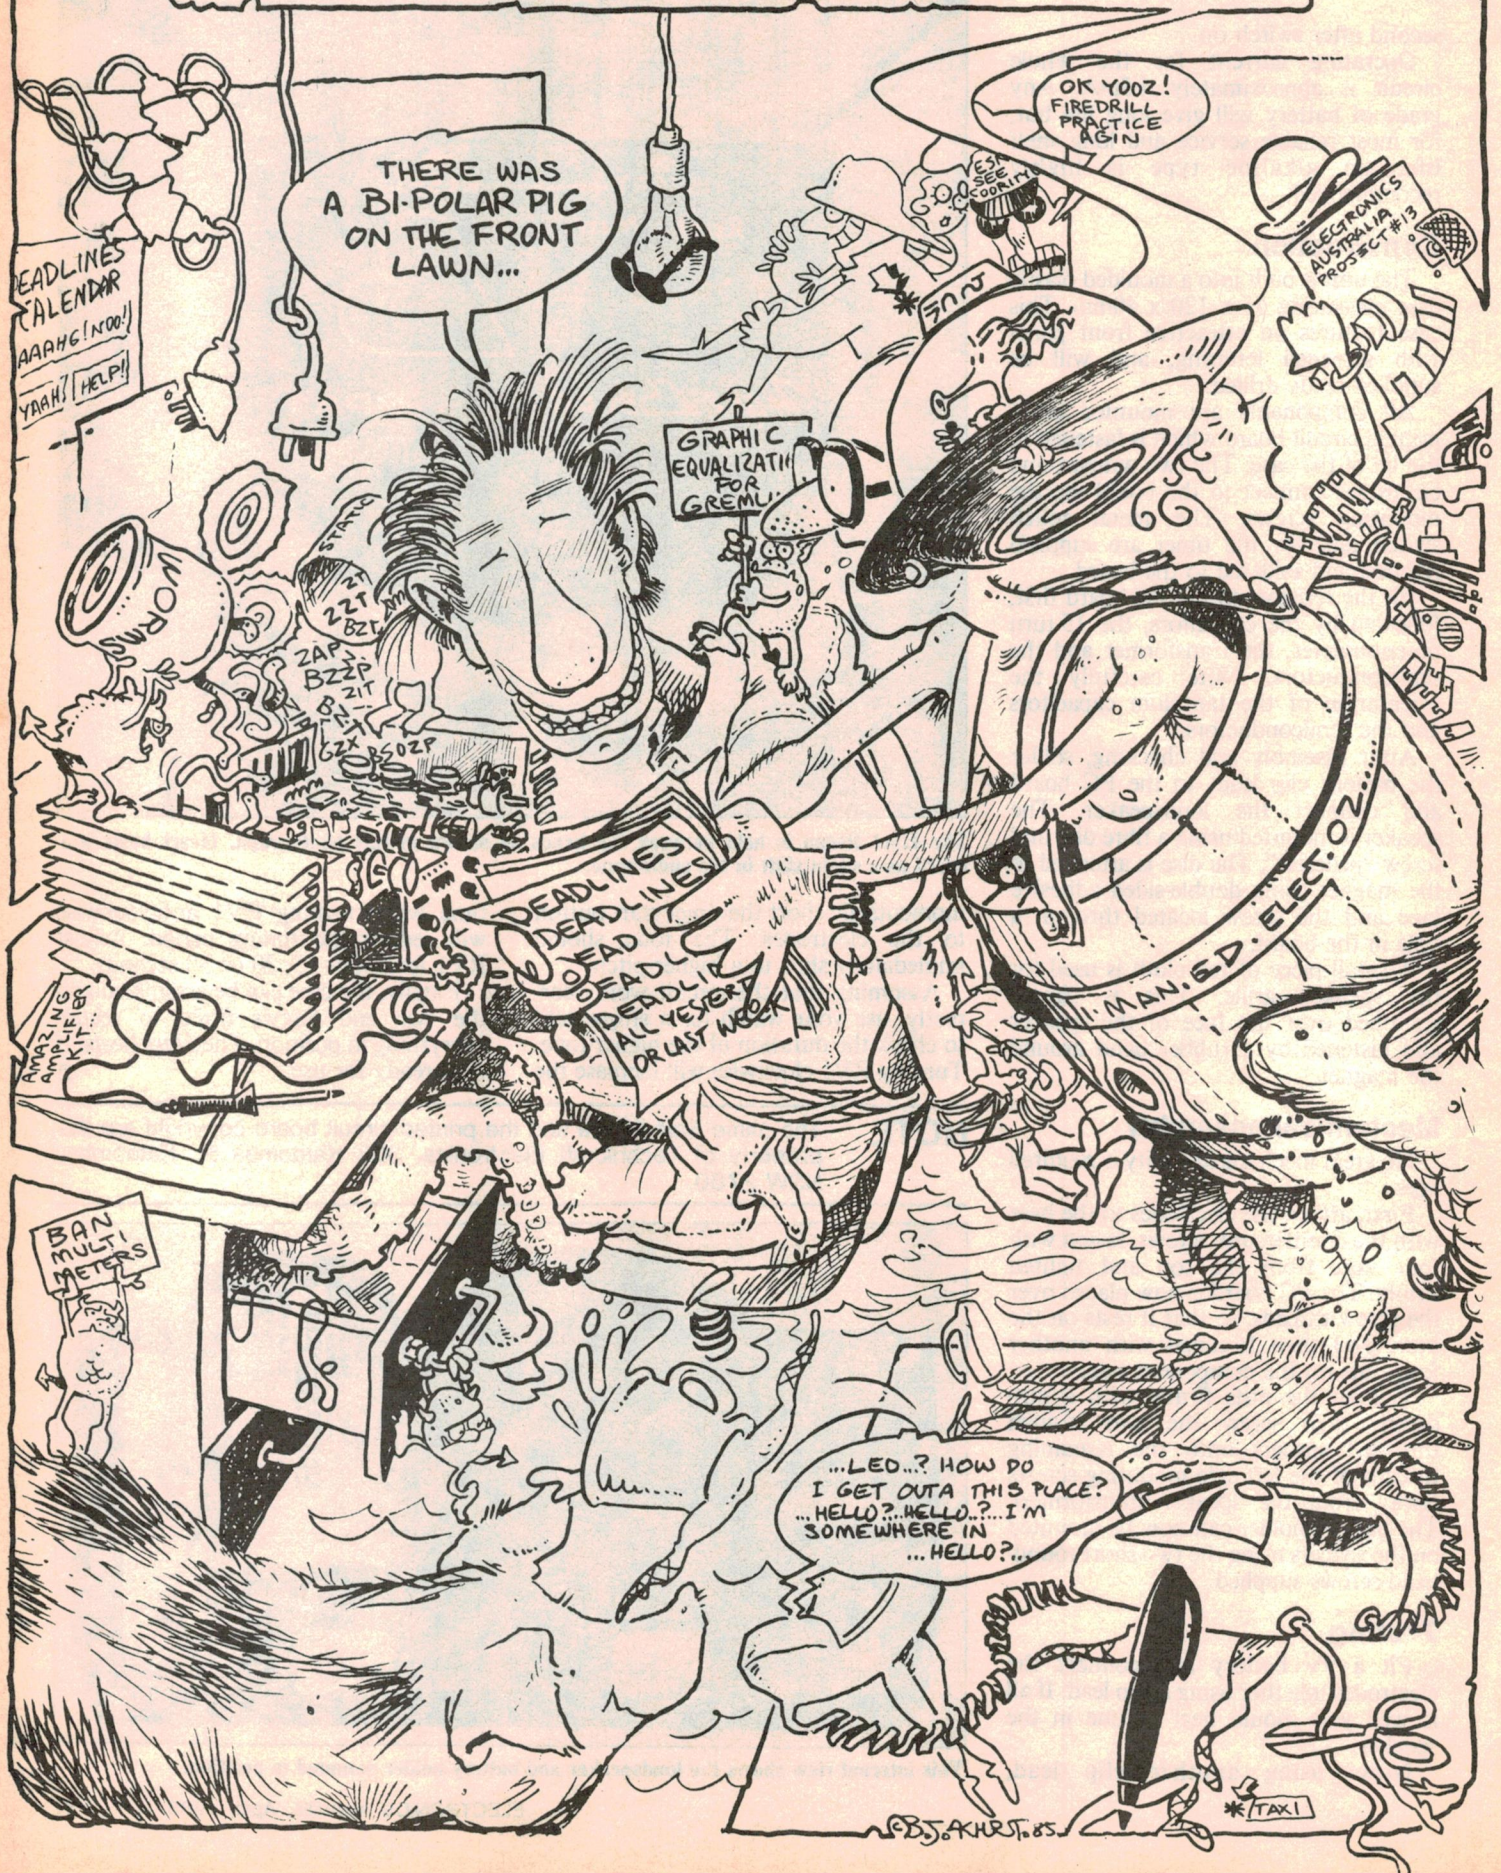

Playmaster Series 200 amplifier

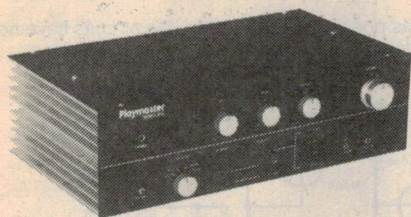

Yaaarrgh!!! It's not in here. *Electronics Australia* has tripped up again. The third article on the Playmaster Series 200 has had to be held over. Readers are up in arms all over the country. Why?

As the illustration on the opposite page indicates, we have had some problems with the mighty Playmaster Series 200 amplifier which have prevented us from bringing you the third article on construction. Not to put too fine a point on it, the phono inputs have been the problem. Because the phono inputs are physically close to the transformer, hum was being induced into them. This was in spite of the fact that the transformer is a low flux-leakage toroidal type which we enclosed in a metal box.

Loud rectifier buzz radiated from the transformer was being induced into the signal loop formed when a cartridge is connected to the inputs.

The problem was exacerbated by the additional gain and circuit components required for the moving coil mode. If we judged the phono inputs in moving magnet mode to be unacceptable (and we did), it was horrendous for the moving coil mode.

We had been battling with this dilemma for several months and have now fully resolved it. The reason it has taken so long to resolve the problem has been that we were reluctant to downgrade the performance parameters in any way. And we have not. Unfortunately, the solution was arrived at too late to present the third article.

Briefly, we have had to modify the circuit layout for the phono preamplifier and, unfortunately, omit the circuit components for the moving coil circuitry. In fact, we have had to construct an entirely new prototype amplifier to fully prove the design. We will bring you the details next month in the constructional article. Promise! Really, we will!

We apologise to readers and our advertisers for any inconvenience. It will be well worth the wait.

Electronics is going digital.

This book can help YOU go right along with it:

Electronic equipment now plays an important role in almost every field of human endeavour and every day, more and more electronic equipment is "going digital".


Even professional engineers and technicians find it hard to keep pace. In order to understand new developments, you need a good grounding in basic digital concepts, and *An Introduction to Digital Electronics* can give you that grounding. Tens of thousands of people — engineers, technicians, students and hobbyists — have used the previous editions of this book to find out what the digital revolution is all about.

The new fourth edition has been updated and expanded, to make it of even greater value.

You don't need any previous knowledge of digital electronics — the book starts you right from scratch, and covers all the basic concepts you need.

PRICE \$4.50

Available from "Electronics Australia", 140 Joynton Avenue, Waterloo, Sydney, 2017, **PRICE \$4.50**. Or by mail order: Send cheque to "Electronics Australia", PO Box 227, Waterloo, 2017, **PRICE \$5.40**.

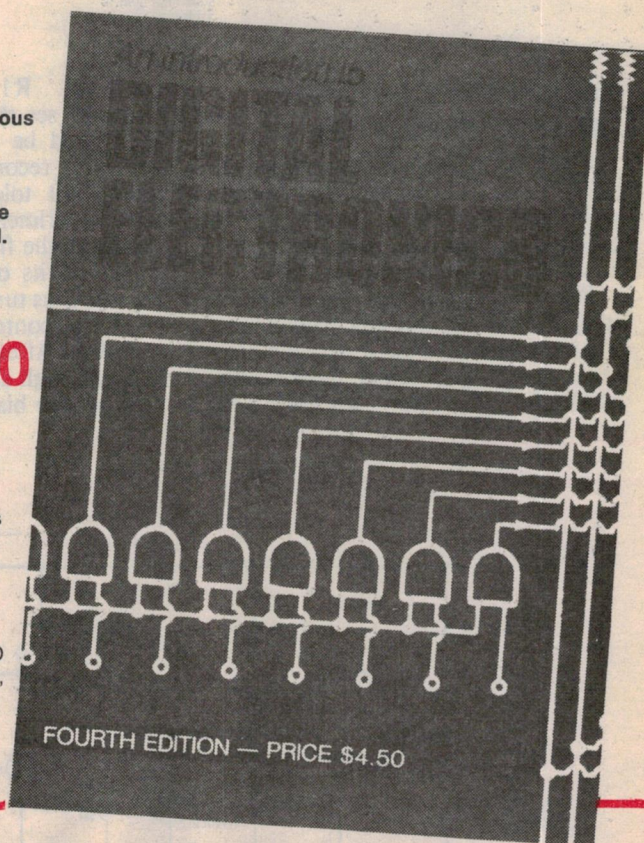


Here are the chapter headings:

- | | |
|--------------------------------|-----------------------------|
| 1. Signals, circuits and logic | 12. Basic readout devices |
| 2. Basic logic elements | 13. Multiplexing |
| 3. Logic circuit "families" | 14. Binary arithmetic |
| 4. Logic convention and laws | 15. Arithmetic circuits |
| 5. Logic design: theory | 16. Timing & Control |
| 6. Logic design: practice | 17. Memory: RAMS |
| 7. Numbers, data & codes | 18. ROMs & PROMs |
| 8. The flipflop family | 19. CCDs & magnetic bubbles |
| 9. Flipflops in registers | 20. D-to-A Converters |
| 10. Flipflops in counters | 21. A-to-D Converters |
| 11. Encoding and decoding | Glossary of terms, Index |

Circuit & Design Ideas

Interesting circuit ideas from readers and technical literature. While this material has been checked as far as possible for feasibility, the circuits have not been built and tested by us. As a consequence, we cannot accept responsibility, enter into correspondence or provide constructional details.

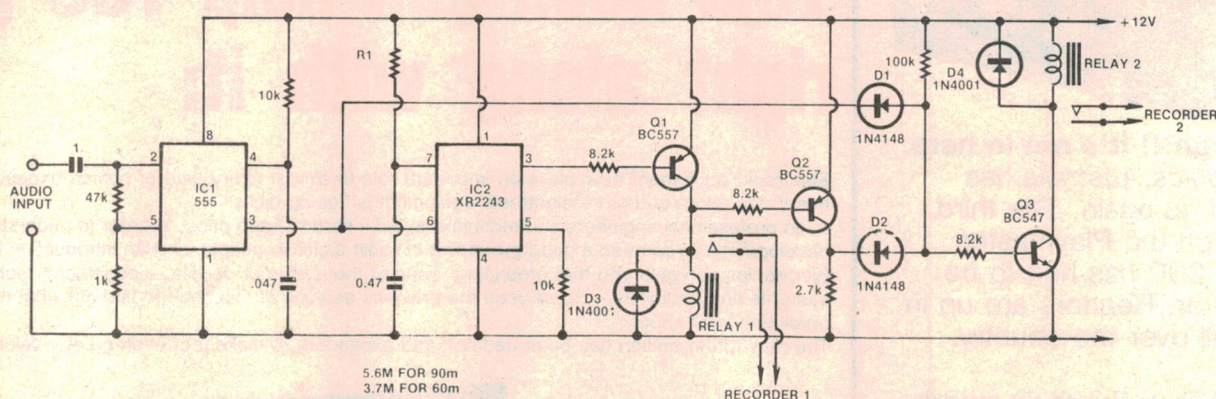

Sequential controller for tape recorders

Up to 90 minutes of recording can be performed automatically using this sequential switch to control two cassette recorders. It is activated by an audio signal from a clock radio.

IC1 (a 555) operates as an audio trigger, with pin 3 going high when the input signal to pin 2 exceeds 1V. Once pin 3 goes high, monostable oscillator IC2 (an XR2243) is

triggered. R1 and the 0.47μF capacitor set the monostable period. R1 should be around 5.6MΩ for a 90-minute recording period, although component tolerances may call for some experimentation.


During the first half cycle of IC2's operation, its output (pin 3) will be low. Q1 thus turns on and drives relay RLY 1 to control one of the cassette recorders. After 45 minutes, pin 3 of IC2 goes high and Q2 turns on. D2 is now reverse biased and Q3 turns on

to activate RLY 2.

Diodes D1 and D2 form an AND gate. These work in conjunction with Q2 to ensure that Q3 remains off prior to the initial audio signal and during the first half cycle of IC2. When Q1 is on, Q2 is off and the base of Q3 is pulled low via D2 and the 2.7kΩ resistor. Similarly, when pin 3 of IC1 is low, Q3 is held off by D1.

I. Davies
Cheltenham, Vic.

\$20

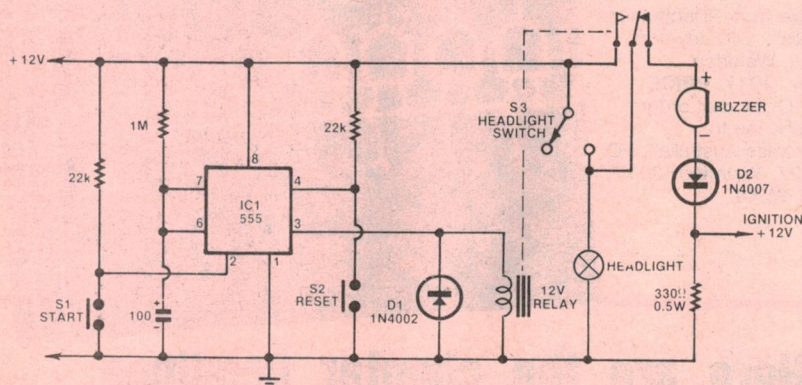

Headlight control circuit

This circuit incorporates both a headlight reminder and a delay circuit. The reminder circuit is quite standard. Connected between the ignition and headlight switches, it operates a buzzer if the headlights are left on when the ignition is switched off. It is, however, disabled when the delay is activated.

A 555 timer IC is used to provide a

preset period of headlight operation when the ignition is switched off. Configured as a bistable oscillator, the 555 controls a relay for the duration of the delay once the "Start" switch has been pressed.

The duration of the cycle is determined by the setting of the 1MΩ potentiometer and can be varied over the range one to 120 seconds. This provides a delay during which the driver can exit from the car and lock the garage or

negotiate the garden path. The cycle can be terminated at any time by pushing the reset switch.

P. Howarth,
Gunnedah, NSW

\$20


Program for RS232 printer interface

This corrected version of the program used for the RS232 Printer Interface published in EA, February '81 can be used with the Super 80 computer. It can also be used with other machines having 16K of RAM when interfaced to 300 baud printers.

The error occurred in line 19 (:FOR I = 1 TO BR:READ D:NEXT I). The NEXT I should be at line 24. The program has also been shortened to facilitate the compatibility with 16K computers.

CLS

```
1 ' brother EP-44 Printer Program for
  SYSTEM 80
2 ' Modified & Errated by R. De La
  Torre
```

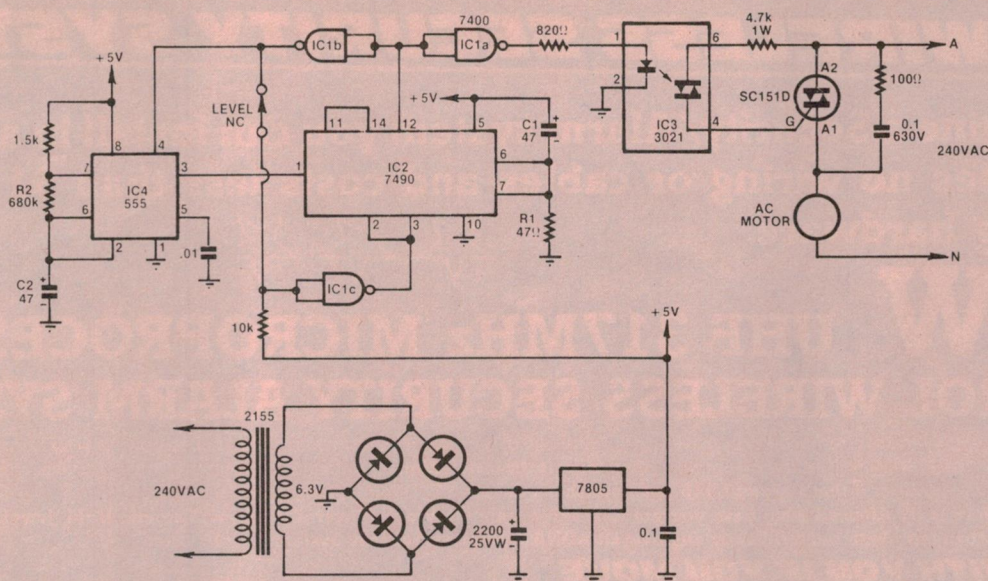Cistern pump timer

This circuit was devised as a demonstration unit for toilet cisterns. The pump operates when pin 12 of IC2 is low. This causes the output of inverter IC1a to be high which operates the optocoupler IC3 to turn on the Triac.

At switch-on, the combination of R1

and C1 cause the 7490 decade counter to set to BCD 9 (1001). This means that pin 12 will be high and the Triac will be off. The output of IC1b will also be low which disables the 555, IC4. If the water level switch is open (ie, tank full), the output of IC1c is low and the 7490 is not reset and the circuit remains in this condition.

When the water level switch closes,

IC1c will reset IC2 which causes pin 12 to go low and turn on the Triac. This also enables the 555 which delivers pulses to the 7490. This then counts up the pulses until pin 12 again goes high, turning off the pump. With the values shown for R2 and C2, the pump cycle time is about seven minutes.

D. Anderson,
Penguin, Tas.

\$15

```

3 POKE 16396, 23
6 POKE 16553, 255:MS = 32641
7 POKE 16422, 129:POKE16423,
127
9 FOR I=0 TO 123: READ
D:POKE MS+I, D:NEXT I
19 FOR I=1 TO 3:READ D
20 DH = INT(D/256):DL =
D-256*DH
21 POKE MS+42, DL:POKE
MS+43, DH
22 POKE MS+84, DL:POKE
MS+85, DH
23 POKE MS+94, DL:POKE
MS+95, DH
24 NEXT I
30 POKE 32701, 50:CLS:END
31 DATA 243, 62, 255, 211, 254, 229,
33, 255, 1, 43, 62, 4, 211, 255, 124
32 DATA 181, 32, 247, 225, 121, 254,
13, 40, 3, 254, 32, 216, 245, 229,
197
33 DATA 6, 9, 55, 245, 245, 33, 5,
252, 205, 33, 2, 33, 222, 0, 43, 124,
181
34 DATA 32, 251, 241, 31, 245, 48,
19, 33, 4, 252, 24, 19, 14, 2, 175,
13
35 DATA 40, 2, 24, 219, 62, 10, 24,
215, 24, 47, 198, 0, 33, 5, 252, 205

```

```

36 DATA 33, 2, 0, 0, 33, 222, 0, 43,
124, 181, 32, 251, 16, 212, 17, 222,
0
37 DATA 203, 74, 40, 11, 33, 4, 252,
205, 33, 2, 27, 122, 179, 32, 251,
241
38 DATA 241, 254, 13, 40, 198, 183,
40, 197, 193, 225, 241, 201, 615
39 DATA 450, 222, 146, 108, 51, 23,
8, 1
40 ' For EP-44 responses :-
41 ' BAUD RATE — 300
42 ' BIT LENGTH — 7
43 ' PARITY — Z
44 ' NEWLINE — CR + LF (NOTE
TO HAVE LISTINGS WITH 2
LINE
45 ' SPACES BETWEEN LINES
THEN NEWLINE — CR only)
46 ' CODE — 7 BIT
47 ' ER — N
48 ' THIS PROGRAM SHOULD
WORK ON ANY RS-232C
PRINTERS WITH
49 ' 300 BAUD
50 ' WITH THE CIRCUIT IN EA
February 1981

```

R.De La Torre,
Adamstown, NSW.

\$20

DIGITAL ELECTRONICS

Electronic equipment now plays an important role in almost every field of human endeavour. And every day, more and more electronic equipment is "going digital". Even professional engineers and technicians find it hard to keep pace. In order to understand new developments, you need a good grounding in basic digital concepts, and *An Introduction to Digital Electronics* can give you that grounding. Tens of thousands of people — engineers, technicians, students and hobbyists — have used the previous editions of this book to find out what the digital revolution is all about. The fourth edition has been updated and expanded, to make it of even greater value.

Available from "Electronics Australia", 140 Joynton Avenue, Waterloo, Sydney, 2017, **PRICE \$4.50**. Or by mail order: Send cheque to "Electronics Australia", PO Box 227, Waterloo, 2017, **PRICE \$5.40**.

GREAT NEW PRODUCTS FOR UHF WIRELESS SECURITY SYSTEM

Just imagine a Security/Alarm system you can install in about an hour - uses no wiring or cables and costs less than \$1 for the mounting hardware.



NEW UHF 317MHz MICROPROCESSOR CONTROL WIRELESS SECURITY ALARM SYSTEM

Commercial grade, quality alarm systems are expensive - just phone one of the "Name" security firms and get a quote for your home - our estimate is that it will be anything up to \$1000 just for the equipment - **then there is the installation** - countless holes punched through walls, miles of wiring and a day or two of installers labour and **that's around \$25 per hour these days.**

Hardly worth the effort, is it? After all what have you got to lose? - only the Video Player, CD Player, Camera, Hi Fi, Jewellery and so on!! Well all that is now changed - with our brilliantly engineered BONAX Wireless Security System - Read on -

TAKE IT WITH YOU IF YOU MOVE

Apart from the flawless operation of the BONAX system - one of the great features is its application with rented or leased premises - lets face it, money spent on installing a wired system in your Home or Office, Factory, etc. is irrevocably lost when you move on. With the Bonax you simply take it with you.

This alarm system is a brand new innovative design that features completely wireless connection to all accessories, even the reed switches. It is the most professional security system we've ever appraised. Think of how easy it is to install a 'Wireless' alarm system. The benefits are endless. e.g. arming your Flat or Townhouses with an alarm you don't need to run wires through the roof or drill great holes through the walls. When moving house the alarm is simple to dismantle and re-install elsewhere.

The system divides protected areas into four different zones, programmable by DIP switches in each transmitter/detector. **Pocket remote control** can simply arm or disarm any zone i.e. alarm your house perimeter from your bedside when retiring etc. this allows essential protection in some zones while cancelling other zones as desired. Each transmitter/detector unit can be programmed into interior or perimeter zone. Zones can be programmed for instant or delayed trip. The system has a built-in ear piercing siren for intrusion and panic alarm signals. It also has another dry relay output with normally closed, normally open contacts for connecting to other alarm reporting devices such as telephone dialler, additional outdoor siren etc.

SYSTEM COMPRISED OF: 4-ZONE MAIN CONTROL RECEIVER

Cat. LA-5400

\$299.00

FEATURES:

- Wireless reception of external or internal sensors or detectors.
- Selectable home or away modes for selecting internal and external arming of just external to allow movement inside the building.
- Built-in Piezo electric siren gives different signals to indicate different functions.
- N.O. + N.C. contacts
- Sends signal down power line to activate one or more remote sirens.

The main control receiver runs on 250V AC with a 12V 1.2AH battery for emergency backup. All other units with the exception of the line carrier, run on a 9V battery each. The average life expectancy is approximately one year. System works around the 317MHz frequency where there is less chance of false alarm. The range of the unit is nominally 80 metres in open space.

ALARM AND INDICATION SOUNDS

Intrusion Alarm - Panic Alarm - Arm Tone - Disarm Tone - Exit Click Tone - Monitor Tone - Tampering Alarm.

DETECTOR/TRANSMITTER UNIT (REED SWITCH)

Cat. LA-5408

\$39.50

Suitable for Windows and Doors

This consists of an enclosed reed switch and compact UHF transmitter and a removable enclosed magnet. The unit is at rest when magnet and reed are side by side (within 25mm or 1 inch). When the magnet is moved away more than approximately 1 inch the alarm signals to the Main Control Receiver and the alarm is sounded. In practise the Reed/Transmitter is mounted on the door or window frame with the magnet on the moving door or window.

PASSIVE INFRA RED MOVEMENT DETECTOR

Cat. LA-5402

\$99.00

Ideal for the lounge room, family room or hallways e.g. anywhere where an intruder is likely to pass through. Mounts up on the wall or on top of bookshelves etc. Detects movement within an area of 9 metres by 9 metres by sensing intruder body heat movement through the protected area. Will not false trigger with the family cat or curtain movement etc. - as is the case with the cheaper Ultrasonic alarms.

REMOTE PIEZO SIREN

Cat. LA-5404

\$89.00

This unit is an optional line carrier receiver. Receives signal through 'AC' line i.e. it would ideally be located in, say, the roof space and plugged into mains power.

HAND HELD CONTROL TRANSMITTER UNIT

Cat. LA-5406

\$39.50

A real joy to use - keep it at the bedside table - allows you to say, alarm the house perimeters when retiring or you can take it with you when you go out, arming your system after you lock the door. Unit is a function control transmitter - to send four different signals.
OFF - To disarm the system before entering. **Home** - To instantly arm the system with 'perimeter' detection only. **Away** - To arm complete system after a given exit delay time of about 40 sec. **Panic** - To start an emergency signal whenever needed, in any mode.

WILL IT INTERFERE WITH MY NEXT DOOR NEIGHBOUR IF HE ALSO INSTALLS A BONAX?

Fortunately no - each system is custom coded by the owner when commissioned. The chances of him programming the same code are non-existent - in fact it is quite feasible to have a whole apartment block fitted out with an individual Bonax System in each apartment.




COMPLETE SYSTEM \$599

Cat. LA-5410


TO SUIT AVERAGE HOME

Package consisting of:


- | | |
|-------------------------------|-------------|
| 1 x LA-5400 | Master |
| 2 x LA-5408 | Reeds |
| 1 x LA-5402 | Passive IRD |
| 1 x LA-5404 | Siren |
| 1 x LA-5406 | Remote |
| One complete set of Batteries | |




LA-5406




LA-5402



LA-5408



LA-5400



LA-5404

'85 - FROM JAYCAR

AVTEK MULTIMODEMS

State-of-the-art multimodem - has the following data standards CCITT V.21 & V.23, BELL 103 & 202 - Data rates 300, 600 & 1200 BPS - Backward channel 75 BPS in conjunction with 1200 BPS - Computer interface CCITT V.24 (RS232C) - Power requirements 240V AC 3 watts. Talk to the world with this fine Multimodem.
Cat. XC-4820


INCLUDES PHONE

\$349.00

MiniModem

★ 300 Baud full duplex ★ Answer/originate ★ Plugs straight in (hardware phone) ★ Superior VLSI chip performance (identical to Multimodem) ★ Telecom approval C84/37/1173.
Cat. XC-4825

ONLY \$199.00
INCLUDES PHONE

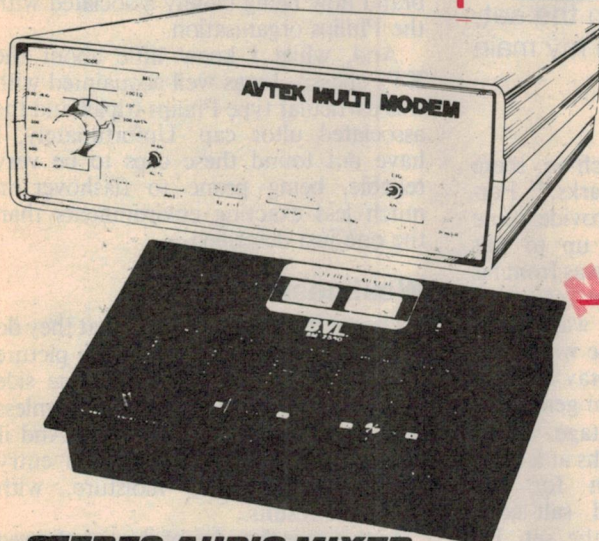

STEREO AUDIO MIXER

Brilliant mixing console is packed with features. It allows the blending of microphone, 2 phono inputs and either 2 tape or 2 tuner inputs. Some of its many features include: Right and left VU meters • separate bass and treble controls • 5 slide level controls • headphone monitoring switch • talkover facility • Frequency response 20Hz to 20kHz • Dimensions: 318(L) x 217(W) x 85(H)mm • operates from 240V mains.
Cat. AM-4000

ONLY \$99.50



UV EPROM ERASER

Erase your EPROMs quickly and safely. This unit is the cost-effective solution to your problems. It will erase up to 9 x 24 pin devices in complete safety, in about 40 minutes for 9 chips (less for less chips).

- ☆ Erase up to 9 chips at a time
- ☆ Chip drawer has conductive foam pad
- ☆ Mains powered
- ☆ High UV intensity at chip surface ensures thorough erase
- ☆ Engineered to prevent UV exposure
- ☆ Long life UV tube
- ☆ Dimensions 217 x 80 x 68mm
- ☆ Weight 670 grams

Cat. XE-4950

ONLY \$79.50

HORN MIDRANGE SPEAKERS

These all metal horn midrange speakers will add life to your disco or band system. Rated at 30 watts rms each, in a system they will handle over 100 watts.

4" x 10 1/2"
Dimensions: 102 x 268 x 192mm
Cat. CM-2082


3" x 7"
Dimensions: 183 x 75 x 163mm
Cat. CM-2084

ONLY \$34.50

ONLY \$28.50



Both units are rated at 8 ohms.



Computer Controller Cookbook

This amazingly practical book shows you how to BUILD peripherals for your personal computer. But not ordinary peripherals, exciting things like aeroplane wheel/joysticks, racing car steering wheel, sketch pads, super joysticks, foot pedals etc. It also shows you how to rebuild paddles and joysticks to improve their performance. Complete plans are provided for all projects (many of which are constructed out of wood). Absolutely amazing book full of practical information. Specific reference is made to the Atari and Apple computers, but the designs easily relate to other PCB's (reference is made to the VIC-20, IBM-PC and Tandy units). There is also an electronics tutorial, a section on mechanical construction, a few program listings for testing your completed units.
197 pages. 210(W) x 275(H)mm.

Cat. BM-0800

\$19.95

MAIL ORDER HOTLINE


To save you time (and therefore money) we have installed a special HOTLINE direct to the inner workings of our mail order dept. This saves you from going through our Head Office switchboard. If you wish to place an order, enquire about an order or simply check for more information, call:

(02) 646 1300

OPENING SOON!

Call in to our brand new store at 188 Pacific Highway GORE HILL. You can't miss it, just a few doors up from Dick Smith. We hope that all JAYCAR patrons on the North Shore will look us up. You're more than welcome!

TOROIDALS

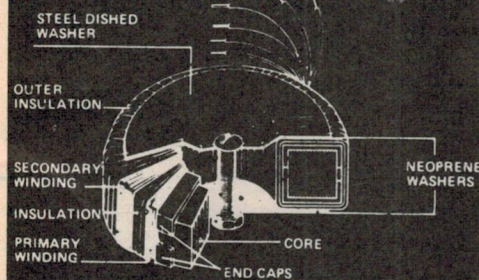

- Smaller size and weight to meet modern 'slimline' requirements.
- Low electrically induced noise demanded by compact equipment.
- High efficiency enabling conservative rating whilst maintaining size advantages.
- Lower operating temperature.
- Simple, quick, single bolt mounting.

The toroidal transformer is now accepted as the standard in industry, overtaking the obsolete laminated type. Industry has been quick to recognise the advantages toroidals offer in size, weight, lower radiated field, and thanks to Jaycar - LOW PRICE.

Cat. MT-2112 12+12V, 160VA
Cat. MT-2114 25+25V, 160VA
Cat. MT-2116 35+35V, 160VA

All priced at \$35.00
10 or more \$33.00 each

Cat. MT-2118 40+40V, 300VA
Cat. MT-2120 45/0/45V, 2 x 3.3A

All priced at \$42.50
10 or more \$39.95 each

Jaycar

ELECTRONICS

Incorporating ELECTRONIC AGENCIES
NUMBER 1 FOR KITS

N.S.W. SHOWROOMS
SYDNEY: 117 York Street Tel. (02) 267 1614
CARLINGFORD: Cnr. Carlingford & Pennant Hills Road Tel. (02) 872 4444
CONCORD: 115/117 Parramatta Road Tel. (02) 745 3077
HURSTVILLE: 121 Forest Road Tel. (02) 570 7000
GORE HILL: 188/192 Pacific Highway (Cnr. Bellevue Avenue) Tel. (02) 439 4799

QUEENSLAND BURANDA: 144 Logan Road Tel. (07) 393 0777
MAIL ORDERS: P.O. Box 480, AUBURN 2144 Tel. (02) 643 2000
HEAD OFFICE: 7/9 Rawson Street, AUBURN 2144.
Tel. (02) 643 2000 Telex: 72293

SHOP HOURS

Carlingford, Hurstville & Gore Hill
Mon-Fri 9am - 5:30pm, Thurs 8:30pm, Sat 12pm
Sydney
Mon-Fri 8:30am - 5:30pm, Thurs 8:30pm, Sat 4pm
Concord
Mon-Fri 9am - 5:30pm, Sat 4pm

POST & PACKING



\$5 - \$9.99 \$1.50
\$10 - \$24.99 \$3.20
\$25 - \$49.99 \$4.50
\$50 - \$99.99 \$6.50
\$100 - \$198 \$8.00
Over \$199 \$10.00

COMET ROAD FREIGHT ANYWHERE IN AUSTRALIA ONLY \$12



MAIL ORDER VIA YOUR PHONE





Close encounters of the first kind

One's first encounter with a particular model set can sometimes be both frustrating and unprofitable. If it so happens that the fault is a complex or multiple one, and one has only limited data on the set, then this result is almost certain. Such was the case with my main story this month — in addition to which, it bounced!

This frustration and possible financial loss is all part of the game. One can hardly charge the customer for one's own lack of experience; it has to be written off as such, and noted for future reference. In the long run it adds to the "experience" which is part of one's stock-in-trade, along with test equipment and basic training.

In the majority of cases the first encounter with a set may involve only a minor or straightforward problem, but it does provide the opportunity to find one's way around the set, at least in a general way. After two or three such encounters a sticky problem is not nearly as frightening; the general layout is known, a manual will have been acquired, and the job can be tackled with confidence.

But this story wasn't like that. While aware of the model set I had never had to work on one, and the only data I had was a copy of the circuit. Add to that several faulty components at the same time and you have a perfect scenario for wasted time and frustration.

The culprit was a Pye model 20A17, 51cm colour set, and the owner's

complaint was that, at switch-on, there were "... bangs and sparks." Fortunately, he was able to provide some useful background leading up to this behaviour. It seemed the set was from his holiday cottage down the coast, a beachside residence which was pretty well exposed to winds off the water and where corrosion from salt spray tends to be something of a problem in general.

And, being a holiday cottage, it was usually unoccupied for months at a time; a made-to-order situation for the accumulation of dust and salt-laden moisture in vital parts of the set. He didn't really need to tell me that the fireworks had occurred at the first switch-on after just such a long idle period. He went on to add that the "bangs and sparks" stopped and the set went completely dead before he could switch it off.

Nor did I need a textbook to tell me where to look first when I took the back off the cabinet; I went straight to the ultor cap on the picture tube. Sure enough, there was every indication of a flashover. The ultor cap was of clear plastic which I recognised as belonging

to a Philips tripler. In fact, the chassis turned out to be a Philips KT2, the Pye brand now being closely associated with the Philips organisation.

And, while I knew little about the KT2 chassis, I was well acquainted with this particular type Philips tripler and the associated ultor cap. Unfortunately, I have not found these caps to be very reliable, being prone to flashover in much less exacting environments than the one just described.


Weakness

One of their weaknesses is that they do not always grip the glass of the picture tube, often tending to lift on one side under the stress of the ultor lead unless this is very carefully positioned. And if the cap does lift, it provides an entry point for dust and moisture, with inevitable results.

In this case the edge of the cap showed signs of burning in several places, plus several black hair-like marks where the current had tracked across it. From here it had found a path across the clear area of glass surrounding the ultor, via moisture laden dust, to the aquadag coating.

I have sometimes salvaged situations like this by cleaning the cap, the picture tube around it, and then applying some "Silastic" under the cap and around it. This doesn't always work. Sometimes the cap is too badly carbonised, while cleaning the picture tube is not always

Below: the relevant circuit section of the Pye 20A17. Quite a number of components had failed.

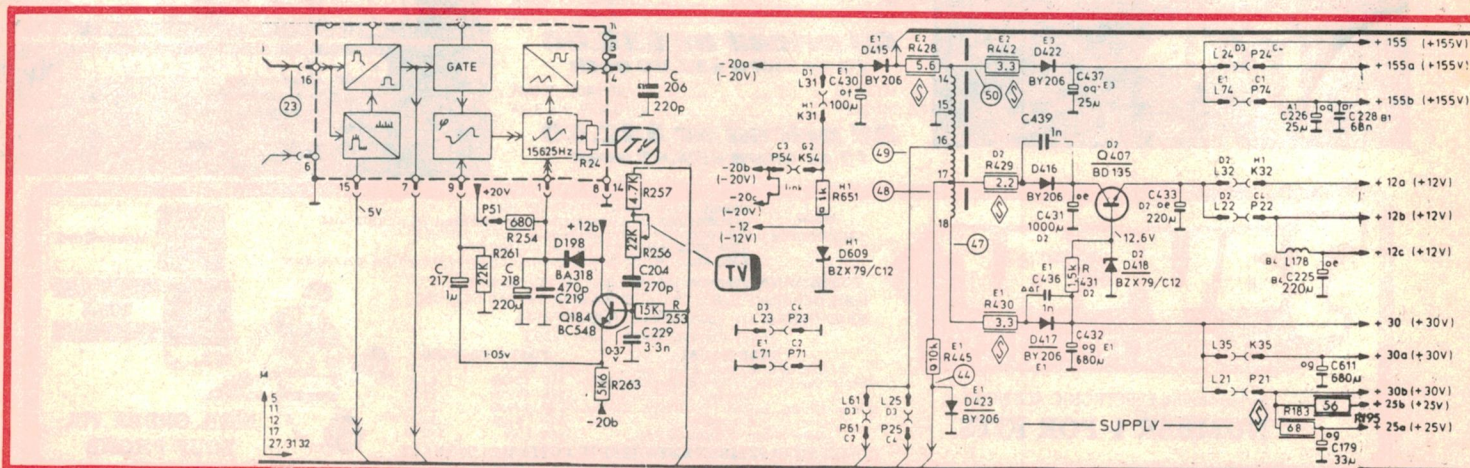

successful, particularly if, as in this case, there is a coating of paint, usually red, between the ultor and the aquadag.

I felt it was worth a try in this case, because the cap was in better condition than some I have salvaged, so I went ahead and cleaned everything up. Then, on another hunch, I checked the main fuses (F596, 597) and found one of them blown. This would account for the sudden cessation of fireworks observed by the owner.

I replaced the fuse, refitted the ultor cap, crossed my fingers and switched on. Splat — crackle — pop! The owner hadn't exaggerated; it was a fireworks display and a half. It lasted only a second or so before I switched off, but it was serious enough to worry me. In particular, I feared that the EHT was excessive — something which can happen in some line output stages — and which can easily puncture the picture tube. That would have to be checked.

But first I had to replace the ultor cap. As I mentioned in these notes some time ago (July, 1982) I make it a practice to save the ultor caps from discarded triplers, particularly the Rank Arena variety which are very good. Thus I can replace a faulty ultor cap, whereas I might otherwise have to replace the entire tripler.

So that was what was done in this case but, before refitting the cap onto the tube, I hooked it up to the EHT probe, just in case there was excessive EHT. As it turned out the EHT was virtually spot on, but I realised something else was wrong; there was no sound. I refitted the ultor cap and tried again and this produced the first sign of life on the screen; a bright horizontal line.

Voltage checks

At this stage it was logical that I should check the various voltage rails, of which the circuit indicated there were four. The main rail is at 131V and comes straight from the bridge rectifier and filter components in the main power supply.

The other three are derived from tapings on the line output transformer. One is at 155V, via a safety resistor, diode, and filter capacitor; the second at 30V using a similar circuit; and the third at 12V via similar components plus a voltage regulator network.

Which was all very fine on paper, but quite another matter when I started looking for these parts of the circuit in the actual set. The general layout of the set reminded me of the old Philips K9; three main boards, one on the left which is essentially the signal processing board, one on the right which is mainly the line deflection circuitry, and one on the bottom which carries most of the frame circuit, plus the sound channel.

But there the similarity ended. Some early sections of the frame circuit are on the signal processing board, as are some sections of the power supply. Other sections of the power supply are on the line board. And, while I have no doubt that Mr Philips had good reasons for doing things this way, I found it far more confusing than the more clear cut divisions of sections as used on the K9.

The end result was that I spent a lot of time — I nearly said "wasted", but it wasn't really — finding my way around the set and locating the voltage rails I wanted to check. When I did finally track them down I found that the main 131V rail was normal, as was the 155V rail from the line output transformer, but that the 30V and 12V rails were dead.

In one sense this was not surprising because the 30V rail supplies the vertical deflection output stage, while the 12V rail supplies earlier vertical stages, some of the sound channel, and the signal processing board. More to the point was the reason for their failure and one of these was immediately obvious. The 30V rail is fed through a 3.3Ω safety resistor, R430, and the 12V rail similarly via a 2.2Ω unit, R429. Both had been overloaded to destruction.

These safety resistors are, in fact, nothing more than marginally rated

resistors — about half watt in this case — which are designed to be sacrificed in the event of an overload. In short, they are little more than a glorified fuse.


I decided that the best approach was to replace these resistors to determine, first, whether they continued to cook and, even if they did, to give me a few moments to make appropriate voltage measurements in an effort to isolate the reason. I further decided to tackle them one at a time, to make things less hectic.

I tackled the 12V rail first, hoping that this would restore the sound at least, and prepare the way for restoring the vertical deflection. This circuit consists of the 2.2Ω resistor already mentioned, diode D416, 1000μF filter capacitor C431, regulator transistor Q407, zener diode D418, and some minor components.

At switch-on the substitute 2.2Ω resistor showed signs of distress immediately, but held on long enough for me to make a couple of quick measurements, one of which established that there was no DC voltage at the collector of Q407. The reason was quickly established; diode D416 was short circuit, probably as a result of the original fireworks display.

Replacing D416 produced some worthwhile results at last. We had sound and every indication that most of the set was working. The remaining fault was the dead 30V rail and lack of vertical scan. Taking a punt I checked its diode, D417, in the hope that it, too, might have suffered the same fate as D416. But things are never that easy; it was intact.

I could find nothing else wrong around this part of the circuit, and the implication was that the excessive current drain was due to a fault in the vertical output stage, which is a complementary symmetry pair, Q612 and 613. This stage is fed by a string of six transistors, Q606 to Q611, all mounted on the previously mentioned bottom board. Two other stages in this string, Q187 and Q188, are on the signal processing board, along with module U177 (more on this section later).

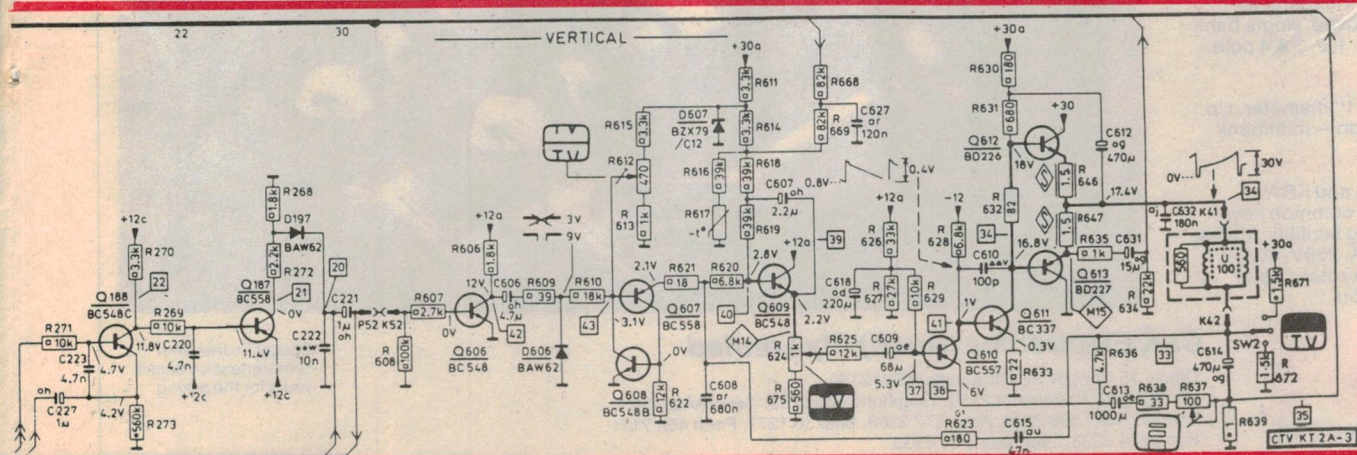

The Serviceman

Output stage

Of more immediate importance was the vertical output stage, mainly because two 1.5Ω safety resistors in the emitter circuits of Q612 and Q613 both showed signs of having been overloaded, even though a measurement showed that they had increased their value only very slightly. I replaced them as a matter of course and, at the same time, checked both transistors for possible breakdowns, using a conventional analog ohmmeter. Both checked out OK.

At this stage I decided to upgrade the resistor in position R430 in order that I could apply some brute force if needed, and have a little more time to make measurements before the resistor failed completely. So I organised a unit of around 3W rating. At the same time I found it relatively easy to interrupt a link conveniently located between this 30V rail and the collector of Q612, the upper one of the output pair.

Using this setup I was able to confirm that all the excess current drain was due to the output pair; as soon as this was disconnected all signs of distress around the 30V rail vanished. And it was only a step from here to discover that Q612,

which had tested OK with the ohmmeter, was in fact breaking down at the higher voltage. (Another trap for young players — and older ones!)

The transistor was replaced and this improved matters a good deal, but things were still not right. The stage was still drawing more current than it should, with every indication that both transistors were permanently turned on. This, in turn, suggested that this could be due to lack of drive. A check with the CRO confirmed this; there was no sawtooth drive to the output stage.

And this is where things started to go wrong; partly due to a wrong decision on my part and partly due to lack of information on the circuit. The circuit shows very little in the way of waveform information in this section; just the output waveform and the drive waveform to the output pair. (I subsequently gained access to a manual for this chassis, but it provided very little more waveform information.)

The fault obviously lay somewhere between the output stage and sawtooth generator at the other end of the vertical chain. I wasn't quite sure where this sawtooth circuit was, but imagined it was in the module U177. And Murphy's Law states that, in endeavouring to find a fault in a circuit chain, one will always start at the end furthest from the fault. Also, if one attempts to circumvent this

law by starting in the middle, one will always proceed first in the wrong direction.

In my case I initially went to the wrong end of the chain in an attempt to determine whether the sawtooth was actually being generated, an exercise that I imagined would be simple enough. Instead I found myself struggling with a totally unfamiliar circuit, which I still haven't worked out, even with the aid of the manual. After much contemplation of the circuit and manual it appears that the sawtooth is generated in the Q188, Q187 network which, apparently, functions as some kind of switching arrangement.

Just how it generates the sawtooth I don't know, but it is fed with two lots of pulses from U177 — pins 7 and 15 — which presumably are derived from the sync pulses. In addition it is fed with a complete video signal from the video detector. Maybe someone else can explain it.

Anyway, the point is that I suddenly realised that I had allowed myself to be sidetracked; that I was spending a lot of time trying to work out the theory of the circuit when, in terms of finding the fault, this didn't matter two hoots. Murphy had well and truly conned me. (Well, I have to blame someone!)

With this realisation I did what I should have done in the first place;

LORLIN supa-switches from C&K

MAINS SWITCHES

Type MS — Rotary action DPST, suitable for inductive circuits.

Type PBMS — Pushbutton (push on / push off). Ideal for TV industry. Both types 4A at 250V, 80A. surge.

PRINTED TRACK SWITCH

Type PT — Offering outstanding, cost saving design — multibank.

ROTARY WAFER SWITCHES


Type CK — Inexpensive totally enclosed, single bank 12 position, 1, 2, 3 & 4 pole.

MINIATURE ROTARY SWITCH

Type RA — 1" diameter. Up to 12 position — multibank.

SECURITY KEY SWITCHES

Types KMS and KRA — Random or common keys, key trapping facility. Mains switch at 4A, 250V, 80A. surge or RA rotary wafer, multi position.

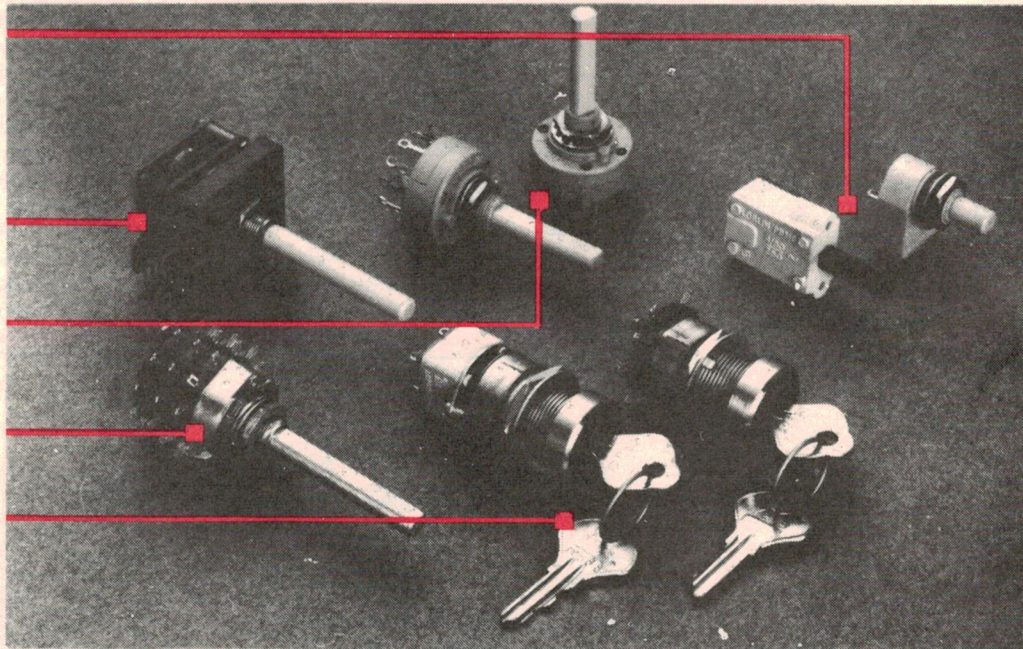

C&K
COMPONENTS

C&K Electronics (Aust.) Pty Limited

Office: 15 Cowper St, Parramatta NSW 2150.

PO Box 229, Parramatta 2150. Telephone 635 0799. Telex AA23404

Agents: Melb. 598 2333. Adel. 277 3288. Bris. 36 1277. Perth 458 7111.

Hobart 34 2233. Launceston 31 6533

Obligation free and
comprehensive data is
yours for the asking.

Radio Despatch Service

ESTABLISHED 1934

CLEAN UP SALE

Excess Stock Reduced

TOOLS:

Phillips & Allan key wrench sets.
6 pce. Jewellers screwdriver sets.
Long nose pliers.
Miniature precision tool kits.
Side cutting pliers 6".
Automatic wire strippers.

NOW:

\$1.50
\$1.00
\$2.50
\$1.00
\$2.00
\$6.00

WERE:

\$3.00
\$2.50
\$4.50
\$2.50
\$2.95
\$8.60

Our Sydney store stocks
EVERY PC Board printed in
"Electronics Australia" and
"Electronics Today International". Over 1100 Boards
in stock. Front Panels to
order.

OBSOLETE and EXCESS CAPACITORS:

Popular values and high voltages.

Includes — anocaps, electros — colour coded polyesters all 5c each

SWITCHES:

Rotary wafer switches.
Miniature push button (N/O, N/C)
Heavy duty toggles
Sliders

to name a few — all over 75% off.

TRANSFORMERS:

125v, 200MA
30vct, 1A
15v, 2A
30v, 0.6A
24v, 1.25A, 24v, 0.5A
12.6vct, 2A
30vct, 2A

ALL MORE THAN 50% off.

PANEL METERS:

Many at clearance prices.
e.g. 200 μ A
50 μ A

many sizes (simply shunt for any application) NOTHING OVER \$6.50

AUTOMOTIVE RADIO SUPPRESSORS:

AC grounding caps alternator or coil 20c. each
High Tension inline suppressors 30c. each

EDGE CONNECTORS:


Board or edge mounting complete with metal mounting feet, but not cut to size all \$2.50

MANY MORE ITEMS: (Too many to list)

LIMITED STOCKS:

Radio Despatch Service

869 GEORGE STREET SYDNEY 2000
TELEPHONES 211 0744 • 211 0816



The Serviceman

checked for a sawtooth waveform at the base of Q606. And when I did, there it was; a typical vertical sawtooth waveform. To be sure, I had no data against which to check its amplitude, but its mere presence was enough.

From this point I was able to trace the waveform through as far as the base of Q609, but at the emitter of this stage, where it is supposed to come out, there was nothing. Nor was the reason hard to find; Q609 was short circuit, collector to emitter.

Replacing it restored the drive to the output stages and, in turn, allowed me to restore the 30V supply to these without overloading this supply rail. The heavy duty replacement for R430 was removed and the correct safety resistor fitted, which functioned without any signs of distress.

And, of course, we had vertical scan and a picture. A first class picture too and, apart from routine tidying up, that was the end of the story. Or so I thought.

Setbacks

After finishing it off I left it running on one end of the bench as a routine check before the customer called to pick it up. It ran like that for several hours until I left the workshop briefly, then came back to find the set completely dead. It was a nasty shock.

The only bright spot was that I now knew my way around the set a lot better than when I started. A quick check revealed that safety resistors R429 (12V rail) and R430 (30V rail) had both burned up again. Feeling a little more confident now I replaced both safety resistors, switched on, and watched. Both resistors started to cook immediately.

Taking a punt, I removed R430, fitted a new R429, and tried again. And for once I had taken things in the right sequence, because the fault turned out to be our old friend diode D416, the one I had previously replaced. This was somewhat disconcerting because my replacement had been rated rather higher than the one which had failed. I wasn't very happy about it but, in the absence of any obvious fault, I could only write it off as coincidence.

A new diode put everything back to normal. It was largely a repeat of the original sequence: failure of D416 had killed the 12V rail which, in turn, had robbed the vertical output stage of drive, turned this stage full on, overloaded the 30V rail, and taken out safety resistor R430. Allowed to continue, the turned-on output stage would also have overloaded safety resistors R646 and

R647 in this stage.

I put the set on test again for the remainder of the day, and all the following day, and it didn't miss a beat. As far as I could determine there was nothing wrong with it; nor could I find any reason why the second diode had failed. So it was duly returned to the customer and several weeks have gone by without any repercussions. Let's hope that's the end of it.

Footnote

Not long after I had written the above, but before I could deliver it to the EA office, the set bounced. It was frame collapse again, but only partial this time, leaving about 50mm of vertical scan.

It didn't take long to find the reason; Q612 in the vertical output stage — and the one I had replaced — had packed it in. No other damage had resulted and a new transistor put everything right again. But I can't help wondering — why did two of the components I replaced fail a second time? Is it coincidence or is there a subtle fault somewhere generating an occasional spike that is taking these components out?

That's a horrible thought, I know, but I can't discount it entirely. On the other hand, there is not much I can do about it except keep my fingers crossed and wait and see. If the same thing happens again — well, let's hope it doesn't.

Reader feedback

And now for a comment from the mailbag. Mr C.H.S. (MIE Aust) of East Kew, Victoria, writes concerning a story which appeared first in the June 1983 notes, with a sequel in the following August notes. Very briefly it concerned a National 22/23 TV receiver which refused to tolerate the 2A fuses specified on the cabinet sticker and the circuit, and which ultimately had to be fitted with 4A fuses for reliable operation.

At the time I eventually concluded that the difference was due to the fact that the 2A fuses were specified for the hot chassis version of this set, whereas the one on the bench used a (factory fitted) transformer. It seemed to me that the losses in the transformer probably resulted in enough extra current to justify the larger fuses and that these had, in fact, been fitted originally, but that the cabinet sticker was wrong.

After apologising for the belated comment, C.H.S. goes on to support my suggestion that the transformer was the culprit, but for a different reason. This is how he sees it.

Your notes in the June 1983 (pp 81, 82) and August 1983 (pp 70, 71) issues of *Electronics Australia* have just come to my attention and I would like to comment on the problems you had with the National 22/23 TV receiver.

I refer particularly to your surmise that the differences in the fuse blowing tendencies of the various versions of the receiver was due to the presence or absence of mains transformers.

I am certain that your surmise is correct, but that the reason for the difference is not the additional current due to transformer losses but to the transient current which flows at switch-on.

When an iron cored transformer is energised a transient current will flow for a short period; a fraction of a second for small transformers used in electronic equipment, but for much longer in large transformers used in electricity supply systems.

The magnitude of this current varies over wide limits and depends on the precise point of the supply voltage wave at the moment of switch-on. The mechanism involved is explained in the attached extract from *Wireless World*, December 1978.

The elegant solution with small transformers is to fit time-delay (slow blow) fuses, but a common practice is to fit ordinary fuses with a rating well above that required for the steady-state current.

I am sorry that these comments are so belated, possibly too much so for mention in your column, but at least they will put your mind at rest, confirming the conclusion you drew at the time.

Thank you C.H.S. As you can see, your belated comment was well worth publishing. I have no doubt that your theory is the more correct one, and the random nature of the switch-on surge would help explain some of the inconsistencies I observed at the time.

After some thought I decided against publishing the material from *Wireless World*, on the basis that it would probably make rather heavy going for most servicemen, being strictly in the engineering category. However, the reference (December 1978) is there for anyone who feels inspired to follow it up.

TETIA

Fault of the Month

Kriesler 59-04

Symptoms: Horizontal position unstable. Picture shifts to the right, width varies. Horizontal centring control ineffective.

Cure: C707 (.022 μ F 250V ceramic) intermittent open circuit. This capacitor and its associated resistor damp the ringing in the horizontal output driver transformer and so prevents mistiming of flyback.

at the leading edge

NetSource PC LAN LINKS UP TO 254 WORKSTATIONS

The **WD4028**, user installed, **Token Access Controller** from **Western Digital** offers high, contention-free, **network** performance. Station dropouts are automatically compensated for by hardware. **MS-DOS** compatible software is supplied with the board and virtually any multi-tasking operating system can be supported.

OptoMos PRICE PLUNGE COULD JOLT DIP REED MARKET

With quantity prices dropping from \$9.00 to around \$4.00 **Theta-Js*** **optically coupled VMOS** will find more applications in telephone and instrumentation related fields. The **six pin DIP** LCA-110 can handle both **AC** and **DC** voltages from microvolts to **300 V** peak and currents from microamps up to **100 mA**.

VOICE BAND SCRAMBLER CHIP BEATS SNOOPERS

CML are hailing their **FX3X6** as the answer to the problem of privacy on shared or accessible voice links such as cellular radio or telephone networks. It uses a **rolling digital code** controlling a **variable band split frequency inversion** technique. This allows for **real-time scrambling** without the delay problems associated with traditional A to D, D to A methods.

DATA SECURITY BOARD SLOTS INTO IBM's PC, XT & AT

Encryption and decryption of files, transparent to application software, is achieved by **Western Digital's* WD2200**. A user customisation utility supports most PC configurations running **MS-DOS**. The **NBS Data Encryption Algorithm** based product secures disk, modem or LAN communications and system integrity can be maintained by a **user programmable key**.



daneva australia Pty Ltd
64-66 Bay Road Sandringham Victoria 3191
Australia PO Box 114 Sandringham 3191
Telephone (03) 598 5622 Telex AA34439

Sydney: E&M Electronics (02) 51 5880
Adelaide: DC Electronics (08) 223 6946
Brisbane: Baltec (07) 369 5900

* Registered T.M. International Business Machines Corp.

NEW FOR 85!

Bigger, Brighter Better than ever

Over 500 new products

Over 20 new Stores

Now in 3 countries

**Now DSXPRESS
Toll Free**

7 ways to order

4 ways to receive

**Expanded computer
range.**

**Expanded component
range.**

**Expanded Hi-Tech
range, Satellite TV etc.**

HERE IS YOUR BRAND
NEW, PRIME SPEC,
GUARANTEED 1985/6
DICK SMITH
ELECTRONICS
CATALOGUE.

WITH THE COMPLIMENTS
OF YOUR FRIENDLY DICK
SMITH ELECTRONICS STORE
STAFF (NOT FORGETTING
DSXPRESS AND EVERYONE
AT HEAD OFFICE!)

TO REMOVE, SIMPLY GRASP
THE CATALOGUE IN ONE HAND,
AND THE REST OF THE MAGAZINE
IN THE OTHER. PULL APART – AND
RECLOSE THE MAGAZINE STAPLES SO
YOU DON'T LOSE ANY WORDS OF
WISDOM.

NOW YOU CAN THROW
AWAY ALL THOSE IMITATION
CATALOGUES THAT HAVE BEEN
CRAMMING THE MAGAZINES
LATELY – AND KEEP THE ONE
THAT REALLY MATTERS:

**THE DICK SMITH
ELECTRONICS
CATALOGUE**

**DICK SMITH
ELECTRONICS**
PTY LTD



What! No Catalogue???

Some light-fingered larcenous larrikin has lifted it, eh? Beaten you to the punch?

Stop crying this instant!

Hurry down to your nearest Dick Smith Electronics store or reseller, and for the measly price of just one dollar you'll receive your very own, brand new copy. And there's even a coupon inside to get your buck back with any purchase over ten dollars!!!

A tip! Put your name on it straight away. Preferably in about ten places. Dick Smith Electronics catalogue are so sought after that your new one will almost certainly disappear if you're not careful!!

Can't get into a Dick Smith Electronics store?

Use this coupon and we'll send you one. It will still cost you a dollar - but we'll pick up the postage!

Name.....

Address.....

Help! someone's stolen my catalogue. I cannot possibly last the rest of 1985 without one. Please send me one post haste!

Send to DSXpress PO Box 321, North Ryde, NSW 2113

PO Box 321, North Ryde, NSW 2113

STORE LOCATIONS

NSW

Cnr. Swift & Young Sts.
T55 Terrace Level
Shop 1, 65-75 Main St
613 Princess Hwy
Oxford & Adelaide Sts
531 Pittwater Rd
Campbelltown Mall, Queen St
Shop 235, Archer St Entrance
147 Hume Hwy
162 Pacific Hwy
315 Mann St
4 Florence St
Elizabeth Dr & Bathurst St
450 High St
173 Maitland Rd, Tighes Hill
Lane Cove & Waterloo Rds
George & Smith Sts
The Gateway, High & Henry Sts
818 George St
6 Bridge St

Albury 21 8399
Bankstown Sq. 707 4888
Blacktown 671 7722
Blakehurst 546 7744
Bondi Junction 387 1444
Brookvale 93 0441
Campbelltown 27 2199
Chatswood Chase 411 1955
Chullora 642 8922
Gore Hill 439 5311
Gosford 25 0235
Hornsby 477 6633
Liverpool 600 9888
Maitland 33 7866
Newcastle 61 1896
North Ryde 88 3855
Parramatta 689 2188
Penrith 32 3400
Railway Sq 211 3777
Sydney 27 5051

125 York St
Tamworth Acde & Kable Ave
263 Keira St
ACT
96 Gladstone St
VIC
Creswick Rd & Webster St
145 McCrae St
Shop 46, Box Hill Central, Main St
260 Sydney Rd
Cnr Hawthorn Rd & Nepean Hwy
1150 Mt Alexander Rd
Nepean Hwy & Ross Smith Ave
205 Melbourne Rd
291-293 Elizabeth St
Bridge Rd & The Boulevarde
Springvale & Dandenong Rds
QLD
293 Adelaide St
166 Logan Rd

Sydney 267 9111
Tamworth 66 1961
Wollongong 28 3800
Fyshwick 80 4944
Ballarat 31 5433
Bendigo 43 0388
Box Hill 890 0699
Coburg 383 4455
East Brighton 592 2366
Essendon 379 7444
Frankston 783 9144
Geelong 78 6766
Melbourne 67 9834
Richmond 428 1614
Springvale 547 0522
Brisbane 229 9377
Buranda 391 6233

Cnr Queen Elizabeth Dr & Bernard St
Cnr Gold Coast Hwy & Welch St
Bowen & Ruthven Sts
Ingham Rd & Cowley St. West End
SA
Wright & Market Sts
Main South & Flagstaff Rds
Main North Rd & Darlington St
24 Park Terrace
WA
Wharf St & Albany Hwy
66 Adelaide St
William St & Robinson Ave
Centraway Acde, Hay St
TAS
25 Barrack St
NT
17 Stuart Hwy

Rockhampton 27 9644
Southport 32 9863
Toowoomba 38 4300
Townsville 72 5722
Adelaide 212 1962
Darlington 298 8977
Enfield 260 6088
Salisbury 281 1593
Cannington 451 8666
Fremantle 335 9733
North Perth 328 6944
Perth City 321 4357
Hobart 31 0800
Stuart Park 81 1977

Watch for a new store in your area!

Dear Customers,

Quite often, the products we advertise are so popular they run out within a few days, or unforeseen circumstances might hold up shipments so that advertised lines are not in the stores by the time the advert appears. And very occasionally, an error might slip through our checks and appear in the advert (after all, we're human too!) Please don't blame the store manager or staff: they cannot solve a dock strike on the other side of the world, nor fix an error that's appeared in print. If you're about to drive across town to pick up an advertised line, why not play it safe and give them a call first... just in case! Thanks.

Dick Smith Electronics

MAJOR RESELLERS

NSW — **Ballina:** A. Cummings & Co. 91-93 River St 86 2284 • **Bowral:** Barry Gash Electronics, 370 Bong Bong St 61 2577 • **Broken Hill:** Hobbies & Electronics, 37 Oxide St 88 4098 • **Charlestown:** Newtronics, 131 Pacific Hwy 43 9600 • **Coffs Harbour:** Coffs Harbour Electronics, 3 Coffs Plaza, Park Ave 52 5684 • **Deniliquin:** Deni Electronics, 220 Cressy St 81 3672 • **East Maitland:** East Maitland Electronics, 99 High St 33 7327 • **Gosford:** Tomorrows Electronics & HiFi, 68 William St 24 7246 • **Inverell:** Lyn Willing TV, 22A Evans St 22 1821 • **Lismore:** Decro Electronics, 3A/6-18 Carrington St 21 4137 • **Port Macquarie:** Hall of Electronics, Horton Centre, Horton St 83 7440 • **Orange:** M & W Electronics, 173 Summer St 62 6491 • **South Tweed Heads:** Shop 1, Inessa Court, Blundell Boulevard 36 1077 • **Swansea:** Swansea Electronics, 184 High St 71 1674 • **Wagga:** Wagga Wholesale Electronics, 89 Forsyth St • **VIC** — **Hamilton:** John Thompson & Co, 138-148 Gray St 72 2000 • **Echuca:** Webster Electronics, 220 Pakenham St 82 2956 • **Mildura:** McWilliams Electronics, 110A Langtree Ave 23 6410 • **Morwell:** Morwell Electronics, 95 George St 34 6133 • **Shepparton:** G.V. Electronics Centre, 100 High St 21 8866 • **QLD** — **Atherton:** Maarten's Music Centre, 55 Main St 91 1208 • **Bundaberg:** P.M. Electronics, Takalvan St 72 8272 • **Cairns:** Electronic World Shop, 27 K-Mart, Westcourt Plaza, Mulgrave Rd 51 8555 • **Gladstone:** Purely Electronics Shop, 2 Cnr Herbert & Auckland Sts 72 4321 • **Mackay:** Stevens Electronics, 42 Victoria St 51 1723 • **Maryborough:** Keller Electronics, 218 Adelaide St 21 4559 • **Rockhampton:** Purely Electronics, 15 East St 21 058 • **SA** — **Mt Gambier:** Hutchesson's Comm. 5 Elizabeth St 25 6404 • **Whyalla:** Eyre Electronics, Shop 2 Forsythe St 45 4764 • **WA** — **Albany:** Micro Electronics, 133 Lockyer Ave 41 3432 • **TAS** — **Launceston:** Advanced Electronics, 5A The Quadrant 34 1399 • **NT** — **Darwin:** Ventronics, 24-26 Cavanagh St 81 3491

HEAD OFFICE & DS XPRESS ORDER SERVICE

P.O. Box 321, North Ryde, N.S.W. 2113. Tel: 888 3200


SPEEDY PHONE/BANKCARD ORDER SERVICE

Just phone your order and Bankcard — it's so simple! (008) 226610 orders only on this number. Enquiries: (02) 888 3200

POST & PACKING CHARGES

Order Value	Charge	Order Value	Charge
\$ 5.00-\$ 9.99	\$2.00	\$50.00-\$99.99	\$6.00
\$10.00-\$24.99	\$3.50	\$100 or more	\$8.00
\$25.00-\$49.99	\$4.50		

Terms available to approved applicants



DICK SMITH ELECTRONICS

PTY LTD

Build this photographers' darkroom aid!

Versatile film processing timer

Looking for an easy-to-build film processing timer? This unit tells you when to agitate the developing tank and emits a pulsed tone at the end of the developing period.

by DOUGLAS BOLTON

Probably the most common system employed these days for amateur processing of black and white film is the "time-temperature" method using a light-proof developing tank. Although colour processing is outside the writer's experience, it is also presumably the only system for colour work. The temperature, for black and white films, is generally standardised at 20°C, so that the developing time is ultimately determined by the film used and the working strength, or degree of dilution, of the developer. This time is arrived at by reference to tables of data provided by the film and/or developer manufacturer, and from the worker's own experience.

In any case, the times are normally based on regular agitation of the tank during development, usually for ten seconds every minute, on the minute. It is fair to say that almost everyone in this situation makes use of an analog or digital stopwatch, or a ringer-timer

which "goes off" like an alarm clock at the end of the preset period.

So far so good. However, in the writer's experience, complications can ensue. Particularly in a domestic situation (the classic kitchen bench or bathroom set-up), it is possible to be distracted from the critical task of watching that second hand to ensure that one agitates the tank at the correct intervals, and to ensure that development is terminated at the appropriate time. Domestically, one's attention may be taken by something on the radio or TV, or by any one of a dozen minor household crises.

Even in a professional darkroom, a knock on the door, a question bellowed through the door or the presence of a second person in the darkroom can have the same result.

It is with the foregoing in mind that this project was devised, developed (no pun intended) and constructed. What it

does is this: at switch on a loud beeping tone is heard. Ignoring this for the moment, you start pouring developer solution into the loaded tank and, while pouring, you press the START switch with the free hand. This stops the beeping, which is replaced by a continuous note of five or six seconds duration.

At this point, having finished pouring, you give the tank its first agitation. One minute after pressing the START switch another long note occurs to indicate that it is agitate time again, and so on every minute.

At the end of the preset time, which is selected by a 12-position rotary switch and two toggle switches, the pulsed tone starts up again to indicate that it is now time to terminate development; ie, to pour the developer out of the tank. After rinsing the film can be fixed, again using the timer to indicate the preferred fixing time.


Be assured that the note emitted by the buzzer specified is very noticeable and impossible to ignore!

How it works


Let's now discuss how the circuit works. It might be as well to start with the aforementioned buzzer. This is a piezo device made by Murata and designated type KPE-657. It needs a DC supply of from 3 to 28V and, with the 5V supply rail used here, draws 6 or 7mA. It has three terminals, marked "+", "C" and "-".

The terminal marked "+" is actually the common and is connected to supply positive. If the terminal marked "C" is taken to supply negative a continuous 3kHz note results, while if the "-" terminal is connected to negative the note is pulsed. The pulse rate varies inversely with the supply voltage and is about 2Hz at 5V. The three terminals "+", "C" and "-" from here on will be referred to as *common*, *continuous* and *pulsed* respectively.

Looking at the circuit diagram we see that the common terminal goes to +5V,

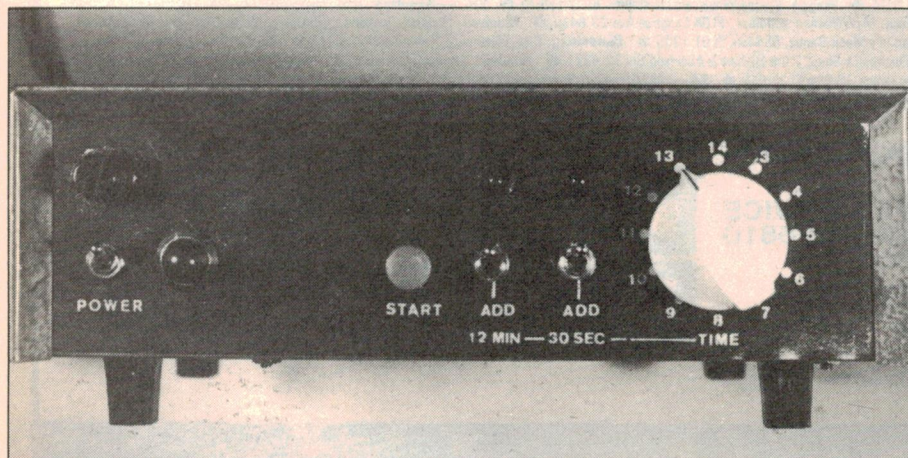

The prototype covers the range from 3 to 26.5 minutes in half minute increments.

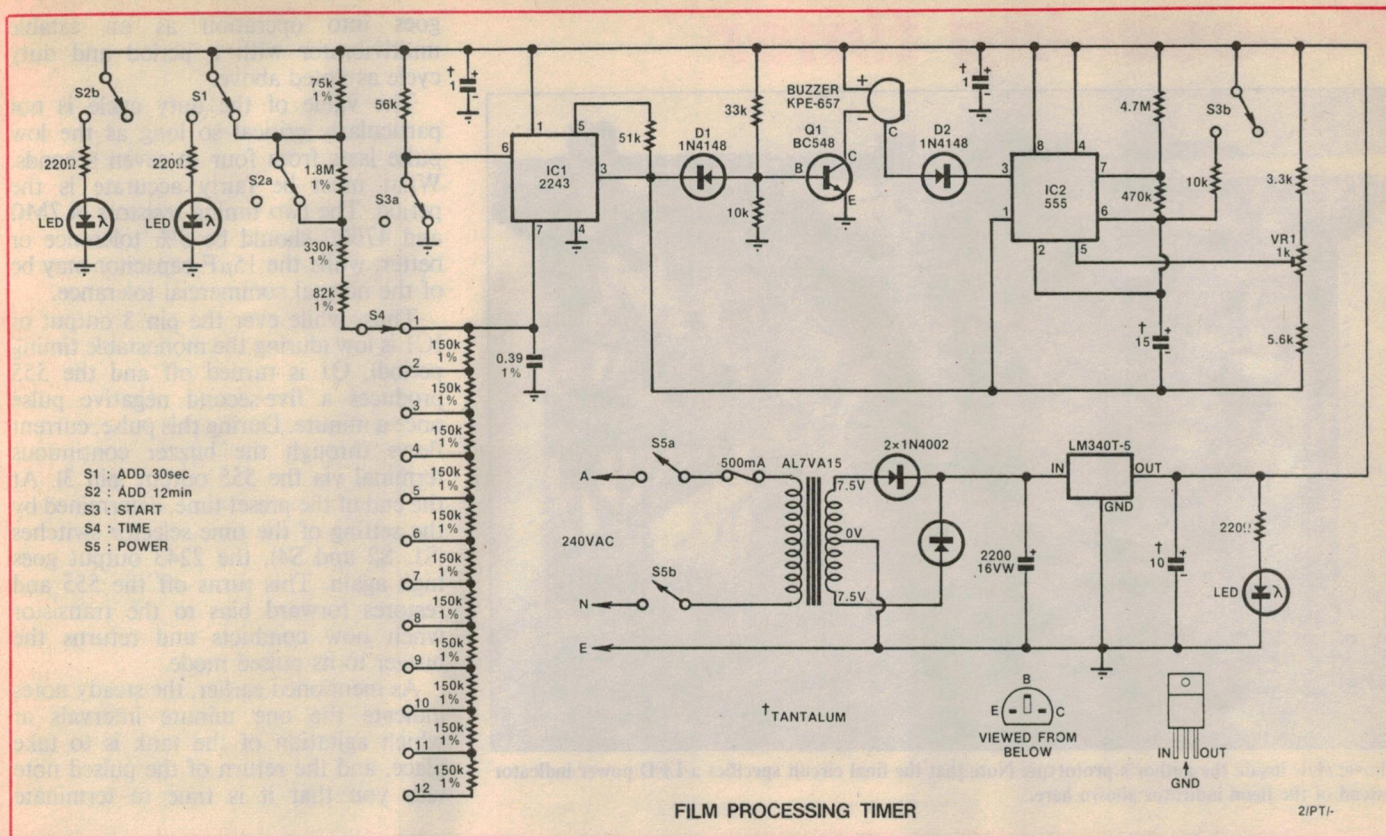

IC1 provides the basic timing function while astable oscillator IC2 provides the timing for the continuous tones.

the continuous terminal is connected via a diode to the output of 555 timer IC2, and the pulsed terminal is in series with the collector of common emitter NPN transistor Q1. The transistor is normally biased on by the voltage divider network connected to its base.

Now let's consider the 2243 timer (IC1) to the left of the transistor on the circuit. Although this device has been described in a feature article in an earlier issue of *EA*, a recap might be in order.

At the heart of the 2243 is a symmetrical square wave oscillator, the frequency of which is determined by an external RC network connected to pin 7. The oscillator does not start spontaneously at switch on, but must be triggered by application of a positive pulse of at least 1.5V to the trigger terminal at pin 6. Input impedance of the trigger is 25kΩ; there is a 56kΩ resistor from +5V to pin 6 and a normally closed pole of the START switch (DPDT spring return) from there to ground. Operation of the switch thus applies a little over +1.5V to pin 6 by voltage divider action and the oscillator starts.

The oscillator output is connected internally to the first of a string of cascaded bistable flipflops. Each time the oscillator output goes negative, the first flipflop changes state; whenever that flipflop output goes negative the second one changes state, and so on through to the last one in the string. The output of the last stage is a negative going pulse,

2¹⁰ or 1024 times as long as the period of the basic oscillator.

So overall, the operation of the 2243 goes like this: at switch on the oscillator is quiescent and the output at pin 3 is high. On application of a trigger pulse at pin 6 the oscillator starts, and pin 3 is set low by a secondary action of the trigger signal. When the oscillator has completed 1024 cycles, the output at pin 3 switches high again.

The length of the low pulse at pin 3 is 1024 times the oscillator period, or 1024RC seconds. The maximum permitted values of R and C are 10MΩ and 1000µF, meaning that it is theoretically possible to have an output pulse length of just less than 17 weeks!

The 51kΩ resistor from output to reset at pin 5 stops the oscillator when pin 3 reverts to high, resulting in a monostable configuration. Omission of the 51kΩ resistor would allow the oscillator to keep running indefinitely (after triggering) as an astable multivibrator of period 2048RC seconds, or slightly less than 34 weeks for the values quoted above.

For the present application we want times ranging from three minutes to 26 minutes, and these are set by the 0.39µF capacitor and the chain of resistors and associated switches around pin 7. A combination of 0.39µF and 150kΩ gives a basic oscillator period of 58.5ms and an output pulse at pin 3 of 59.904 seconds, near enough to one minute for our


purposes. All the timing resistors are multiples (and one sub-multiple) of 150kΩ; more on this later.

To the right of the buzzer on the circuit is the 555 timer (IC2). This is wired in astable mode with a period of one minute and duty cycle such that the output at pin 3 is low for five or six seconds every minute. The actual period is set to 60 seconds during the setting up procedure by the adjustable voltage divider connected to pin 5 (threshold). Negative return for the 555 is via the output terminal of the 2243. The positive supply pins of the 555 and the 2243 are each bypassed by a 1µF tantalum capacitor close to the appropriate pins on the PCB.

Now let's see how the whole thing works. At switch on, the 2243 is quiescent so pin 3 is high, cutting off the 555. The transistor is on and conducts current through the pulsed terminal of the buzzer, which accordingly emits a pulsed note. Note that the output of the 2243 is at a higher voltage than the transistor base; the diode between them isolates the 2243 output from the transistor bias voltage.

If the START switch is now pressed, the 2243 receives a trigger pulse, the oscillator is enabled and pin 3 goes low. This grounds the transistor base via the diode and thus Q1 turns off, stopping the pulsed note. The 555 is also now enabled, with its negative return completed through the 2243 output; it immediately

Processing timer

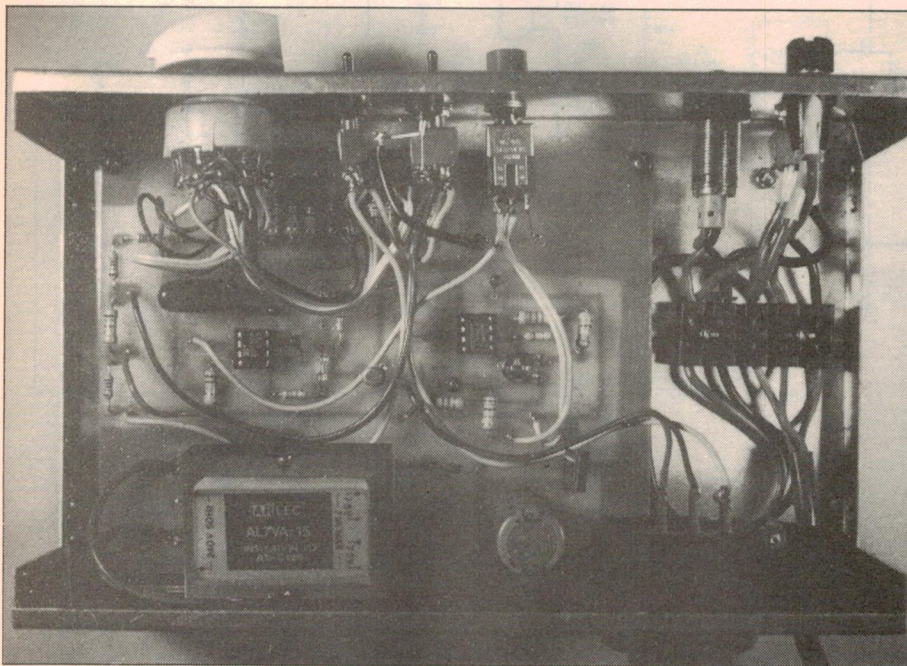


Above: view inside the author's prototype. Note that the final circuit specifies a LED power indicator instead of the neon indicator shown here.

goes into operation as an astable multivibrator with a period and duty cycle as noted above.

The value of the duty cycle is not particularly critical so long as the low pulse lasts from four to seven seconds. What must be fairly accurate is the period. The two timing resistors (4.7M Ω and 470k Ω) should be 5% tolerance or better, while the 15 μ F capacitor may be of the normal commercial tolerance.

Thus, while ever the pin 3 output of IC1 is low (during the monostable timing period), Q1 is turned off and the 555 produces a five-second negative pulse once a minute. During this pulse, current flows through the buzzer continuous terminal via the 555 output (pin 3). At the end of the preset time, determined by the setting of the time selector switches (S1, S2 and S4), the 2243 output goes high again. This turns off the 555 and restores forward bias to the transistor which now conducts and returns the buzzer to its pulsed mode.

As mentioned earlier, the steady notes indicate the one minute intervals at which agitation of the tank is to take place, and the return of the pulsed note tells you that it is time to terminate

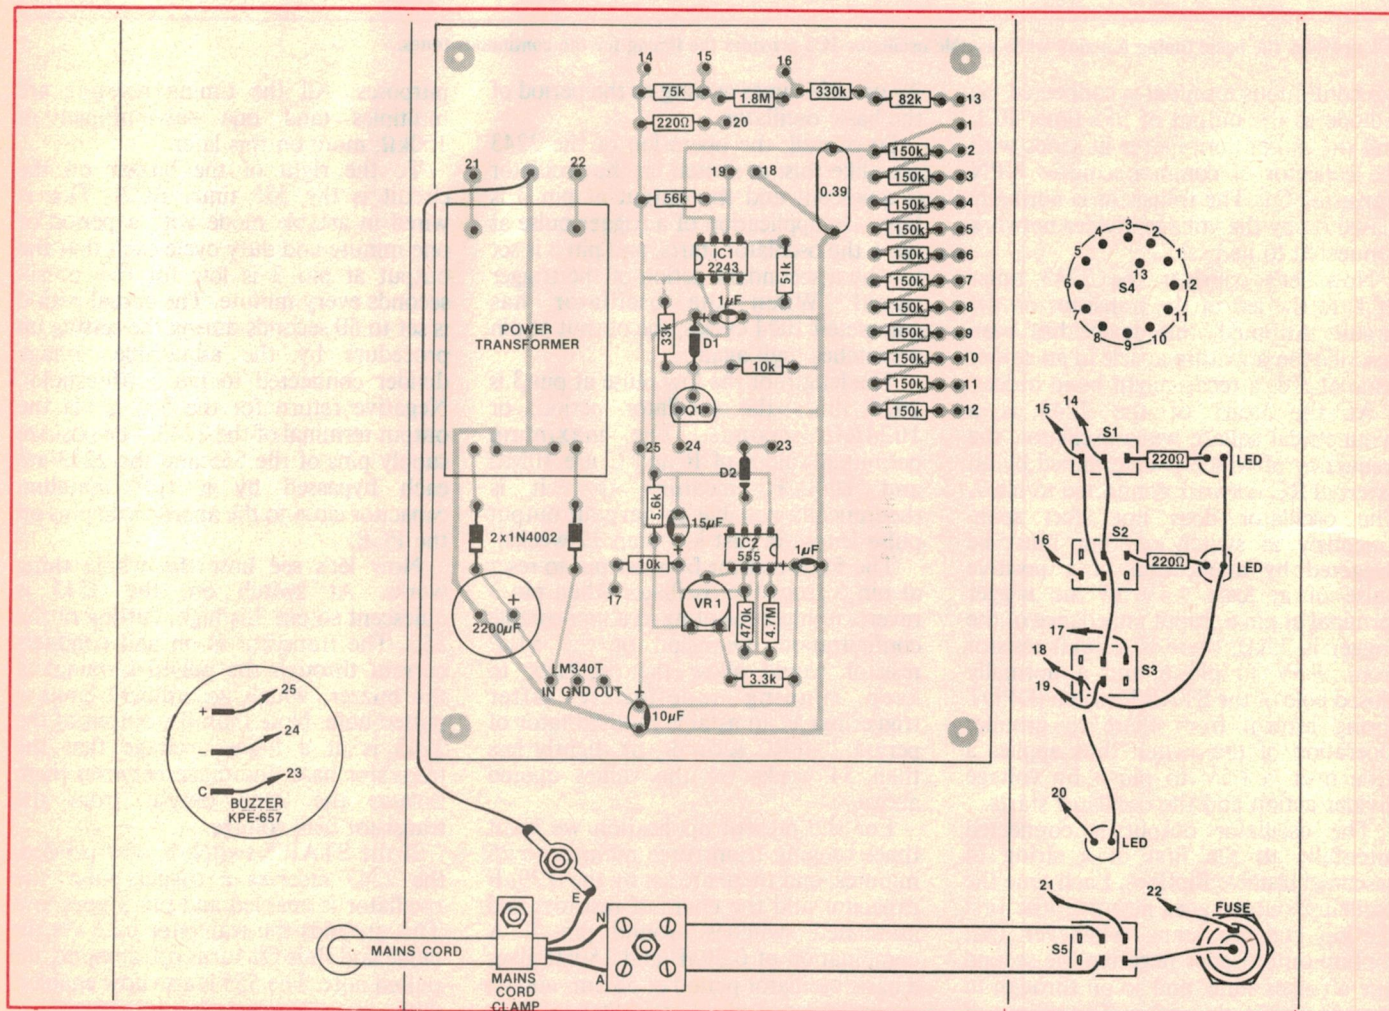

Take care with the mains wiring and sleeve the connections to the power switch (S5) and the fuseholder.

development.

Before describing the 2243 timing network, there are two features of the 555 circuitry which must be explained. First, the diode between the output and the buzzer: it was found at the breadboard stage that, with the 555 cut off and the buzzer pulsing, a direct connection from the 555 output to the buzzer continuous terminal caused a weakening of the pulsed effect, in that the buzzer continued to sound faintly between legitimate pulses. The cause was never pinned down in depth, mainly because nothing was known about the internals of the buzzer circuitry. Inclusion of the diode (D2) was the "fix".


Secondly, there is the 10k Ω resistor connected to +Vcc via the second pole of the START switch and to pin 6 of IC2. A characteristic of the 555 is that, in the astable mode, the charge on the timing capacitor on pin 6 swings between $\frac{1}{3}$ and $\frac{2}{3}$ Vcc. Whenever it reaches $\frac{2}{3}$ Vcc, the output switches low. The capacitor then discharges to $\frac{1}{3}$ Vcc, the output pin 3 goes high and the cycle repeats.

However, when the device is first switched on, the charge on the capacitor is zero, and it has to charge from zero to $\frac{2}{3}$ Vcc before the first output low appears. From there on, it operates normally. The time taken for the timing capacitor to charge from 0V to $\frac{2}{3}$ Vcc is about 1½ times that taken to move from $\frac{1}{3}$ to $\frac{2}{3}$ Vcc so that, in our particular case, that first low comes along about 20 to 25 seconds late. All the subsequent lows will be the correct distance apart, but delayed with reference to the starting time.

The answer to the problem is to "fast-charge" the 15 μ F capacitor, via the 10k Ω resistor and the second pole of the START switch, simultaneously with the triggering of the 2243 and enabling of the 555. When the START switch is operated, the capacitor charges to $\frac{2}{3}$ Vcc in less than half a second and the 555 gives a low output pulse almost immediately. Thus, the buzzer sounds right at the start, to be succeeded by further tones at the requisite one minute intervals.

Turning to the 2243 timing network, let us consider the range of times provided and the justification for the choice. Literature from Kodak and Ilford shows that for most popular combinations of film, developer, and various dilutions thereof, development times can range from three minutes to around 24 minutes. Here and there an odd half minute is added to whole numbers of minutes. For example, for Ilford Pan F film and Ilford ID-11 developer diluted 1:1 with water, the recommended time is 8½ minutes.

So the shortest time provided by the

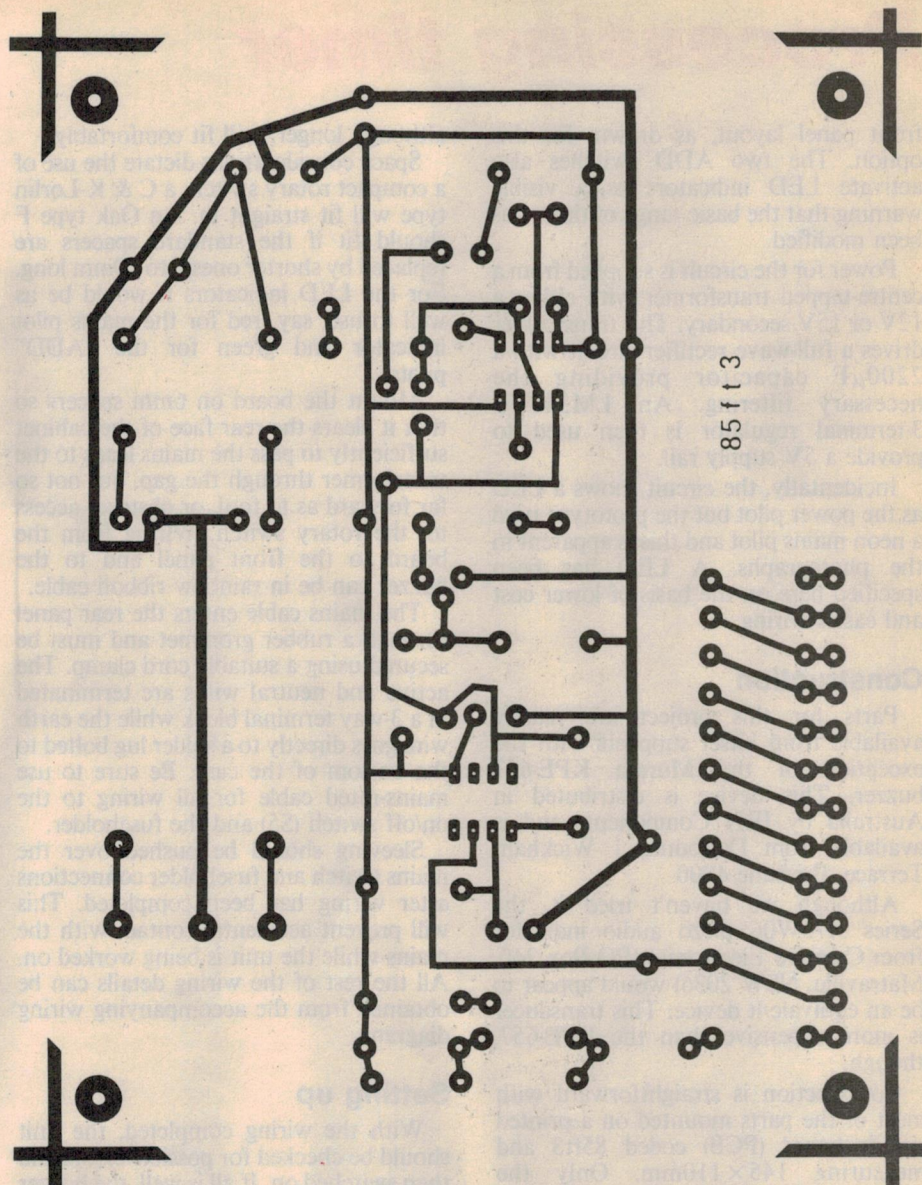

Here is an actual size reproduction of the printed circuit artwork.

12-position switch is three minutes, as set by the 330k Ω and 82k Ω resistors (in series and permanently in circuit) in combination with the 0.39 μ F timing capacitor. Now $412\text{k}\Omega \times 0.39\mu\text{F} \times 1024$ gives 2¾ minutes; not three minutes. This is a deliberate "error", and was arranged to allow for reaction time and the time needed to get the leak-proof cap off the developing tank at the end of the process.

It was found by experiment that 15 seconds was a good safety margin to allow even inexperienced operators to prepare for decanting in an unhurried, panic-free fashion. Intending constructors who wish to opt for the full 3 minutes should substitute 270k Ω and 180k Ω (=450k Ω) for the 330k Ω and 82k Ω resistors.

Following on from position 1 of the switch, each subsequent position adds 150k Ω to the chain, and hence one minute to the time, up to position 12

which gives 14 minutes. The 15 seconds "error", if built in, will be consistent for the entire range of selectable times. That is to say, the buzzer will revert to its beeping mode at "n" minutes minus 15 seconds.

To go beyond 14 minutes, throwing the ADD 12 MIN toggle switch S2 adds a further "twelve-minutes-worth" of resistance, or 1.8M Ω , to the chain; thus the rotary switch now covers the range 15 to 26 minutes. Operating the ADD 30 SEC switch (S1) switches in an extra 75k Ω to add half a minute to any whole number of minutes selected. Thus we end up with a selection of times from three to 26½ minutes at half minute increments.

If, for any reason, it is desired to have quarter minute increments, it would be necessary to arrange for a third toggle switch to add a parallel pair of 75k Ω resistors to the series chain. There is no provision on the PCB pattern or the

Processing timer

front panel layout, as drawn, for this option. The two ADD switches also activate LED indicators as a visible warning that the basic range of times has been modified.

Power for the circuit is supplied from a centre-tapped transformer with either a 12V or 15V secondary. This transformer drives a full-wave rectifier circuit with a 2200 μ F capacitor providing the necessary filtering. An LM340T-5 3-terminal regulator is then used to provide a 5V supply rail.

Incidentally, the circuit shows a LED as the power pilot but the prototype used a neon mains pilot and this is apparent in the photographs. A LED has been specified here on the basis of lower cost and easier wiring.

Construction

Parts for this project are readily available from kitset suppliers with the exception of the Murata KPE-657 buzzer. This device is distributed in Australia by IRH Components and is available from Delsound, 1 Wickham Terrace, Brisbane 4000.

Although we haven't tried it, the Series X73W06 piezo audio indicator from Creative Electronics (PO Box 240, Matraville, NSW 2036) would appear to be an equivalent device. This transducer is more expensive than the KPE-657, though.

Construction is straightforward with most of the parts mounted on a printed circuit board (PCB) coded 85ft3 and measuring 145 \times 110mm. Only the hardware, the LEDs and a couple of resistors are on the front panel, while the buzzer mounts on the rear panel. Mount the smaller parts on the PCB first before moving on to the voltage regulator, main filter capacitor (2200 μ F) and the transformer. Use PC stakes to terminate all external connections.

Once construction of the PCB has been completed, attention can be turned to the case. Drill all relevant holes in the base and rear panel first. The buzzer requires a round hole of 27mm diameter; for those who still have such things, a 1 $\frac{1}{8}$ inch hole punch as used for old style valve sockets would do the trick nicely.

Next, fix the front panel label and use it as a template for the front panel holes. Quarter inch (6.35mm) holes are needed for the toggle switches and LED mounts and a 3/8-inch (10mm) hole for the rotary switch; the hole size for the fuseholder depends on the fuse type chosen. The prototype used a "OO" or M58 type, but the more usual 3AG size holder,

although longer, will fit comfortably.

Space considerations dictate the use of a compact rotary switch; a C & K-Lorlin type will fit straight in. An Oak type F should fit if the standard spacers are replaced by shorter ones 6 to 10mm long. For the LED indicators it would be as well to use, say, red for the mains pilot indicator and green for the "ADD" pilots.

Mount the board on 6mm spacers so that it clears the rear face of the cabinet sufficiently to pass the mains leads to the transformer through the gap, but not so far forward as to foul, or obstruct access to, the rotary switch. Wiring from the board to the front panel and to the buzzer can be in rainbow ribbon cable.

The mains cable enters the rear panel through a rubber grommet and must be secured using a suitable cord clamp. The active and neutral wires are terminated in a 3-way terminal block while the earth wire goes directly to a solder lug bolted to the bottom of the case. Be sure to use mains-rated cable for all wiring to the on/off switch (S5) and the fuseholder.

Sleeving should be pushed over the mains switch and fuseholder connections after wiring has been completed. This will prevent accidental contact with the mains while the unit is being worked on. All the rest of the wiring details can be obtained from the accompanying wiring diagram.

Setting up

With the wiring completed, the unit should be checked for possible errors and then switched on. If all is well, the buzzer should immediately start beeping. Use your multimeter to check that the regulator output is at +5V, then operate the START switch and confirm that the buzzer emits a continuous tone of about five seconds duration.

This tone should be repeated at approximate one minute intervals until the end of the selected time interval, after which the buzzer should resume beeping. If everything checks out, adjust trimpot VR1 so that the continuous tone occurs at accurate one minute intervals (somewhere between 59 and 61 seconds is good enough).

Assuming that 1% resistors have been used in the timing network of the 2243, accuracy of the total developing time will depend on the 0.39 μ F capacitor. Ideally, this capacitor should be a 1% type, but these are expensive and can be difficult to obtain. In practice, a 10% type will probably be close enough to its nominated value to give reasonable accuracy.

The alternative is to sort through a

PARTS LIST

- 1 instrument case, 205 \times 65 \times 130mm, K&W type C853
- 1 PCB, code 85ft3, 145 \times 110mm
- 1 buzzer, Murata type KPE-657 or equivalent (see text)
- 1 mains transformer, 12V or 15V CT; Ferguson PL 12/5VA, PL15/5VA; Arlec AL7VA/12, AL7VA/15
- 1 Scotchcal front panel label, 198 \times 57mm
- 1 pointer knob
- 1 fuseholder and 500mA fuse
- 1 mains cord and plug
- 1 mains cord grommet
- 1 mains cord clamp
- 1 3-way mains terminal block
- 4 6mm tapped spacers
- 1 solder lug
- 1 SPDT miniature toggle switch
- 2 DPDT miniature toggle switch
- 1 DPDT miniature toggle switch, spring return
- 1 single pole, 12-position rotary switch
- 3 LED mounting bezels
- 4 rubber feet

Semiconductors

- 1 XR2243 timer IC
- 1 555 timer IC
- 1 LM340T-5 3 terminal regulator
- 1 BC548 NPN transistor
- 2 1N4002 silicon diodes
- 2 1N914 silicon diodes
- 1 5mm red LED
- 2 5mm green LEDs

Capacitors

- 1 2500 μ F 16VW PC electrolytic
- 1 15 μ F 16VW tantalum
- 1 10 μ F 16VW tantalum
- 2 1 μ F 16VW tantalum
- 1 0.39 μ F polyester, see text

Resistors (0.25W, 5%)

- 1 \times 4.7M Ω , 1 \times 470k Ω , 1 \times 56k Ω , 1 \times 33k Ω , 2 \times 10k Ω , 1 \times 5.6k Ω , 1 \times 3.3k Ω , 3 \times 220 Ω , 1 \times 1k Ω miniature horizontal trimpot

Resistors (0.25W, 1%)


- 1 \times 1.8M Ω , 11 \times 150k Ω , 1 \times 330k Ω , 1 \times 82 Ω , 1 \times 75k Ω , 1 \times 51k Ω

Miscellaneous

Ribbon cable, mains rated cable, machine screws and nuts, solder.

handful of 0.39 μ F capacitors until you find one within 1% of the required value. Don't forget that the timer starts beeping 15 seconds short of the selected period to allow time for the developer to be poured from the tank. Thus, when the three-minute position is selected, the buzzer should start beeping after two


FILM PROCESSING TIMER

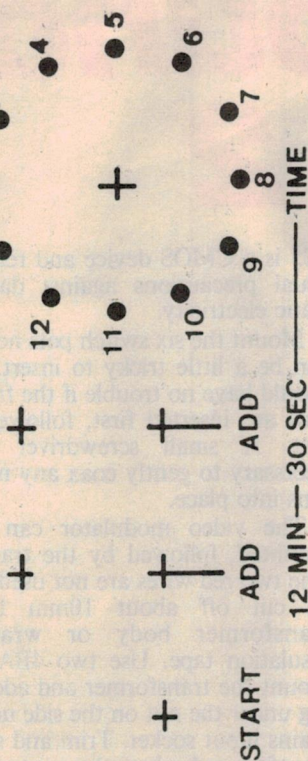

This front panel artwork can be photocopied or used to produce a Scotchcal panel.

minutes and 45 seconds.

Finally, the photographs show a pushbutton for the START switch, whereas the parts list specifies a spring-return toggle switch. Experience with the original unit suggests that a toggle switch would be easier to use because of the light weight of the unit.

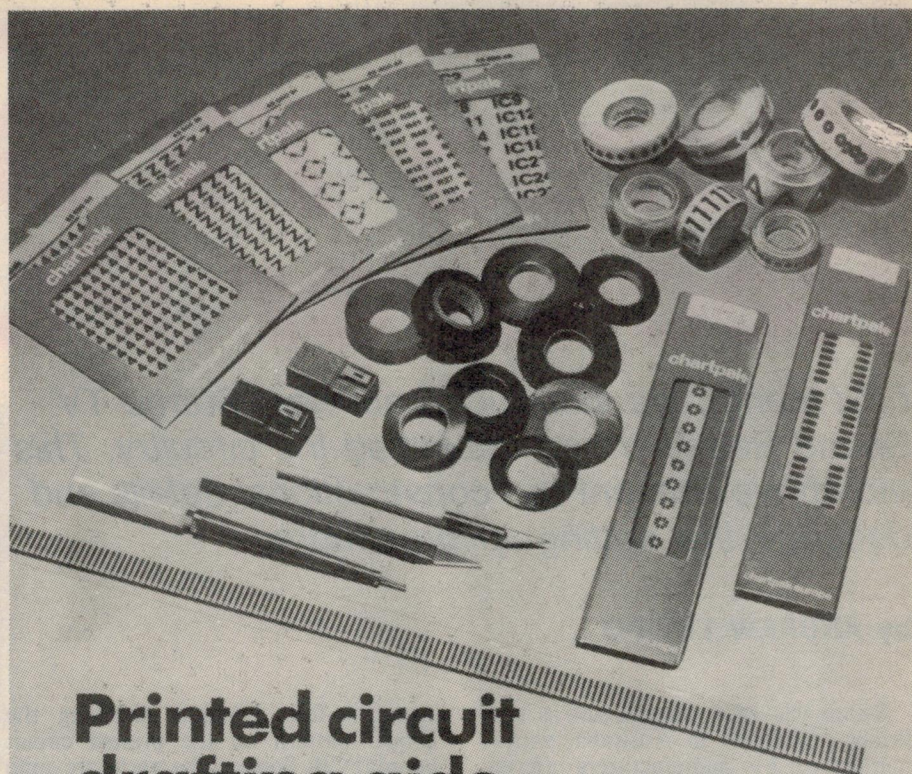


Printed circuit drafting aids

Get bang up to date with our extensive range. Phone us today and get your new Chartpak catalogue, it's full of new products, as well as all the old favourites.

KELLERGRAPHICS

493-495 Kent St, Sydney 2000
Phone: (02) 267 5388

31 Queen St, Melbourne 3000
Phone: (03) 62 6531

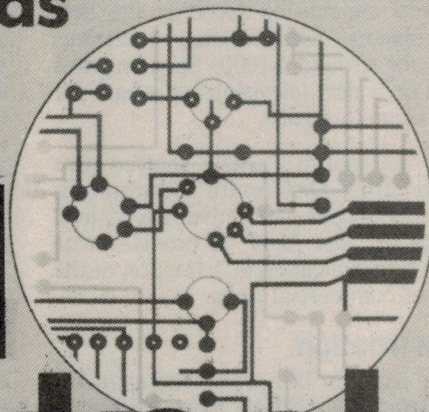


chartpak®

Projects & Circuits

20 top projects from
Electronics Australia

- Audio/video projects
- Power supplies, test equipment
- Mains control projects
- Automotive projects
- 10-year project index

Available from "Electronics Australia", 140 Joynton Avenue, Waterloo, Sydney, 2017. **PRICE \$4.50.** Or by mail order: send cheque to "Electronics Australia", PO Box 227, Waterloo, 2017. **PRICE \$5.40.**

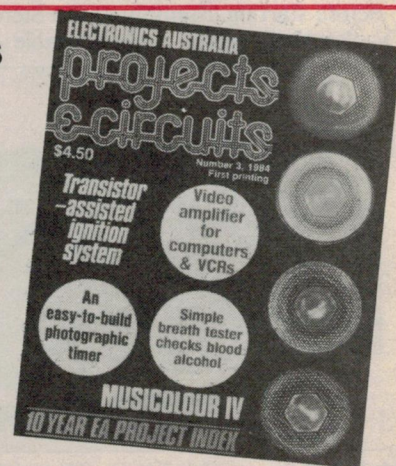

Easy to build unit connects to your hifi

Stereo TV Sound Receiver Pt. 2

Last month, we introduced our new Stereo TV Sound Receiver and described the circuitry. This month we present the constructional details and describe the setting-up procedure.

by **ANDREW LEVIDO**

Stereo television transmission is now firmly established in Australia, with a number of TV manufacturers offering receivers capable of decoding the new transmissions. Unfortunately, these sets retail for around \$1000. Spending this much on a new television set is hard for most of us to justify.

As last month's article showed, this receiver from Dick Smith Electronics is an economically attractive alternative. Selling for just \$249, it provides true stereo sound facilities at a fraction of the price of commercial units.

Construction

The parts for this project are available only from Dick Smith Electronics as a kit. This comes complete with all parts necessary for the assembly of the receiver, including the prealigned tuner module and a plastic front panel with white lettering on a black background. A comprehensive instruction manual will be included.

Before starting assembly of the Stereo TV Sound Receiver it is advisable to

spend a few moments checking the copper pattern on the printed circuit board (PCB). Some of the tracks are quite close together, and short circuits can easily develop during the manufacturing process. The time spent checking for this and other faults in the copper pattern is time well invested, as anyone who has tried to trace a fault of this type in a completed PCB can testify.

Commence assembly by installing the PC pins and wire links on the circuit board. Follow this with the other components, beginning with the resistors and then moving on to the capacitors, ceramic resonators and semiconductors. It is a good idea to mount the resistors with their colour bands all facing in the same direction. This will make checking easier later on.

The LEDs should be mounted about 12mm proud of the board. Leave the tuner module and the transformer to one side at this stage.

Take the usual precautions with the polarised components, particularly the semiconductors which are unlikely to survive incorrect mounting. Note that

IC5 is a CMOS device and requires the usual precautions against damage by static electricity.

Mount the six switch pots next. These can be a little tricky to insert, but you should have no trouble if the front three pins are inserted first, followed by the rest. A small screwdriver may be necessary to gently coax any misaligned pins into place.

The video modulator can now be mounted, followed by the transformer. The two red wires are not used, and can be cut off about 10mm from the transformer body or wrapped in insulation tape. Use two 4BA bolts to mount the transformer and add a solder lug under the nut on the side nearest the mains input socket. Trim and solder the transformer leads to the appropriate pins on the board.

A piece of barrier insulation material is included in the kit and is used to insulate those portions of the board which carry dangerous voltages. This material must be cut into two pieces.

One piece is mounted on the copper side of the board and is used to insulate the copper tracks to the mains switch. The other piece is much smaller and is used to insulate the top of the mains switch (see inside photograph). Note that the pins protruding from the top of the mains switch must be trimmed to about 2mm. The barrier insulation material is held in place by two plastic cable ties as shown in the photographs.


The tuner module comes with two pieces of screened cable attached. The smaller piece must be desoldered from the PC pins and reconnected to the module, inside the small shielded box. Remove the lid of this box and locate the vacant hole in the printed circuit board next to the 560Ω resistor. Note that it is the hole nearest the BF199 transistor.

Solder the centre conductor of the screened cable to this point, and the screen to the inside of the metal box. Feed the cable out through one of the holes in the side of the box and replace the lid. The longer screened cable should be connected to the pair of PC pins on this board nearest the black 3-pin socket.

Use three 6BA screws to mount the tuner module onto the main board — the



This is how the completed stereo TV sound receiver looks.



Next, mount all the rear panel hardware, including the two 180Ω resistors which solder directly to the headphone socket terminals. The two multipole switches and the poten-

tiometer can then be mounted on the front panel and the wire links fitted to the mode select switch.

Final assembly

Slip the front panel over the six pot shafts, position the two LEDs, then install the entire assembly in the bottom of the case. 4BA nuts are used as spacers between the plastic mounting pillars and the PCB. Screw the board down using the long self-tapping screws supplied. Don't forget to include an extra nut between the main board and the tuner

board in the back left hand corner of the case.

Now for the mains wiring. Push the mains cable through the grommet in the rear panel, fit the mains cable clamp and terminate the active and neutral leads in the insulated terminal block. The earth wire must be soldered to the lug under the transformer mounting screw.

The rear panel can now be slotted into position and the mains cable pulled back through the entry grommet to take up the slack. All that remains now is to complete the internal wiring.

Stereo TV

Follow the wiring diagram closely, especially in regard to the earthing system used. Failure to do this could result in earth loop problems. Shielded cable is used for all audio output connections, while ribbon cable is used for wiring to the switches and the pot.

Construction is now complete. Check your work thoroughly before moving on to the setting-up procedure. Pay particular attention to the mains wiring — mistakes could be lethal.

Setting up procedure

Plug the receiver in and connect an antenna and a television set. Connect the audio line outputs to your hifi amplifier or plug in a pair of headphones. If you are using the video modulator, tune the TV set to channel 1.

Switch on, set the channel selector switch to position 1 and select the band that you wish to assign to this position. The appropriate station can now be tuned by adjusting the corresponding multi-turn pot.

The first adjustment that may be necessary is the level of signal into the modulator. All you have to do is adjust VR2 for best picture. Note that it may be necessary to adjust VR2 in conjunction with the tuning pot. In some cases, it may also be necessary to adjust the fine tuning control on the TV receiver.

You can now set the other five multi-turn pots to receive the remaining channels.

Now tune to a station which is transmitting in stereo (eg, Channel 7 or 9 in Sydney) and check that the stereo LED lights. If all is well, switch the mode selector switch to the stereo position and check for stereo sound. Adjust VR1 for maximum apparent stereo separation.


The pot should be set somewhere near the centre of its travel.

The only other adjustment which may need to be made is to coil L1 in the quasi-split sound circuit. Use a non-ferrous alignment tool to tweak this coil for minimum distortion in the sound. This adjustment is not critical.

All other adjustments on the tuner module and the modulator should be left alone. These adjustments are all preset during manufacture.

This completes the construction of the Stereo TV Sound Receiver. All that is left to do is to put the lid on the case and to enjoy the added realism that stereo sound can bring to your television viewing.

Footnote: two minor changes have been made to the circuit last month. The $33\mu\text{F}$ capacitor on the base of the Q4 has been increased to $47\mu\text{F}$, while the $47\mu\text{F}$ capacitor on the video output socket has been increased to $100\mu\text{F}$.

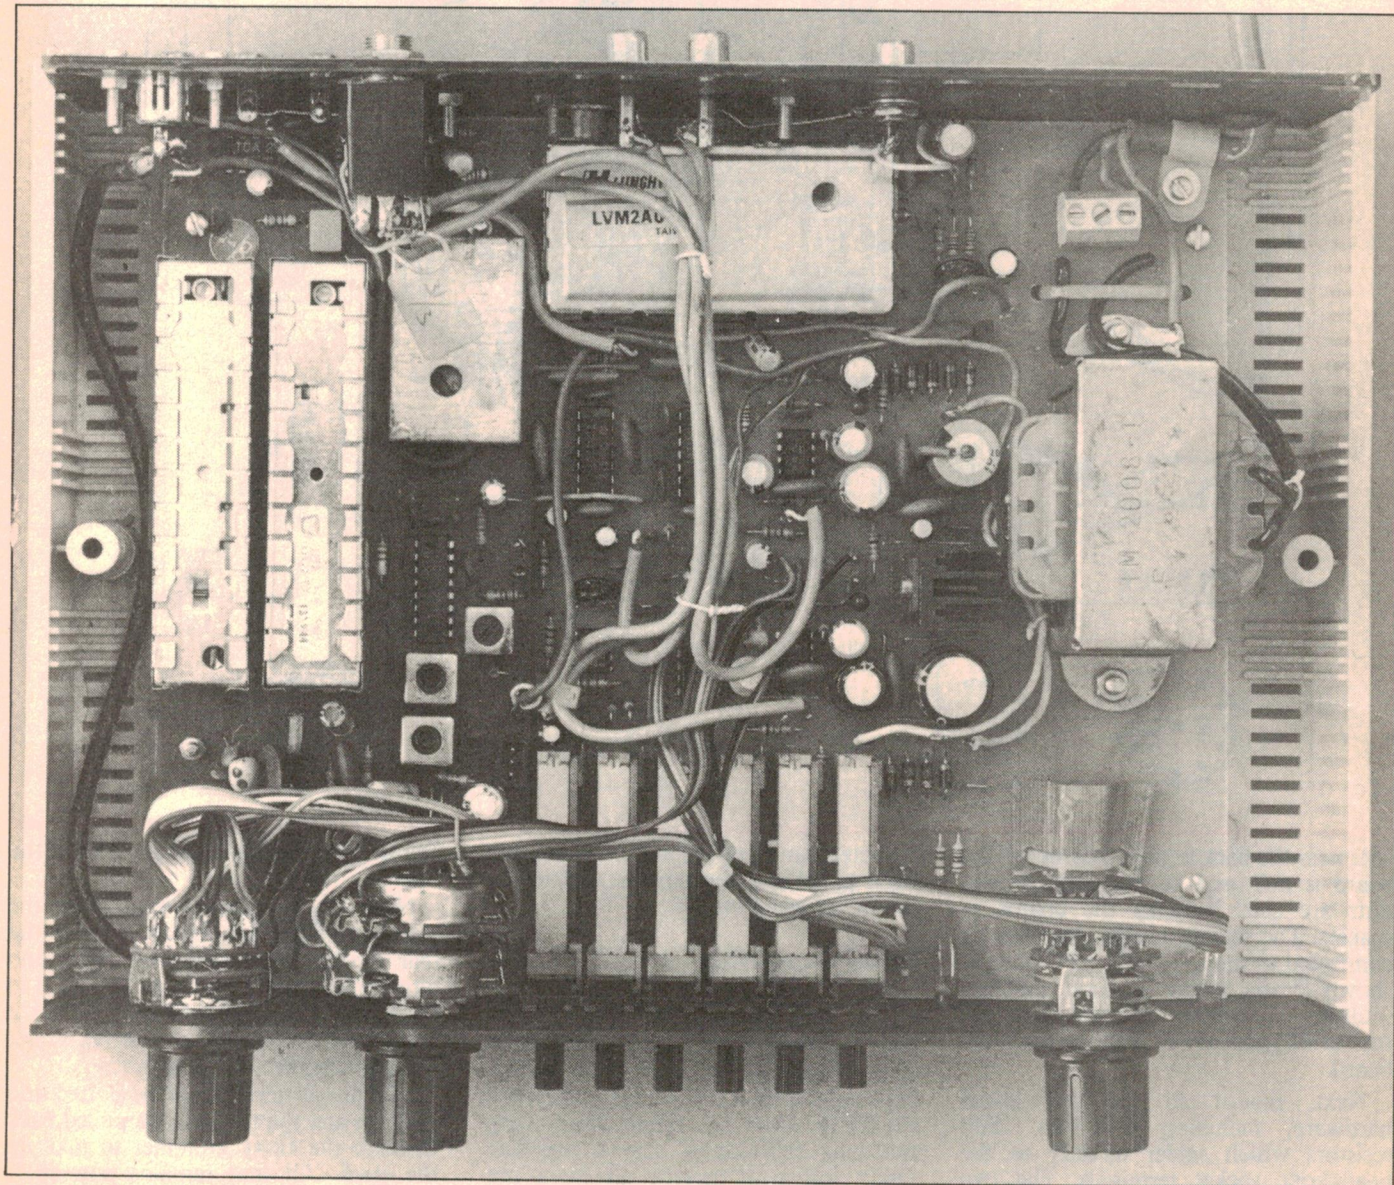

This photograph shows the inside of the completed unit. The two metal cans on the left are the prealigned tuners.



\$525⁰⁰ EX TAX **INC**
\$619⁰⁰ INC TAX **PROBES**

**Compact and easy to operate for
hobbyists and professionals**

- 5mV/div sensitivity
- Hold-Off function
- CH1, CH2, Dual, Add, X-Y modes
- Intensity modulation
- 0.2uS to 0.5S/div sweep range

Latest National Data Books in Stock

1984 DATA CONVERSION BOOK

Thirteen chapters cover A to D's and D to A's, DVM's, Analog Switches, Active Filters, Amplifiers, Sample-Holds, Successive Approximation Registers, Voltage References etc. 4.5cm thick! **\$15.00** (P&P \$2.00).

1984 LINEAR SUPPLEMENT

To be used in conjunction with your 1982 Linear Data Book, 16 sections list all the latest amps, regulators, converters etc. Complete index includes all of the devices in both books. If you haven't got the 1982 Linear Book get both. Each volume **\$9.50** (P&P \$2.00).




XR-082CP	1.72
XR-083CP	2.35
XR-084CP	2.78
XR-1310CP	2.00
XR-14412VP	8.31
XR-2201CP	1.66
XR-2202CP	1.66
XR-2203CP	1.66
XR-2204CP	1.66
XR-2206CP	8.19
XR-2209CP	4.55
XR-2211CP	6.84
XR-2240CP	3.02
XR-4739CP	2.00
XR-5533AP	3.61

EXAR DATA BOOK


Over 500 pages give you everything you need to know about the Exar range of PLL's, Tone Decoders, Filters, Modems, Timers, Computer Circuits, Function Generators, Op Amps, Regulators, Drivers and Special Function Circuits **\$10.50** (P&P \$2.00).

OPEN FRAME, LOW PROFILE
FEATURE IC SOCKETS

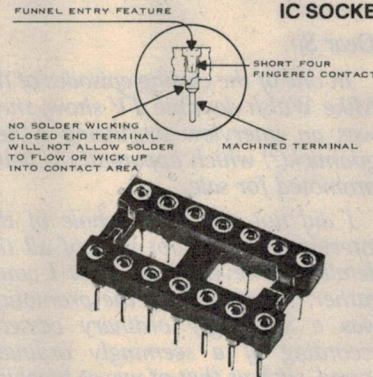


Highest quality glass filled polyester with MACHINED contacts. Four finger GOLD PLATED contact. Terminals are tin plated for easy soldering. Open frame ensures good cooling, easy cleaning and checking. Available in 8 to 40 pin configurations.

8 pin **\$6¢**, 14 pin **98¢**, 16 in **\$1.12**, 18 pin **\$1.26**,
20 pin **\$1.40**, 24 pin **\$1.68**, 28 pin **\$1.96**,
40 pin **\$2.80**.

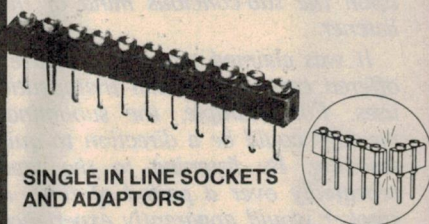

SIP sockets feature four finger GOLD PLATED beryllium copper contacts with tin plated brass terminals. 20 pin strip can be easily snapped apart to form shorter lengths. Maintains spacing when mounted end to end or end to side. Socket strip **\$2.50**. Adaptor strip **\$2.00**.

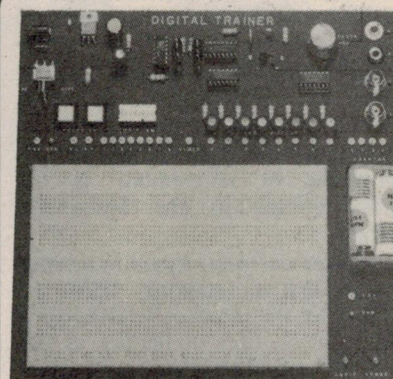



DIGITAL LOGIC TRAINER/BREADBOARD

Ideal for breadboarding and digital circuit experimenters. Runs from a plug-pack or four pen cells. Incorporates two bounce-free pulse switches, 8 logic level (DIP) switch, a breadboard with 1580 interconnected points, eight buffered LEDs, two adjustable clock rates 10-40Hz and 1kHz-20kHz.

AT301 LOGIC PROBE

Checks TTL and CMOS circuits

- Multi-LED readout
- Memory function for single shots and low rep events • 50nS detectable pulse width
- 10MHz max input
- Overload protected
- Runs off 5-15V, 25-40mA



8.30 to 5 Monday to Friday, 8.30 to 12 Sat.
Mail Orders add \$3.00 to cover postal charges.
Next day delivery in Sydney add \$5.00.

All prices INCLUDE sales tax.

Tax exemption certificates accepted if line value exceeds \$10.00

GEOFF WOOD ELECTRONICS PTY LTD

Incorporated in N.S.W.

656A Darling St, Rozelle 2039
(One door from National Street)

Tel: **810 6845**



\$10.00 minimum

specialising in electronic components for the professional and hobbyist.

Kick bad habits with subliminal messages!

You lose your temper, you smoke too heavily, you drink and drive, you even beat your wife occasionally? What a boon if you could change all that by simply buying a subliminal message cassette to play in your car or elsewhere, and have it "turn over a new leaf" for you, while you listened! Impossible? Well, read on:



FORUM

Conducted by Neville Williams

In case you haven't caught up with this intriguing but not-so-new idea, a subliminal message is one that is introduced into otherwise routine audio or video material, surreptitiously and in such a way that the listener or viewer is not actively aware of it. However, the message is supposed to penetrate his/her sub-conscious mind and to influence them in some calculated manner.

"Operating below the threshold of consciousness or perception" is the definition quoted in the Macquarie Dictionary.

The matter has been raised in a letter from a resident of Gulgong, NSW. As you will note, the incident referred to is now as much a part of history as the Mike Walsh daytime TV show but, as sometimes happens, it could not be dealt with at the time because of other commitments. However, as the writer remarks, the subject may be one "to muse over during a coffee break". Better still, it might even start a few friendly arguments!

I suggest you read the letter now, as set out in the accompanying panel.

First off, I'm certain that H.N. wasn't dreaming, because I also caught part of that interview, or one very like it. (They tend to double-up on rival talk shows.) If he needs still further assurance, I was no more convinced by the whole thing than he was!

I'm not quite sure when I first encountered the idea of subliminal messages, as such, although I certainly do remember writers, performers and others, who used to conceal crudities in their work, primarily to take the mickey out of their "establishment" bosses.

I remember, for example, a full-page advertisement (as I recall) in an early issue of "QST" magazine, in which part of the message was displayed as a simulated article heading, followed by a block of supposedly meaningless scribble, in lieu of text. But, much to the dismay

Subliminal sound: what are the wild waves saying?

Dear Sir,

In one of the closing episodes of the Mike Walsh daytime TV show, there was an interview discussing a new gimmick(?) which apparently is being promoted for sale.

I did not catch the whole of the interview, so I'm not sure of all the details. However, from what I could gather, the subject of the promotion was a seemingly ordinary cassette recording of a seemingly ordinary sound, such as that of waves breaking on the beach. But (would you believe?) a so-called "subliminal message" had been added. The nature of the subliminal message was not made clear but, whatever it was or is, it's supposed, somehow, to impress itself upon the sub-conscious mind of the listener.

It was claimed that this "feature" offered certain potential therapeutic uses. For example, the subliminal message could be a direction to quit smoking. By listening to the tape repeatedly over a period of time, a smoker would apparently experience a diminishing urge to smoke and may eventually stop altogether.

Other cassettes might contain quite different messages and you would simply select the one you need at the time, based on the labelling.

When asked how one could be sure that the right message was imprinted on the particular tape, the interviewee explained that there was no physical way of finding out (presumably electronically or otherwise) and one

had to accept on trust what the label said.

Now that makes me really sceptical. If it is possible to record electronically something which is capable of being absorbed by the conscious or unconscious mind, then it should surely be possible, by electronic means, to detect or decode such recording. How could such subliminal messages be recorded in the first place?

If the claims are not technically sound, the public should be made aware of the situation and some legal restraint placed on the sale of the cassettes.

If, on the other hand, they are legitimate, then, surely, they should be capable of substantiation.

Again, if it is true that people can be influenced subliminally by listening to specially made tape recordings, without being aware of it, I see no reason why the same thing should not be done by radio or television. The possibilities become mind boggling.

Personally, I'm far from convinced by the whole proposition — that is, unless I was dreaming, or failed completely to understand the interview in question.

I'd be most interested in your views via the pages of EA unless, of course, you consider the whole subject too far-fetched for serious comment. On the other hand, it may be something to muse over during a coffee break!

H.N. (Gulgong, NSW).

of the publishers, when a curious reader had a look at the "scribble" through a magnifying glass, it turned out to be none-too-genteel comment on the U.S. President and his Administration. There were red faces all around.

Then there was the cartoonist for a major Sydney newspaper, who amused himself and a section of his fans by thinking up ways to hide subtle crudities in his drawings, in the hope that they would escape the notice of the sub-editors and be duly published.

And, of course, there have been apocryphal stories about pop groups and producers burying crude suggestions in their master recordings, which would go unnoticed unless you played them at double speed, or backwards, or something!

But there was nothing "subliminal" about any of those exercises; they were essentially games of hide-and-seek!

However, considerable apprehension did arise, some years ago, in respect to the possible use — and abuse — of deliberate subliminal messages, flashed briefly, for example, on to cinema or television screens. Exposure would be too short for the messages to be consciously read or noticed, but long enough — it was said — to register on the sub-conscious mind.

In consequence, viewers' ideas and attitudes might be manipulated without them being aware of it. At least, that was the theory, much debated but, I doubt, ever convincingly demonstrated.

It was never quite clear as to how the surreptitious additions to the main image would be organised. Conceivably, a message could be added to the requisite number of frames in a film or tape but such tampering would be unlikely to go unnoticed for long. Sooner or later, somebody would be sure to "blow the whistle"!

Alternatively, it would be technically possible to superimpose something on the screen by other means but, again, the activities of a deliberate video "flasher" would soon attract attention.

Much the same situation obtains in the audio sphere. People have long expressed apprehension about subliminal messages buried in our audio fare and speculated as to how it might be accomplished. But we are still waiting for documented examples of the practice and evidence that it has or has not proved effective.

The fact that someone has now claimed on a TV talk show to have tapes carrying subliminal messages, and that they have potential therapeutic merit is not, in itself, proof of their validity.

I must agree with H.N.'s proposition that if, by electronic means, one can implant a meaningful message on audio tape, it should be possible, also by

MUSIC SOUND RECORDING STAGE LIGHTING

SONICS

REGULAR TONICS

for musicians, home studio fanatics, road crews, recording engineers, lighting people, managers, promoters, producers . . .

interviews, reviews, techniques, news



DON'T MISS OUT!

**ORDER YOUR COPY NOW FROM YOUR LOCAL
NEWSAGENT OR MUSIC RETAILER — OR SUBSCRIBE.**

Published by the Federal Publishing Company, 140 Joynton Ave,
Waterloo NSW 2017; (02)663-9999.

CASHMORE SOUND SYSTEMS PTY. LTD.

HIRE—SALES—INSTALLATION—SERVICE —SOUND SYSTEMS—DISCO'S—LIGHTING



ROPE LIGHT KITS

\$90

6 colours, 30ft



PINSPOTS


\$35

FOG MACHINES & CANISTER



\$280

STAGE CONTROLLERS (CHASER)

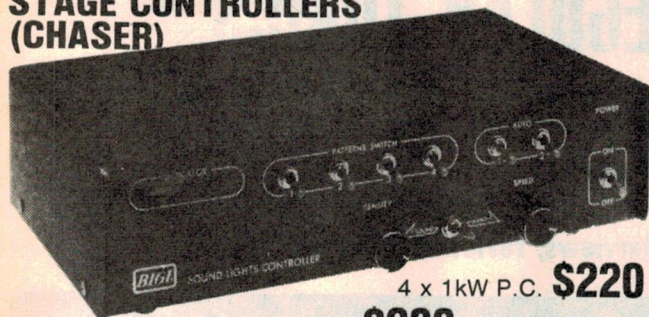

4 x 1kW P.C. **\$220**
4 x 2kW P.C. **\$290**

LARGE STRAP HANDLES


\$1.30

DISCO MXR From \$240—\$700




200 WATT RMS MOSFET

\$240



MIRRORBALLS

12" to 36"

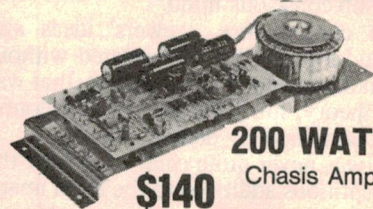


200 WATT Chasis Amp

\$140

6 ARM SPINNERS




\$260




H/D LIFT OFF HINGES

\$2.20



CORNERS

.45c



PLASTIC 6.5m mono stereo

\$1.05




6.5MM HD PLASTIC

mono **.95c**

MALE CANON

\$2.20



F/MALE CANON

\$4.50

OFFICE/SHOWROOMS: 354 LIVERPOOL ROAD, ASHFIELD 2131
TELEPHONE: (02) 798-6782 — TLX: AA74549

FORUM — continued

electronic means, to at least detect the presence of that message and, hopefully, to decode it as well.

The fact is that magnetic tape is a very familiar record/playback medium, and one that has been the focus of worldwide research for more than 50 years, in the context of audio, video, information and data storage, etc, both analog and digital. You name it and it's been recorded on and recovered from magnetic tape!

More than that, scientists and engineers involved in space research have built up a high order of basic expertise in identifying, isolating, enhancing and interpreting coherent information buried in all manner of noise.

It just doesn't add up that a "message" which defies detection, by such technology, or by deliberate listening, can still be sufficiently accessible and lucid to register on the sub-conscious.

If we're wrong about all this and there really is substance in the subliminal, the implications are, indeed, "mind boggling" — not so much for the person who

knowingly buys an anti-smoking cassette but, rather, for those who are subjected to influences that they are totally unaware of.

Keeping up with CDs

Turning to a somewhat less nebulous subject, a reader from Kingston Beach, Tasmania, seeks guidance in facing up to the implications of compact discs, with their impressive specifications, including that 96-odd dB of dynamic range and S/N ratio.

He has been a reader of the magazine for around 30 years but says that he particularly appreciated the "Forum" article in the February '84 issue dealing with the subject: "Human ears, compact discs, dynamic range and all that!" He continues:

Most would agree that the quality of signal available from a CD player would be wasted on a 2x5W stereo system driving a pair of 10cm loudspeakers. But what about my Sansui amplifier, which has a quite typical output of 40W RMS per channel with 0.06% THD? Phono S/N ratio is quoted as 76dB and AUX ditto 95dB.

Would gear with this level of performance be able to "deliver the goods" or should I scrap the lot and go for a system with 100W per channel

output and a S/N ratio of 100+dB?

In putting the question, I am also considering the situation when my existing (high quality) FM tuner, with a S/N ratio of 72dB in stereo mode, processes the broadcast of a CD record. I must say that, even though the dynamic window may not be as wide as it should be, the system still manages to produce a very acceptable sound. Is this the best I can expect at present off-air, or could things be further improved? (A good antenna, etc is assumed.)

Also, what can one expect when a CD signal or an FM/CD broadcast is fed into one of the new breed of open-reel decks, which claim a S/N ratio of 100dB or so? Would silence still reign supreme or would other nasties raise their heads?

Finally the loudspeakers: Would my Polk Monitor loudspeakers (or others of similar quality) be able to reproduce the full range of the CD signal, provided it survived all earlier obstacles. (The makers of Polk loudspeakers claim a max. output level of 105dB for my model.)

I'm sure your readers would be interested to hear reasoned comments on what the lower boundaries of sufficiency are for CD reproduction and, again, what standards would have to be met to do real justice to the signal.

F.B. (Kingston Beach, Tas.)

OUTSTANDING PERFORMANCE ... at safer temperatures!



Choose an approved soldering iron that best suits your needs.

- ☐ **Adcola 'Standard':** for hobbyists and general soldering.
- ☐ **Royel 'Duotemp':** push-button temperature control.
- ☐ **Royel 'Thermatic':** electronic feedback temperature control.
- Light weight, cool handles.
- No transformer required, plug in to 240V.
- Correct heat for Printed Wiring Boards.
- Many tip profiles available for all models.

ADCOLA ROYEL

provides protection against thermal damage to modern circuitry.

**ASK YOUR NEAREST
ELECTRONICS PARTS
SUPPLIER!**

Chosen by
AUSTRALIAN MILITARY SERVICES
& LEADING MANUFACTURERS
WORLDWIDE!

MHL 3035

rie

Rod Irving Electronics

425 HIGH STREET,
NORTHCOTE VICTORIA.
Ph:(03)489 8866 489 8131
48-50 A'BECKETT STREET,
MELBOURNE VICTORIA.
PH:(03)347 9251
Mail Order and
correspondence:
P.O. Box 235
NORTHCOTE 3070

- ★ NEW LOOK
- ★ NEW PRICES
- ★ NEW PEOPLE
- ★ NEW PRODUCTS
- ★ NEW IDEAS

MAIL ORDER
HOT LINE



481 1436

POSTAGE RATES

\$1-\$9.99	\$1.50
\$10-\$24.99	\$2.00
\$25-\$49.99	\$3.00
\$50-\$99.99	\$3.50
\$100-\$199	\$5.00
\$200-\$499	\$7.50
\$500 plus	\$10.00

Certified Post for orders over \$100 included "free"! Registered Post for orders over \$200 included "free"! Account orders from schools Govt. Depts., Public Cos., gratefully accepted. Min. order of \$20. (or a min. \$5 accounting fee will apply.) Comet Road Freight, Airmail etc. are extra.



HAVE YOU BEEN INTO OUR CITY STORE???

Conveniently located on the edge of the city where parking is easy! Over 4,000sq. ft. of an extensive range of products and great "in store" bargains... for those interested in computers we have a wide range on display upstairs. For good advice and a good price, see Rod Irving Electronics.



THE BRILLIANT SERIES 5000 PRICES SLASHED! FOR ONE MONTH ONLY!

By directly importing and a more technically orientated organisation, ROD IRVING ELECTRONICS can bring you these products at lower prices than their competitors. Enjoy the many other advantages of RIE Series 5000 kits such as "Super Finish" front panels at no extra cost, top quality components supplied throughout. Over 1,000 Sold.

For those who haven't that time and want a quality hi-fi, we also sell the Series 5000 kits Assembled and Tested.

SAVE \$60 THIS MONTH ONLY!

POWER AMPLIFIER

WHY YOU SHOULD BUY A "ROD IRVING ELECTRONICS" SERIES 5000 POWER AMPLIFIER.

- ★ 1% Metal Film resistors are used where possible.
 - ★ Aluminium case as per the original article.
 - ★ All components are top quality.
 - ★ Over 1000 of these kits now sold.
 - ★ Super Finish front panel supplied at no extra cost.
- Please note that the "Superb Quality" Heatsink for the Power Amplifier was designed and developed by ROD IRVING ELECTRONICS and is being supplied to other kit suppliers.

SPECIFICATIONS: 150 W RMS into 4 ohms
POWER OUTPUT: 100 W RMS into 8 ohms (±5% SUPPLY)
FREQUENCY RESPONSE: 8 Hz to 20 KHz +0 -0.4 dB 2.8 Hz to 65 KHz +0 -3 dB. NOTE: These figures are determined solely by passive filters.
INPUT SENSITIVITY: 1 V RMS for 100 W output.
HUM: 100 dB below full output (flat).
NOISE: 116 dB below full output (flat, 20 KHz bandwidth).
2nd HARMONIC DISTORTION: <0.001% at 1 KHz (0.0007% on Prototypes) at 100 W output using a ±56 V SUPPLY. Y rated at 4A continues <0.0003% at 10 KHz and 100 W.
3rd HARMONIC DISTORTION: <0.0003% for all frequencies less than 10 KHz and all powers below clipping.
TOTAL HARMONIC DISTORTION: Determined by 2nd Harmonic Distortion (see above).
INTERMODULATION DISTORTION: 0.003% at 100 W (50 Hz and 7 KHz mixed 4:1).
STABILITY: Unconditional.

Cat. K44771 Normally \$339, SPECIAL PRICE \$279
Packing and Post \$10 Assembled & Tested \$499

SAVE \$60 THIS MONTH ONLY!

PREAMPLIFIER

THE ADVANTAGES OF BUYING A "ROD IRVING ELECTRONICS" SERIES 5000 PREAMPLIFIER KIT ARE:

- ★ 1% Metal Film Resistors are supplied.
 - ★ 14 Metres of Low Capacitance Shielded Cable are supplied (a bit extra in case of mistakes).
 - ★ English "Lorlin" switches are supplied (no substitutes here).
 - ★ Specially imported black anodised aluminium knobs.
- Available Assembled and Tested. (We believe that dollar for dollar there is not a commercial unit available that sounds as good.)

SPECIFICATIONS:
FREQUENCY RESPONSE: High-level input: 15 Hz-130 KHz, +0 -1 dB Low-Level input - conforms to RIAA equalisation, ±0.2 dB.
DISTORTION: 1 KHz <0.003% on all inputs (limit of resolution on measuring equipment due to noise limitation).
S/N NOISE: High-Level input, master full, with respect to 300 mV input signal at full output (1.2 V) >92 dB flat > 100 dB A-weighted. KM input, master full, with respect to full output (1.2 V) at 5 mV input 50 ohms source resistance connected >86 dB flat 92 dB A-weighted. MC input, master full, with respect to full output (1.2 V) and 200 uV input signal >71 dB flat >75 dB A-weighted.

Cat. K44791 Normally \$299, SPECIAL PRICE \$239
Packing and Post \$10 Assembled & Tested \$599



THIRD OCTAVE GRAPHIC EQUALIZER

SPECIFICATIONS:
BANDS: 28 Bands from 31.5 Hz to 16 KHz.
NOISE: <0.008 mV, sliders at 0, gain at 0 (-102 dB0).
20 KHz BANDWIDTH DISTORTION: 0.007% at 300 mV signal, sliders at 0, gain at 0; maximum 0.01%, sliders at minimum.
FREQUENCY RESPONSE: 12 Hz-105 KHz, +0 -1 dB, all controls flat.
BOOST AND CUT: 14 dB.

Cat. K44590

1 Unit...\$199

2 Units...\$379

PACKING AND POSTAGE \$10



RITRON 1

Our most popular model in a steel cabinet to minimise R.F.I. interference. Prices include tax, so get in quick!

1-4 \$139 5-9 \$135 10+ \$129


Green, Cat. X14500
Amber Cat. X14500



KEYBOARD AND CASE

Cat. X11080 \$279

Errors and Omissions Excepted

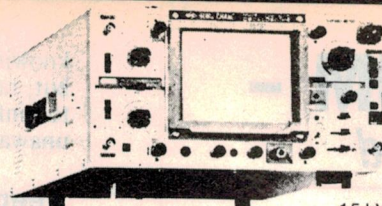

MODEL OS-645,
15 kV, 45 MHz, 1 mV/div.

"RITRON" DUAL TRACE OSCILLOSCOPES

- ★ LOW PRICE ★ HIGH QUALITY ★ EX STOCK
- ★ 12 MONTHS WARRANTY ★ ON DISPLAY ★

- ★ WIDE FREQUENCY BANDWIDTH: (70 MHz-6 dB)
- ★ OPTIONAL SENSITIVITY: All steps of vertical deflection factors are multiplied 5 times for the highest sensitivity of 1 mV/div.; 10 MHz.
- ★ DELAYED TRIGGER SWEEP: Any point of the waveform is addressed as a triggering start. So, any waveforms can be substantially and brightly magnified, thanks to the 5 kV bright CRT.
- ★ EXTREMELY BRIGHT DISPLAY: The metal back CRT (PDA) provides brightest trace display.
- ★ DELAY LINE: (for BS-625): Approximately 20 nsec before triggering point is displayed for real analysis of rise times.
- ★ SCALE ILLUMINATION
- ★ SINGLE SWEEP: A triggered sweep of a single waveform can be displayed.
- ★ TV SYNC.: TV composite signals can be easily synchronized.
- ★ MAGNIFIERS: Both vertical and sweep time are simply magnified to 5 times. (1 mV/div., 40 nsec/div.).
- ★ X-Y, or X-Y-Z OPERATION: Simply by turning the "sweep time/div. knob" to CH-B, this functions as a very high sensitivity X-Y oscilloscope (1 mV/div.) with intensity modulation.
- ★ HF REJ: High frequency noises can be rejected for the stable triggering by use of the low pass filter built in the triggering circuit.

REMEMBER: Ex stock, 12 month warranty, High quality components, Direct import, Flat face internal graticule screen, On view at both stores, Our 8th year of business!

CAT. NO.	MODEL	SCREEN	SENS	SIG. TRIG.	DEL. DEL.	B.WIDTH	T.BASE	WITHOUT TAX	WITH TAX	EXEMPT	PHOBES	COMMENTS
G12110	645	150mm	1 mV	Y	N	45 MHz	0.2uS 0.55div	\$1,045	\$950		\$1,045	(70 MHz-6 dB)
G12105	620	150mm	5 mV	N	N	20 MHz	0.5uS 0.55div	\$549	\$485		\$549	(45 MHz-6 dB)
G12100	6155	95mm	5 mV	N	N	15 MHz	0.5uS 0.55div	\$595	\$545		\$595	(AC-DC Operation)



VOYAGER CAR COMPUTER NEW IMPROVED MODEL WITH MASSIVE SAVINGS!! ONLY \$125 COMPLETE!!

Originally \$199, the Voyager Car Computer represents absolutely outstanding value for money. The voyager is the only low-cost "full-function" car computer that will give you fuel consumption (the most important feature in a car computer) in both litres/100 km. and good old miles/gallon!

The voyager comes absolutely complete with all fitting hardware (even a roll of insulation tape!) Installation generally takes 4-6 hours depending on the vehicle.

VOYAGER OPERATING FEATURES:

- ★ Instantaneous fuel consumption from sec. to sec. as you drive.
 - ★ Distance travelled since the log computer was last re-set.
 - ★ 5 digit display (10mm high).
 - ★ Fuel used since the log was last re-set.
 - ★ Average fuel consumption since the log computer was last re-set.
 - ★ Instantaneous speed as you drive from sec. to sec.
 - ★ Clock with 12 hour format. Can be used as a stop watch.
 - ★ Straight forward calibration.
 - ★ Metric and Imperial conversions.
 - ★ Light sensor automatically adjusts brightness of display.
 - ★ Average speed over trip.
 - ★ Elapsed time since the trip computer was last re-set. Can be used as a split lap timer.
 - ★ Distance travelled since the trip computer was last re-set.
 - ★ Lights left on alarm.
 - ★ Dimensions 200 (W) X 71 (H) X 90 (D) mm.
- Hundreds sold of the old version at \$199, now you can grab a new improved model, including a full 90 day warranty, for a mere \$125!! That's a colossal saving of \$74!!
(As reviewed in EA Oct. '82 and ETI Nov. '82)

Cat. X12010 \$125

SPARE FLOW SENSORS: We will be supporting this product for many years to come. To avoid problems changing cars, why not buy a spare fuel flow sensor? They are about the only thing that wears out!

Cat. X12036 \$29.50

Unfortunately, it is not practical to suggest firm "lower boundaries" or upper limits for equipment that might qualify for use with CD players, partly because much depends on subjective considerations.

The fact is that a compact disc player would provide consistently cleaner sound than other likely signal sources, even through a humble 2x5W stereo system driving a pair of 10cm loudspeakers. But it could certainly not do justice to the potential quality of the discs.

On the other hand, I would expect F.B.'s system, based on a Sansui 2x40W amplifier with 0.06% THD, to provide some very acceptable sound, in conjunction with a CD player. The AUX input S/N ratio of 95dB would not be a liability in an average home, where the ambient noise would almost certainly be well above any likely contribution from the amplifier.

But is a power output of 40W RMS per channel really sufficient? That would depend on the sensitivity of F.B.'s loudspeakers and what he regards as an acceptable maximum level of sound. If it is currently adequate for his listening needs, or there is power to spare, the expense of a more pretentious system may not be justified — at least not as a matter of urgency.

If, on the other hand, F.B. feels that his amplifier is currently being pushed to its limits, there would be a case for a more powerful unit and perhaps for adequately rated loudspeakers no less sensitive than his present ones. The point behind this last remark is that there would be little advantage in picking up an extra 4dB in amplifier power, only to lose it in loudspeaker sensitivity!

Without a first-hand knowledge of F.B.'s Polk loudspeakers, his listening environment and his personal expectations, it is difficult to be more precise. Let's just suggest that his present system should be capable of very acceptable CD sound up to levels which most householders would judge to be adequate — therefore above that "lower boundary".

If F.B. wants to upgrade in a meaningful way, he will have to dig fairly deeply into his resources.

Where lies the upper limit? For most of us — and I include myself — it's somewhere way up there, beyond what we can afford, or would want to spend, or could conveniently accommodate in our homes. The point is that good compact discs can provide audio signals of a quality that bears comparison with anything available anywhere and, if you aspire to the absolute best and can

afford and accommodate and appreciate it, that's the upper limit for you.

But this should also be said: the "best" is notably subject to the law of diminishing returns. There would be a very apparent difference in performance between F.B.'s hypothetical 2x5W system and his 2x40W Sansui, each with its own peripherals. A new 2x120-200W system would sound somewhat better again, particularly at higher power levels but, beyond that, increments in sound quality would become progressively more subtle and progressively more expensive — perhaps spectacularly so!

Back to earth again: what can be expected when a compact disc is broadcast and received via FM radio? Well, amongst other things:

- The top frequency limit drops from 20kHz to 15kHz: for most, an academic difference.
- THD rises (typically) from 0.005% to 0.15% or more: not bad, but not as good either!
- S/N ratio and dynamic range falls from 95dB to about 70dB: silence is no longer profound.
- Channel separation decreases from 90dB at 1kHz to about 40dB: some loss of stereo imaging.

From the above, it is evident that an FM broadcast system cannot convey to the listener the full potential of a compact disc recording but even so, as F.B. observes, the sound can still be very satisfying. A top-line tuner might conceivably recover the odd decibel here and there but it could not cancel out the residual limitations of the FM system.

Taped copies

F.B. also asks about re-recording compact discs on tape (potentially an infringement of copyright). In fact, even professional quality analog tape decks would impose their own characteristics and limitations on the signal, typically:

- Frequency Response: upper limit (−2dB) ranging between 15kHz and 25kHz, depending on tape, speed, bias, signal level, &c. Lower limit (−2dB) 30Hz.
- S/N Ratio and Dynamic Range: around 70dB, unless boosted to 100+dB by dbx noise suppression (itself not acceptable to all hifi "purists").
- THD: up to 1%, depending on tape, speed, bias, signal level, frequency, &c.
- Channel Separation: 55dB.
- Wow and Flutter: 0.05% or less.

The above figures can be taken as a

rough guide only, varying widely from one type of deck to another, and further complicated by four or five different systems of "weighting" specifications. In broad terms, a direct, open-reel analog tape copy of a compact disc would probably end up comparable in overall quality to an FM broadcast: very good listening but minus the ultimate sonic "sheen" of the original and minus its ultimate quiet, without dbx.

What about a copy of the same disc on the same deck via FM radio? Inevitably, it would not be quite as good as the broadcast which, in turn, would not be quite as good as the disc!

As a genre, compact cassette decks — even the good ones — are a step behind the professional open-reelers. From a CD source, they can still provide very enjoyable listening but without the original "sound out of silence", the totally unstressed dynamics and the glass-hard transients.

It is for such reasons that there is an evident trend away from analog audio tape equipment at both a professional and enthusiast level.

As indicated in the recent report on the Melbourne AES Convention (Dec. '84 issue) many professional studios are currently re-equipping with digital multi-channel recorders, which offer performance figures commensurate with compact disc mastering requirements, plus the considerable advantage of computerised editing and mixing.

Overseas, at enthusiast level, the trend is towards the use of video-based audio equipment, for high quality home recording — a lack of flexibility notwithstanding.

PCM Adapters such as the Sony 701ES (reviewed in December '83) offer stereo quality which virtually matches that of a compact disc, plus a playing time of 3 to 4 hours on a standard video cassette.

Hifi-stereo VCRs like the National NV-850 (reviewed in January '85) also offer up to 4 hours playing time on a video cassette, with an overall quality broadly equivalent to that of a good FM broadcast and well ahead of an audio cassette deck.

In saying this, however, I am not suggesting that it is either wise or legal to invest a lot of time and money acquiring the means to copy compact discs, either direct or off-air — even though such a pattern appears to be developing overseas.

F.B.'s best course might even be to devote his dollars to collecting pristine original discs, and his time to enjoying them!

VCR Hifi Sound Explained—Pt. 2

In last month's article we discussed the audio recording process involved in a typical domestic hifi VCR. In this issue, we examine the complementary playback circuitry and processing.

by NEVILLE WILLIAMS

First, a word about video and audio head tracking.

For optimum playback, it is essential that, in traversing the tape, the heads follow a path which coincides closely with the sequence of tracks recorded on the tape. In large degree, this depends on the accuracy and uniformity of the tape transport mechanism from one VCR to the next but, as a precaution, most VCRs to date have a video "tracking" control tucked away somewhere on or under the front panel.

Normally a potentiometer, its effect is to modify voltage levels in the servo loop which relates pulses on the tape-edge control track (therefore the tape travel) to rotation of the head drum. The tracking control is operative only during the playback mode and, most times, can be left in the detent or neutral position. However, it can improve the picture quality from some recordings by slightly advancing or retarding the tape to compensate for a discrepancy in track position.

The NV-850 retains a normal video tracking control to ensure compatibility with conventional cassettes, recorded commercially or on other VCRs. In addition, however, it has an audio tracking control and provision to use the output level meter as an aid to its adjustment.

Contrary to what has been said elsewhere, neither tracking control has any affect on head azimuth angles; these are set to the tightest practical tolerances during manufacture.

In fact, the audio tracking control operates on the same servo loop as the video tracking control and both have essentially the same effect. In due course, they will probably be rationalised into a single knob or even "automated".

The point is that, being much narrower ($26\mu\text{m}$ as compared with $49\mu\text{m}$) the audio tracks call for more critical tracking adjustment; hence the

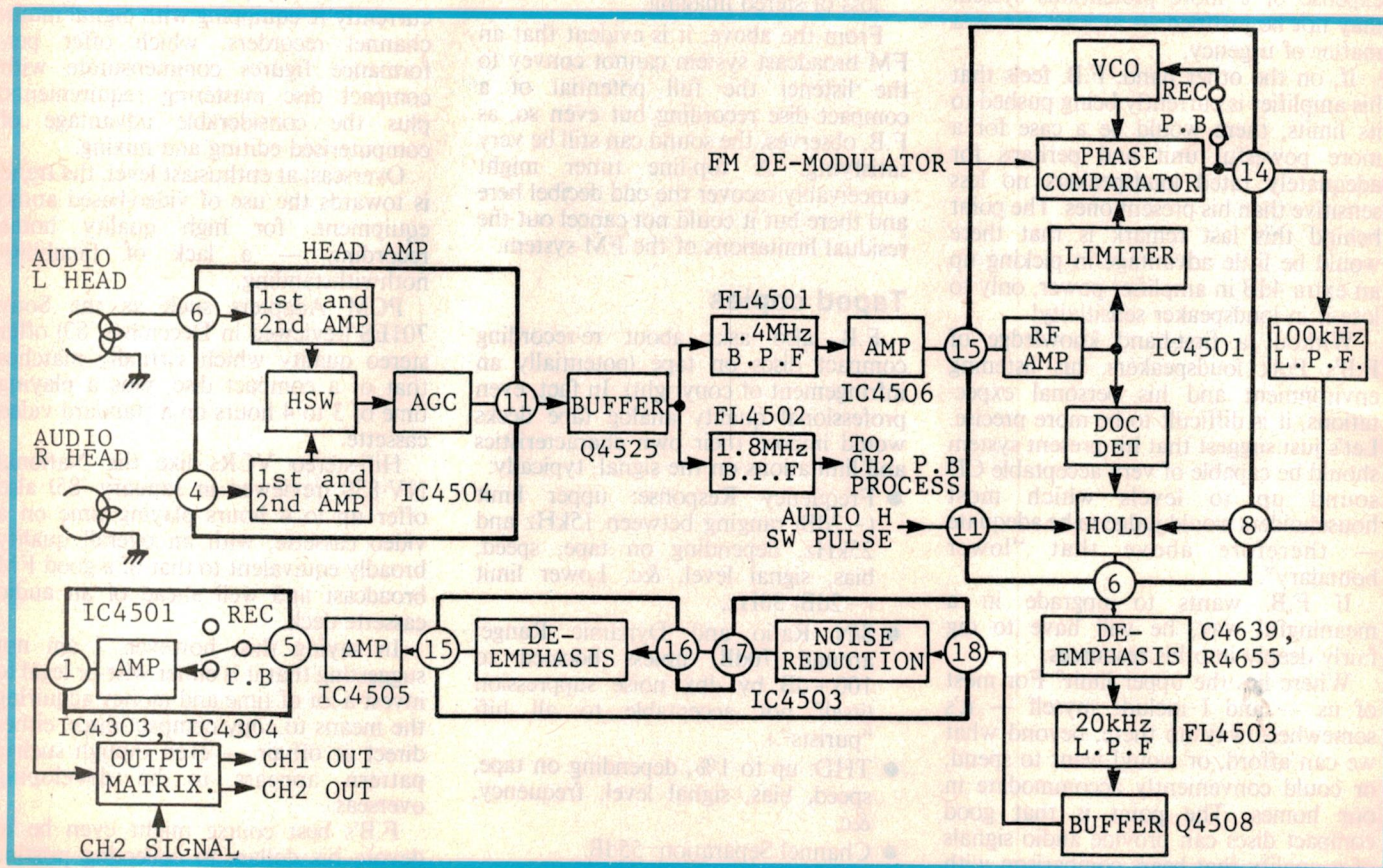


Fig. 7: The audio playback process, as summarised in this block diagram from the Matsushita Training Manual for the NV-850. Certain key sections are used both for Record and Playback.

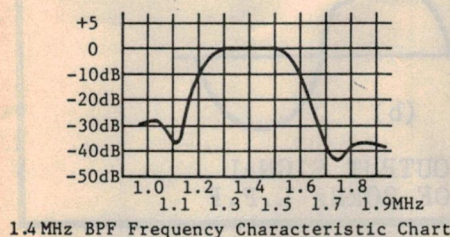
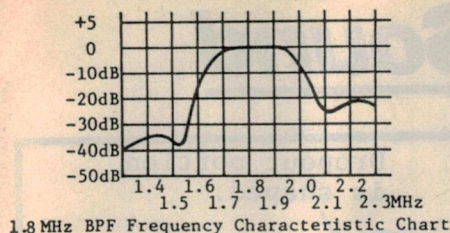


Fig. 8: The band pass filters which select and separate the two FM carriers from the composite signal picked up by the two audio heads.

special provisions in the NV-850. Fairly obviously, with precisely positioned tracks (as per Fig. 3 last month) exact audio tracking would automatically ensure exact video tracking.

Problems could arise, however, with tapes in which the tracks are significantly misplaced relative to each other. That would lead to a situation where audio tracking could be optimised only to the extent that it did not unduly prejudice picture quality.

Certainly, a point to watch.

Playback mode

As with the recording mode, the recovery from the tape and the processing of the two FM audio carriers is a complicated procedure, but one which is streamlined by the use of dedicated ICs and also by employing key sections of the electronics for both purposes. Fortunately, this can be done relatively cheaply and reliably, these days, by using transistors or IC elements as signal routing switches, turning them on or off with DC "REC" (Record) or "PB" (Playback) control signals.

For example, during recording, the non-driven end of each head winding is effectively grounded by a shunt transistor, turned on by the REC control signal. For playback, the windings are used the other way around, with the shunt transistor turned off and the formerly driven end effectively grounded by a further shunt transistor and the now-passive recording amplifier.

Fig. 7, in this case reproduced directly from the National NV-850 Training Manual, illustrates the playback processing in block schematic form.

With the deck in Playback mode, the twin FM carrier signals from the two audio heads (left) are fed to flat-response, multi-stage IC preamplifiers, broadly similar to those used for the video

signals. This is logical, because the audio carriers share part of the same frequency spectrum on the tape.

From the preamplifiers, the signals pass to an Electronic Head Switching system (HSW). Locked to the rotation of the video drum, it merges the succession of 1/50th second scans into a substantially continuous signal, which an AGC system holds to a convenient, predetermined level.

The composite signal then passes to a buffer amplifier and on to a pair of Band Pass Filters (BPF) centred at 1.4 and 1.8 MHz (See Fig. 8) which separate out the two carriers for subsequent independent processing. The block diagram shows the processing for the 1.4 MHz (L) channel only, the R channel being virtually identical.

Demodulation

Following the 1.4 MHz signal through, it is seen to be amplified and then split two ways, with one feed going through an FM limiter to a demodulator involving the same VCO as used in the recording process, but in alternative mode. With a frequency modulated carrier being fed into the phase comparator, the system spontaneously generates a constantly varying error correction voltage in order to preserve phase lock with the incoming signal.

The relationship between carrier frequency deviation and error correction voltage is, in fact, notably linear, such that the error voltage is a near perfect replica of the original audio modulation — therefore of the L (Left) audio channel signal. Similarly for the R channel signal.

As with most demodulators, the "raw" audio output is mixed with a significant residue of carrier energy, calling for RF filtering, before it is fed to the audio system. At this stage, however, only partial filtering is provided in the way of a 100 kHz LPF (Low Pass Filter) between the demodulated output (pin 14) and pin 8, which feeds it back into the Dropout Correction Circuitry (DOC) of the same IC.

The 100 kHz LPF (Fig. 9) does markedly reduce the amount of RF superimposed on the audio but, more importantly, it delays the audio signal by just the right amount to complement the action of the dropout compensator.

Dropout compensation

As with a video dropout compensator, common to all domestic VCRs, the purpose of the audio dropout compensator is to subjectively disguise transients or aberrations in the signal caused by foreign particles on the tape or by discontinuities in the coating.

As shown, the DOC detector is fed from the same RF source as the limiter

stage and, on detecting an IF signal dropout, generates a pulse which instructs a "Hold" circuit in the audio chain to hold the audio envelope at its current instantaneous value.

At the end of the dropout, when the IF signal reappears, a further pulse triggers a monostable multivibrator (MMV) which generates a supplementary Hold signal, extending the original Hold by a small, predetermined amount.

Because the DOC detector is fed directly from the IF amplifier chain, it can deliver a Hold instruction to the appropriate circuitry *before* the potential audio disturbance enters the audio channel, after having been deliberately delayed in the 100 kHz filter, mentioned earlier. And, because the Hold instruction has been lengthened by the supplementary signal from the multivibrator, it is not cancelled until *after* the source signal has had time to recover from the aberration.

Switching noise

The DOC also has to deal with possible noise interference caused by the (electronic) head/head switching mentioned earlier. The switching is initiated by a 25 Hz square wave, synchronised with the drum rotation — a head/head switch coinciding with each vertical pulse of the 25 Hz control signal, hence 50 pulses per second.

As shown in Fig. 7, the control signal is also fed to the DOC system (shown as "Audio H SW Pulse"). Here, it is frequency doubled to a 50 Hz square wave and used to feed a TPG (Trigger Pulse Generator) and MMV (Monostable Multivibrator) which jointly provide further Hold Signals, critically timed to coincide with possible head switching transients.

While the "Hold" circuitry can greatly reduce gross aberrations in an analog waveform, it can still create its own discontinuity, as illustrated in Fig. 10a. Fortunately, however, this can be rounded off considerably when, as shown, the audio signal is passed through a de-emphasis network and a 20 kHz low

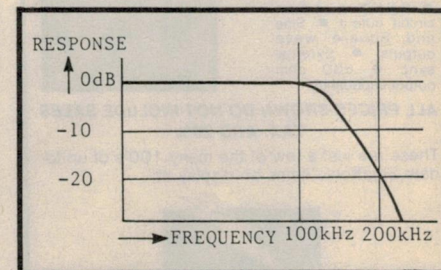


Fig. 9: A 100 kHz low pass filter provides useful RF filtering after the demodulator but, more especially, delays the audio signal just enough to complement the action of the dropout compensator.


Looking to purchase instruments

We are stockists of Hitachi, Fluke, Trio, Goodwill, Meguro, Aaron and Kikusui: so if you're in the market for an oscilloscope, think of David Reid.

20 MHz KIKUSUI COS5020

\$525.00

+ 20% Sales Tax
INCLUDING TWO PROBES
AND DUST COVER




(Vertical Axis), 1-2-5 sequence, 10 range; Sensitivity, 5mV/DIV ~ 5V/DIV, (within $\pm 3\%$); Frequency response, DC (AC: 10Hz) ~ 20MHz (-3dB , 8DIV); Operation mode, CH1, CH2, DUAL, ADD, X-Y (DUAL automatic switching ALT and CHOP); (Horizontal Axis), 1-2-5 sequence, 20 ranges; Sweep time, 0.2 μ sec ~ 0.5sec/DIV (within $\pm 3\%$); (with 10 \times MAG.), 20sec ~ 50msec/DIV (within $\pm 5\%$).

40 MHz KIKUSUI COS5041

\$951.00

+ 20% Sales Tax
INCLUDING TWO PROBES
AND DUST COVER



(Vertical Axis), 1-2-5 sequence, 10 range; Sensitivity, 5mV/DIV ~ 5V/DIV, (within $\pm 3\%$); Frequency response, DC (AC: 10Hz) ~ 40MHz (-3dB , 8DIV); Operation mode, CH1, CH2, DUAL, ADD, X-Y (DUAL automatic switching ALT and CHOP); (Horizontal Axis), (A: Main sweep, B: Delayed sweep); Sweep time, 1-2-5 sequence, A: 20 ranges, B: 11 ranges; A: 0.2 μ sec ~ 0.5 sec/DIV (within $\pm 3\%$); B: 0.2 μ sec ~ 0.5 sec/DIV (within $\pm 3\%$); (with 10 \times MAG.), A: 20n sec ~ 50m sec/DIV (with $\pm 5\%$); B: 20n sec ~ 50m sec/DIV (with $\pm 5\%$).

ESCORT MULTIMETERS

EDM 1105 \$59.00
● 3 $\frac{1}{2}$ digits. ● Six functions: DCV, ACV, DCA, ACA, OHM, Diode Testing. ● 0.8% basic DC accuracy.

EDM 1125 \$89.00
● 3 $\frac{1}{2}$ digits. ● Seven functions: DCV, ACV, DCA, ACA, OHM, Diode Testing, Audible Continuity. ● 0.25% basic DC accuracy.

EDM 1135 \$119.00
● 3 $\frac{1}{2}$ digits. ● Eight functions: DCV, ACV, DCA, ACA, OHM, Diode Testing, Audible Continuity. ● 0.1% basic DC accuracy.

EDM 1346 \$195.00
● 4 $\frac{1}{2}$ digits. ● Eight functions: DCV, ACV, DCA, ACA, OHM, Audible Continuity Testing, Diode Testing, Data Hold. ● 0.05% basic DC accuracy.



All multimeters + 20% Sales Tax

GAG-808A AUDIO GENERATOR

\$199.00

Covers 10Hz to 1MHz

● 20Vp-p open circuit output ● Sine and Square wave outputs ● External sync ● 600 ohm output impedance



ALL PRICES SHOWN DO NOT INCLUDE SALES TAX. ADD 20%

These are just a few of the many 100's of up-to-date Electronic items on display at:



DAVID REID ELECTRONICS LIMITED

127 York Street, Sydney, 2000
or Telephone (02) 267 1385

VCR Hifi Sound

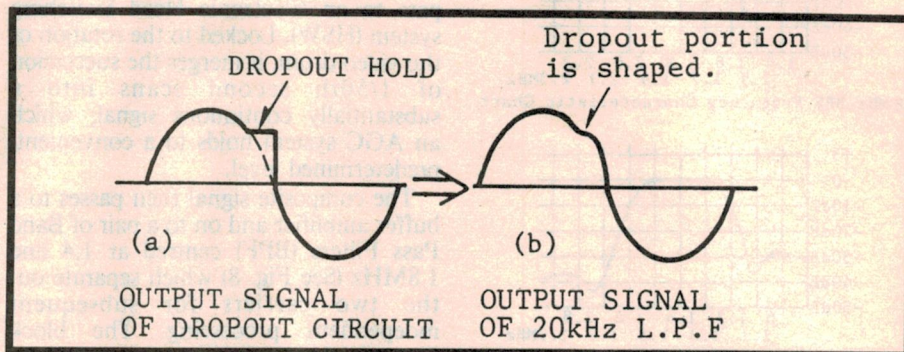


Fig. 10: A segment missing from a waveform is replaced by a "Hold" voltage (a) which is subsequently rounded out (b) by the effect of the de-emphasis network and low pass filter.

pass filter (LPF), followed by a buffer amplifier. Jointly, they have the effect of smoothing out the waveform (Fig. 10b) much as happens with any pulsed or digitised system.

Fig. 11 illustrates the timing of the DOC system in greater detail.

dbx expansion

At this point, the recovered audio signal is still in the compressed form resulting from the dbx processing prior to recording. It now has to be expanded in complementary fashion and this is performed by essentially the same dbx processor as used for recording, but suitably switched to reverse its action.

From the buffer amplifier mentioned above, the compressed audio signal is fed to the voltage controlled amplifier (VCA) of the dbx system, and also to the RMS detector through a weighting network similar to that used in the recording mode. As before, the weighting network increases the sensitivity of the RMS detector to the higher frequencies in the incoming signal, increasing their influence on the control voltage fed to the VCA.

However, in this case, the control voltage is fed to the VCA through an inverting amplifier, thereby reversing its effect on the signal being processed. Instead of dynamically compressing the signal, it now expands it by the same ratio, thereby restoring it to its original form.

As per last month's Fig. 5, signals at dbx 0dB reference are unchanged; those recorded in the range 0 to +5dB are expanded to 0 to +10dB; those in the range 0 to -35dB are expanded to 0 to -70dB.

Thereafter, the expanded audio signals are passed through a de-emphasis network to complement the recording characteristic, thereby achieving a substantially flat frequency response overall and, at the same time,

attenuating any residual high frequency background noise. Electrically, they need only to be fed to an amplifier.

Input & output

Over and above the rather specialised audio circuitry just described, a hifi/stereo VCR must logically be able to accommodate source signals and deliver output signals to meet a range of user requirements.

In the case of the NV-850, the design provides for a tuner which can automatically sense a stereo or a multiplex transmission (by reason of standard pilot tones), plus stereo line input and output sockets, &c, and electronic output switching controlled by pushbuttons on the front panel.

When switched to a station transmitting stereo or simulated stereo audio, the tuner automatically demodulates the Main and Sub sound carriers to produce normal left and right channel stereo signals. These are made available for headphone listening, for external amplification and for recording on tape via the twin FM sound carriers.

In this situation, the output switching would normally be set to the L+R position — the manufacturer's way of denoting stereo.

While probably somewhere "down the track" for Australia, the tuner may alternatively sense a multiplex (eg, bilingual) sound transmission. In this case, the modulation on the Main and Sub carriers would be kept separate and selected for ultimate listening by switching the external audio system to "L" or "R" as appropriate.

In the normal way, the Main 5.5MHz intercarrier TV sound channel would end up on the analog track in the interests of compatibility with a conventional VCR.

For simulcasts, which have been popular over the past couple of years, hifi VCR owners have the option of


"SO WHAT'S NEW IN CRS?"

...THE ANSWER IS IN THE PALM OF YOUR HAND

Now you don't have to leave your communications behind when you leave your vehicle. The ICOM IC-40 is a compact 40 channel UHF CRS field proven hand held, with optional 3 Watts output power, the same as many

mobile radios. The IC-40 is perfect for jobs on the land, water or business.

Contact your local dealer for a demonstration of the most advanced CRS portable available in Australia.

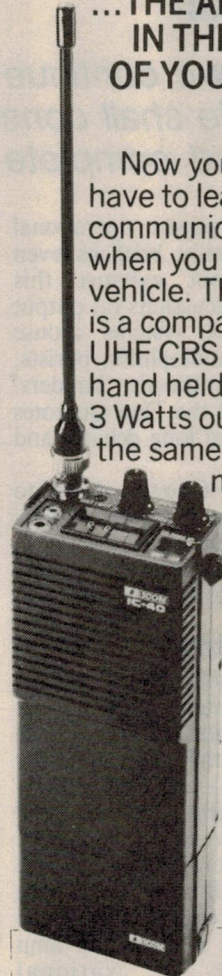

Please post to:

ICOM AUSTRALIA PTY. LTD.
7 DUKE STREET WINDSOR 3182.
VICTORIA.

Name

Address

City Postcode

or phone ICOM on (03)51 2284

 **ICOM**
The World System

IC 0012

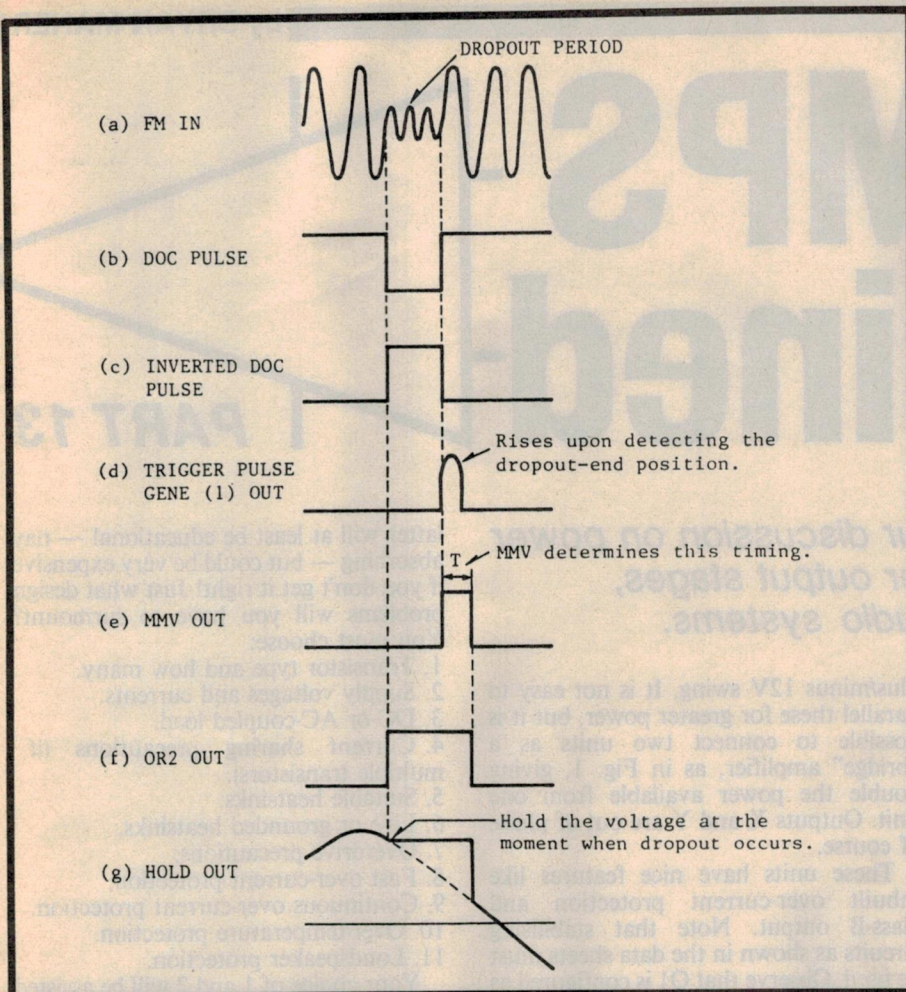


Fig. 11: When a dropout occurs (a) the detector produces a pulse (b). This is inverted (c) to produce a supplementary pulse (d&e), elongating the original pulse (f). This is long enough to straddle the noise transient, as delayed in the LPF.

recording the FM broadcast soundtrack by patching it across from a standard FM tuner. Indeed, hifi VCRs, such as the NV-850, do a fine job of recording any worthwhile stereo signal as a purely audio exercise, even when there is no associated video information.

And, of course, those modern films, with ear-tingling soundtracks, once fated to end up on dull sounding cassettes, can now be heard in the home at a quality level not far removed from a compact disc.


And that really is the "bottom line". One can be intrigued by the circuitry, as described. One might even suspect that a signal so extensively "processed" must somehow be compromised. But the simple fact is that the review published in our January issue rated the listening quality as "superb", with material copied from a compact disc virtually indistinguishable from the original.

For all the complexity of the signal processing, the system obviously works, and works well!

A basic text for the electronics enthusiast ...

BASIC ELECTRONICS

Available from "Electronics Australia", 140 Joynton Avenue, Waterloo, Sydney, 2017. **PRICE \$4.50.** Or by mail order: send cheque to "Electronics Australia", PO Box 227, Waterloo, 2017. **PRICE \$5.40.**

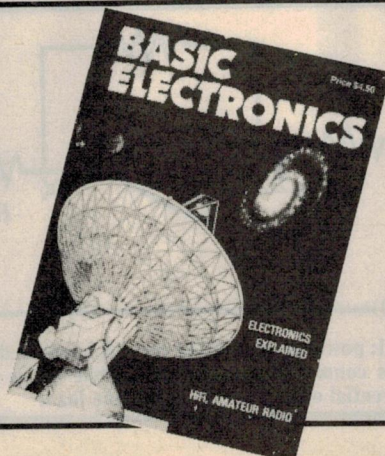

OP AMPS Explained

PART 13

This month we continue our discussion on power op amps. We shall consider output stages, feedback and complete audio systems.

Our foray into power operational amplifiers is necessarily brief as even large books do not exhaust this fascinating topic. Discussions on output stages and feedback systems arouse much adrenalin in audiophiles, purists, visionaries, castle-in-the-air builders, pipedreamers and all the Don Quixotes among us, stimulating long debates and lots of fun.

Happily some of it comes down to earth, recognising that electronic circuits do, in fact, obey natural laws, leading to a plethora of published papers, magazine articles and many real circuit designs.

Power output stage

Of all the possible configurations mentioned in EA January 1985, p74 let us restrict our discussion to Fig. 3 of that issue. This shows the three popular variations of the complementary-symmetry scheme using NPN and PNP transistors in pairs. And, for any very high power jobs where PNP types are not available, Fig. 2B and Fig. 2C are used. We have a few options open to us: (1) Go out and buy a power op amp integrated circuit, eg, National Semiconductor type LH0021.

(2) Make our own output stage using either:

- (a) Junction transistors, one NPN and one PNP eg, 2N5686/2N5684
- (b) Parallel connected groups of NPNs and PNPs for larger power
- (c) A pair of complementary power FETs eg, 2SK134/2SJ49
- (d) Parallel connected groups of pairs of FETs.

Of the above choices, (1) is attractive for small power requirements. Such circuits are true operational amplifiers and the LH0021 quoted can supply output currents up to one ampere at

plus/minus 12V swing. It is not easy to parallel these for greater power, but it is possible to connect two units as a "bridge" amplifier, as in Fig. 1, giving double the power available from one unit. Outputs X and Y are out of phase of course.

These units have nice features like inbuilt over-current protection and class-B output. Note that stabilising circuits as shown in the data sheets must be used. Observe that Q1 is configured as a non-inverting amplifier while Q2 is connected as an inverting amplifier. Thus the load is driven to double the output voltage, ie, one end up (positive) and the other end down (negative). Correct load impedances must be observed.

If you want still more power and/or the chance to beat your own drum about "proper" bias, class and feedback arrangements, then be a devil — use option (2) a, b, c or d above and build your own. EA has happily furnished you with complete designs, or you could race off and design one yourself. The former choice should guarantee success, the

latter will at least be educational — nay absorbing — but could be very expensive if you don't get it right! Just what design problems will you have to surmount? You must choose:

1. Transistor type and how many.
2. Supply voltages and currents.
3. DC or AC-coupled load.
4. Current sharing precautions (if multiple transistors).
5. Suitable heatsinks.
6. Live or grounded heatsinks.
7. Overdrive precautions.
8. Fast over-current protection.
9. Continuous over-current protection.
10. Over-temperature protection.
11. Loudspeaker protection.

Your choice of 1 and 2 will be assisted by data sheets from any of the many manufacturers, maybe from the American-inspired 2N or JEDEC series, the European style BC and BD types, or "in house" numbers such as Motorola MJ or Texas Instruments A or TIS series.

You will choose by reading data sheets, having in mind transistor speed (by comparing values of transition frequency f_T), and current and voltage ratings. For example 2N3055 type transistors are really too slow for high performance power operational amplifiers, despite their low cost. Required current and voltage you will

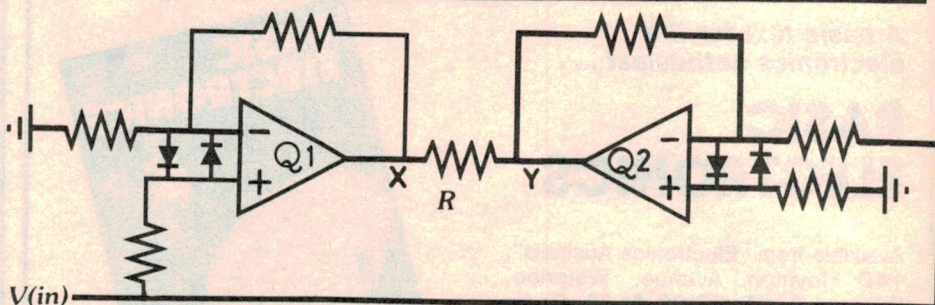


Fig. 1: power op amp using two 1A integrated circuits (type LH0021) in the bridge configuration. Q1 is connecting non-inverting while Q2 is set up as the inverting op amp. X and Y are the differential output points, R_L is the load.

first calculate, from your desired power and load impedance. Then select suitable transistors, mainly by inspection of the "safe operating area" (SOA) diagram, as in Fig. 2, keeping an eye on the power temperature derating curve as in Fig. 3, and your heatsink data.

For example, NPN 2N5686 is known as a 300W, 50A, 80V type but, most optimistic reader, you cannot operate it with both those values simultaneously as those numbers multiply to four kilowatts, inviting certain breakdown. The safe operating area diagram says 80V and 200mA are OK; also 6V and 50A or 30V and 10A are just within its limits.

In Fig. 2(a), the SOA curve for 2N5686, the curve from j to k indicates a current limit of 50A because that is all the transistor internal emitter bonding wire will carry.

From k to l shows current limit considering power dissipation, ie, voltage-current product, l to m is the region limited by the danger of second breakdown, and finally m to n is simply the absolute 80V voltage breakdown limit at any current.

Fig. 2(a) is called the "DC safe operating area" meaning that the transistor can safely sit all day anywhere inside the curve. Just the right curve to look at for class A amplifiers.

Contrast this with class B amplifiers where each transistor carries current only half the time, ie 50% mark-space ratio. For this consider Fig. 2(b), this time for a different transistor, 2N3847. Three alternative SOA curves are shown; that marked DC is the direct current or full time limiting area, the smallest one. But this transistor can safely exceed the DC curve for a short time. It may run out to curve X provided the mark-space ratio is not more than 50% and conduction is never longer than one millisecond. For other operation classes this transistor can further exceed these ratings for a very short time to curve Y provided the mark-space ratio is 10% or less and conduction time is always less than 300 microseconds.

Regarding Power Temperature Derating Curves, aspiring designers must carefully note that the example quoted in Fig. 3 is called a 300W transistor, but this power rating only applies at 25°C case temperature, which is almost never obtained. At 110°C case temperature this is only a 150W transistor, so Fig. 2 must be appropriately derated too!

Readers should consult some data sheets and see these curves. Luckily for us, as the load current increases, the voltage across the transistor decreases, especially in class B, but this point must be closely watched in class A. Chosen transistors should have a voltage rating

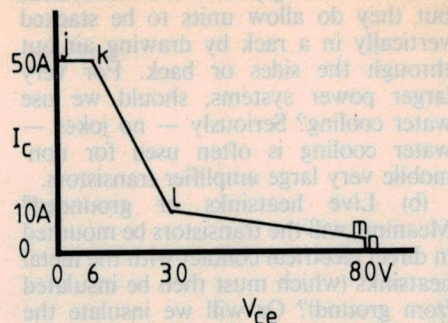


Fig. 2a: safe operating area curve for 2N5686 power transistor at $T_c = 25^\circ\text{C}$. Linear scales are used to show the true curve shape. The vertical axis is the collector current in amps; the horizontal axis is the collector-emitter volts.

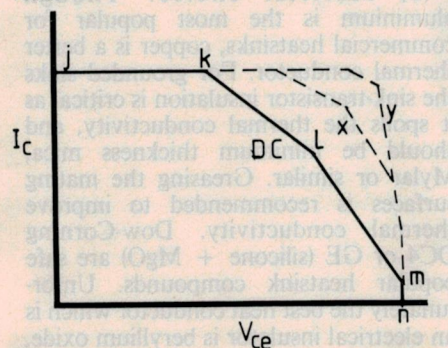


Fig. 2b: safe operating area curve for a typical silicon power transistor at $T_c = 25^\circ\text{C}$. The log scales usually disguise the true shape. For continuous currents we must stay within the curve marked DC. For 50% mark-space ratio faster than 1ms, curve X is allowed, while for 10% mark-space ratio faster than 300μs, curve Y is safe.

greater than the sum of both positive and negative supply voltages.

Current sharing means that if you connect two or more transistors in parallel you cannot assume that they will equally share the current. Here junction transistors are proper villains and FETs

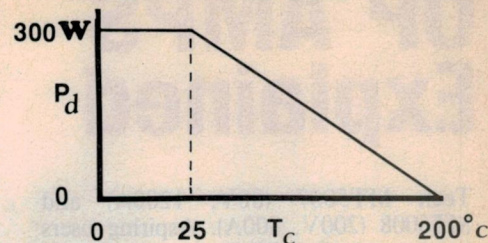


Fig. 3: temperature derating curve for 2N5686 transistor. Vertical axis P_d is the power which may be safely dissipated in heat by the transistor. If the transistor case is at 100°C, we must be satisfied with only about 170W instead of 300W.

are real saints. Junction transistors directly paralleled invite catastrophe as any one conducting more current than its fair share gets hotter, increasing its temperature, which raises its hFE, causing that transistor to conduct more current ... causing more temperature ... and very soon ... Boom!!

The cure is in Fig. 4 where resistors R, typically about 0.1 ohms, produce current-dependent voltage drops which subtract from the effective drive, so reducing the transistor current. Thus all transistors Q must conduct equally.

Also such resistors tend to compensate for change in hFE with drive or temperature.

Conversely, power FETs are nice, co-operative things in that they current share automatically because higher temperature causes less conduction.

A point of view slowly growing amongst modern designers is that paralleling NPN junction transistors is old hat and that it is more economical to buy a single large transistor. Manufacturers are stirring the market with slogans such as "un-parallel to save". Product examples include the Westinghouse WT5700 (1000V, 200A) and WT5705 (600V, 300A), or Power

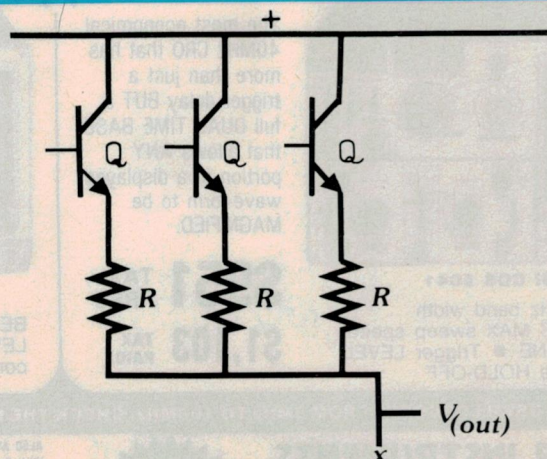


Fig. 4: three parallel NPN transistors are forced to equally share load current by emitter resistors R. The sum of the transistor currents goes to the load at $V_{(out)}$. X indicates the bottom half of the circuit where the same thing is done using complementary PNP transistors.

OP AMPS Explained

Tech MT5007 (80V, 1200A) and MT6008 (200V, 800A). Aspiring users must watch the hFE figure given which can drop off alarmingly at full current. The last two transistors quoted above are Darlington's with an excellent hFE of 100 at full current. New technologies are used in their manufacture which actually aim at non-linear power switching uses. Your optimistic author looks forward to some avant garde designer using them in large linear operational amplifiers. The present non-existence of large complementary PNP types is still a problem though.

Heatsinks

Heatsinks require a few decisions:

(a) Cooling: Do we use natural convection or use a fan? Usually, natural convection is chosen for small to medium designs up to 100 watts or so, reserving fan cooling for larger sizes. Fans have two nasty habits: creating

noise and failing just at the worst time, but they do allow units to be stacked vertically in a rack by drawing air out through the sides or back. For very larger power systems, should we use water cooling? Seriously — no jokes — water cooling is often used for non-mobile very large amplifier transistors.

(b) Live heatsinks or grounded? Meaning, will the transistors be mounted in direct electrical contact with the metal heatsinks (which must then be insulated from ground)? Or will we insulate the transistors electrically from grounded metal heatsinks? Live heatsinks give better cooling but ease of construction often dictates grounded heatsinks with insulated transistors.

(c) Material choice? Though aluminium is the most popular for commercial heatsinks, copper is a better thermal conductor. For grounded sinks the sink-transistor insulation is critical as it spoils the thermal conductivity, and should be minimum thickness mica, Mylar or similar. Greasing the mating surfaces is recommended to improve thermal conductivity. Dow-Corning DC4 or GE (silicone + MgO) are safe popular heatsink compounds. Unfortunately the best heat conductor which is an electrical insulator is beryllium oxide,

BeO [the BE(2+) ion has the highest charge-to-radius ratio]. Hence its suspension in silicone grease is used on many heatsinks. (Warning! Beryllium and all its compounds are exceedingly poisonous, especially if inhaled, eaten or allowed into cut fingers or under fingernails.)

For heat energy to flow from a transistor junction at temperature T_j to the transistor's case at temperature T_c , there must be a difference in temperature ($T_j - T_c$). This difference is known as the "temperature gradient" T_{jc} . Everything in nature has the capacity to store some heat for a given temperature rise. We call this the thermal capacity, Ch . This heat storage acts like a low pass thermal filter and we call the time taken for the first 63% of any change by the obvious name, the "Thermal Time Constant", using these units:

Heat Energy (in joules)

Temperature T (in degrees centigrade)

Rate of flow of heat energy (in joules per second = watts)

Thermal capacity Θ (in degrees per watt)

Thermal resistance Ch (in joules per degree)

Thermal time constant = ΘCh = seconds.




KIKUSUI

OSCILLOSCOPES COS 5000 SERIES

With KIKUSUI for performance & reliability and EMONA for back-up & after-sales service... the COS 5020 was the 20MHz oscilloscope selected for the NSW Government contract! (No: 83/661)



COS 5041 40MHz DELAY with DUAL TIME BASE

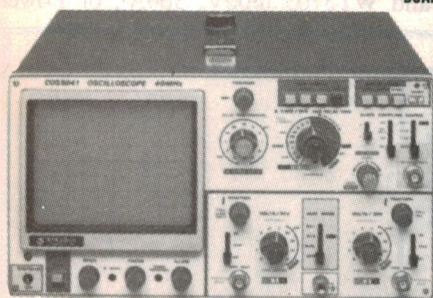

KIKUSUI COS 5041

- 2 Channel 40MHz band width
- 1mV/Div • 20nS MAX sweep speed
- Built-in DELAY-LINE • Trigger LEVEL LOCK • Variable HOLD-OFF


The most economical 40MHz CRO that has more than just a trigger delay BUT a full DUAL TIME BASE that allows ANY portion of a displayed wave-form to be MAGNIFIED.

\$951 TAX FREE

\$1,103 TAX PAID

2 YEAR WARRANTY

COS 5020 20MHz LOW COST

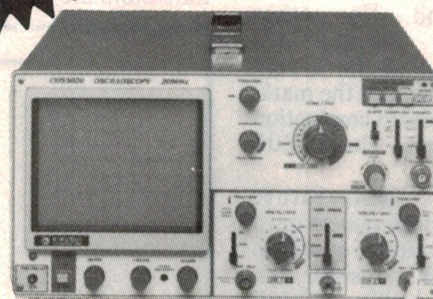

KIKUSUI COS 5020

\$525 TAX FREE

\$609 TAX PAID

- 1mV/DIV MAX sensitivity.
- Fast 20nS MAX sweep speed for greater resolution.

BEST TRIGGERING available on a 20MHz CRO in this price range. LEVEL-LOCK & HOLD-OFF functions enable stable triggering of complex or noisy signals.

KIKUSUI OSCILLOSCOPES FROM 5MHz TO 100MHz. CHECK THE NEW LOW COST DIGITAL STORAGE CRO DSS-5020.



EMONA INSTRUMENTS

A division of Emona Enterprises Pty. Ltd

1st Floor
720 George St
Sydney, 2000.
Phone: (02) 212-4599

NOW OPEN SATURDAY MORNINGS

ALSO AVAILABLE FROM:

NSW Davard Electronics, Sydney. Phone 267 1385
Geoff Wood Electronics Pty Ltd, Rozelle.
Phone 810 6845

Emtronics Sydney City 2110531
Martin De Launay (Newcastle) Pty Ltd. Phone 52 8066
ACT Electronic Components Pty Ltd, Fyshwick.
Phone 80 4654

QLD Batec Systems Pty Ltd, Brisbane. Phone 369 5900
Nortek, Townsville. Phone 79 8600

VIC Radio Parts Group, Melbourne.

Phone 329 7883

WA Hanco Engineering Pty Ltd, Perth.

Phone 381 4477

SA Im's Communication Systems Pty Ltd.


Port Adelaide. Phone 47 3688

TAS George Harvey Electronics, Hobart.

Phone 34 2233

George Harvey Electronics, Launceston.

Phone 31 6533

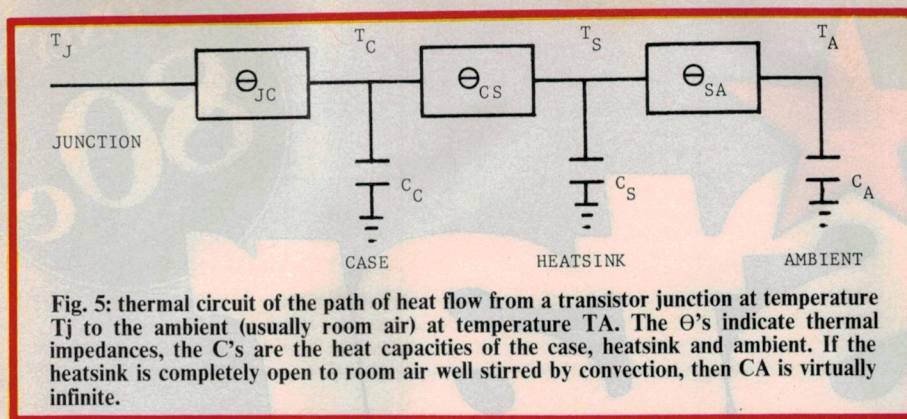

The statement that the product of Θ and Ch equals seconds is easy to show:

$$\Theta Ch = \frac{\text{degree}}{\text{watt}} \times \frac{\text{watt, second}}{\text{degree}} = \text{seconds}$$

Then the rate of flow of heat, W , say from the junction to the case, is equal to:

$$W = \frac{\Delta T}{\Theta} = \frac{T_J - T_C}{\Theta_{JC}} \quad \dots (1)$$

$$T_J = T_C + W\Theta_{JC} \quad \dots (2)$$

where:

W is the rate of flow of heat

T_J is transistor junction temperature

T_C is transistor case temperature "at equilibrium"

Θ_{JC} is thermal resistance from junction to case.

Equation (2) shows why the junction temperature (the only temperature that really matters), can be much higher than that of the case. Equation (1) is said to be

a "dual" of Ohm's Law for electrical circuits, and we sometimes talk about the "duality" existing between this thermal system and an electrical system. Two different systems are called "duals" if they are described by the same form of equations (but different constants and variables). We say T_C is case temperature "at equilibrium" meaning that after a junction temperature rise, some time will elapse before the case temperature rises to the value predicted by the equation (2). This effect is not because of any slowness of heat flow but is caused by the heat storage capacities.

Before equilibrium, the case temperature is given by a complex non-linear exponential equation involving seconds of real time, all heat capacities and all thermal resistances. The latter are symbolised by thermal resistances:

Θ_{JC} = junction to case

Θ_{CS} = case to heatsink

Θ_{SA} = heatsink to ambient (room air usually)

Θ_{JA} = junction to ambient

$\Theta_{JA} = \Theta_{JC} + \Theta_{CS} + \Theta_{SA} \quad \dots (3)$

Equation (3) implies that junction, case, heatsink and ambient air are all at different temperatures, as depicted in Fig. 5, with T_J highest.

The thermal resistance Θ_{JC} from transistor junction to case is part of the transistor design. For very large transistors, manufacturers have had to find techniques such as "silicon-molybdenum-coppercase" sandwich soldering/brazing to ensure very low Θ_{JC} , eg, below 0.25 degrees per watt. The other thermal resistances are your responsibility, zealous amplifier designer! Clearly Θ_{CS} is minimum when thermal conducting grease and no insulation are used, and Θ_{SA} can be lowered by improved air circulation, larger heatsink fin area, and dull black surfaces. Extremely thin black anodising is best, black paint is a no-no as it just insulates the heatsink from the air. Some very large transistors are designed to favour water cooling.

The heatsink itself can be anything from the back panel of the case (insulated transistors) to large aluminium

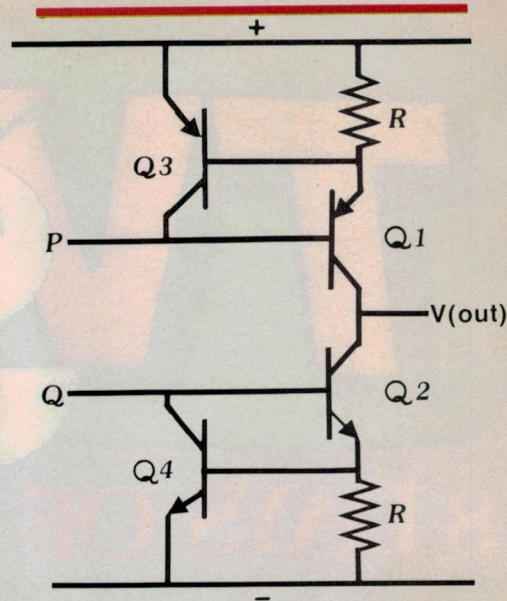


Fig. 7: over-current protection circuit for collector output (common emitter) output stage. This works in similar fashion to Fig. 6 and is the method used in the LH0021 integrated power operational amplifier.

extruded single-sided or double-sided heatsinks.

Overdrive precautions prevent power amplifiers from smashing your expensive speaker cone or suspension on signal peaks. Especially needed with live signal sources such as your bass guitar, they usually take the form of diodes and/or zeners across base (or gate) to ground to simply place a limit on available drive.

Over-current protection

Over-current protection must be considered separately in terms of the first 20 microseconds or so, followed by the sustained effects. It is quite possible to ruin a power transistor by excessive over-current in as short a time as 15 microseconds. Your repentant author has done just that (shame, shame!). This would be by "second breakdown" changing the crystalline doping distribution when large voltage and current exist simultaneously. Protection circuits obviously must be either very fast or useless (the quick and the dead?), or — as a different philosophy — never allow large rate-of-change of current di/dt to flow at all.

Fig. 6 shows fast over-current protection, Q_3 , Q_4 , for emitter follower output transistors Q_1 , Q_2 . R is a low value (few tenths of ohm) chosen to produce enough millivolts to turn on Q_3 if Q_1 current exceeds a nominated limit. Turning on Q_3 pulls the drive P away from Q_1 base as Q_3 (when on) can saturate down to 300 millivolts if necessary. (Q_3 when off is effectively not there.)

For designs using collector output, Fig. 7 acts similarly.

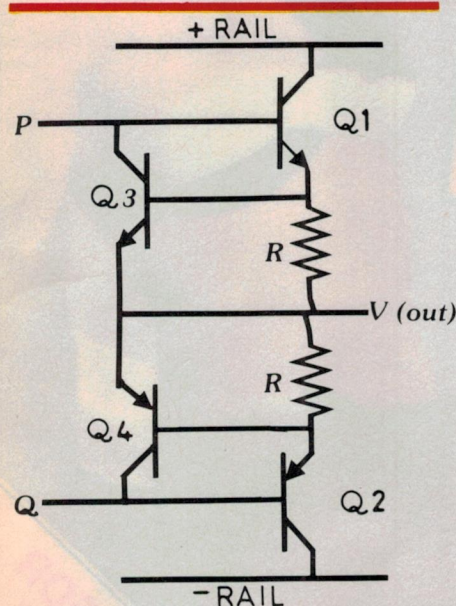





Fig. 6: one possible method for over-current protection of emitter follower output transistors. Low-value resistors R cause a voltage drop due to current through Q_1 , Q_2 . Over-current causes enough voltage across R to turn on Q_3 or Q_4 , thereby removing base drive signals at inputs P and Q .

TV★star

ONLY
80¢

8 DAYS OF TV PROGRAMS

It's fast becoming the magazine everyone needs as their guide to the best television . . . TV Star is the showbiz specialist! The big stories, the best pix both at home and Hollywood: It's here first!

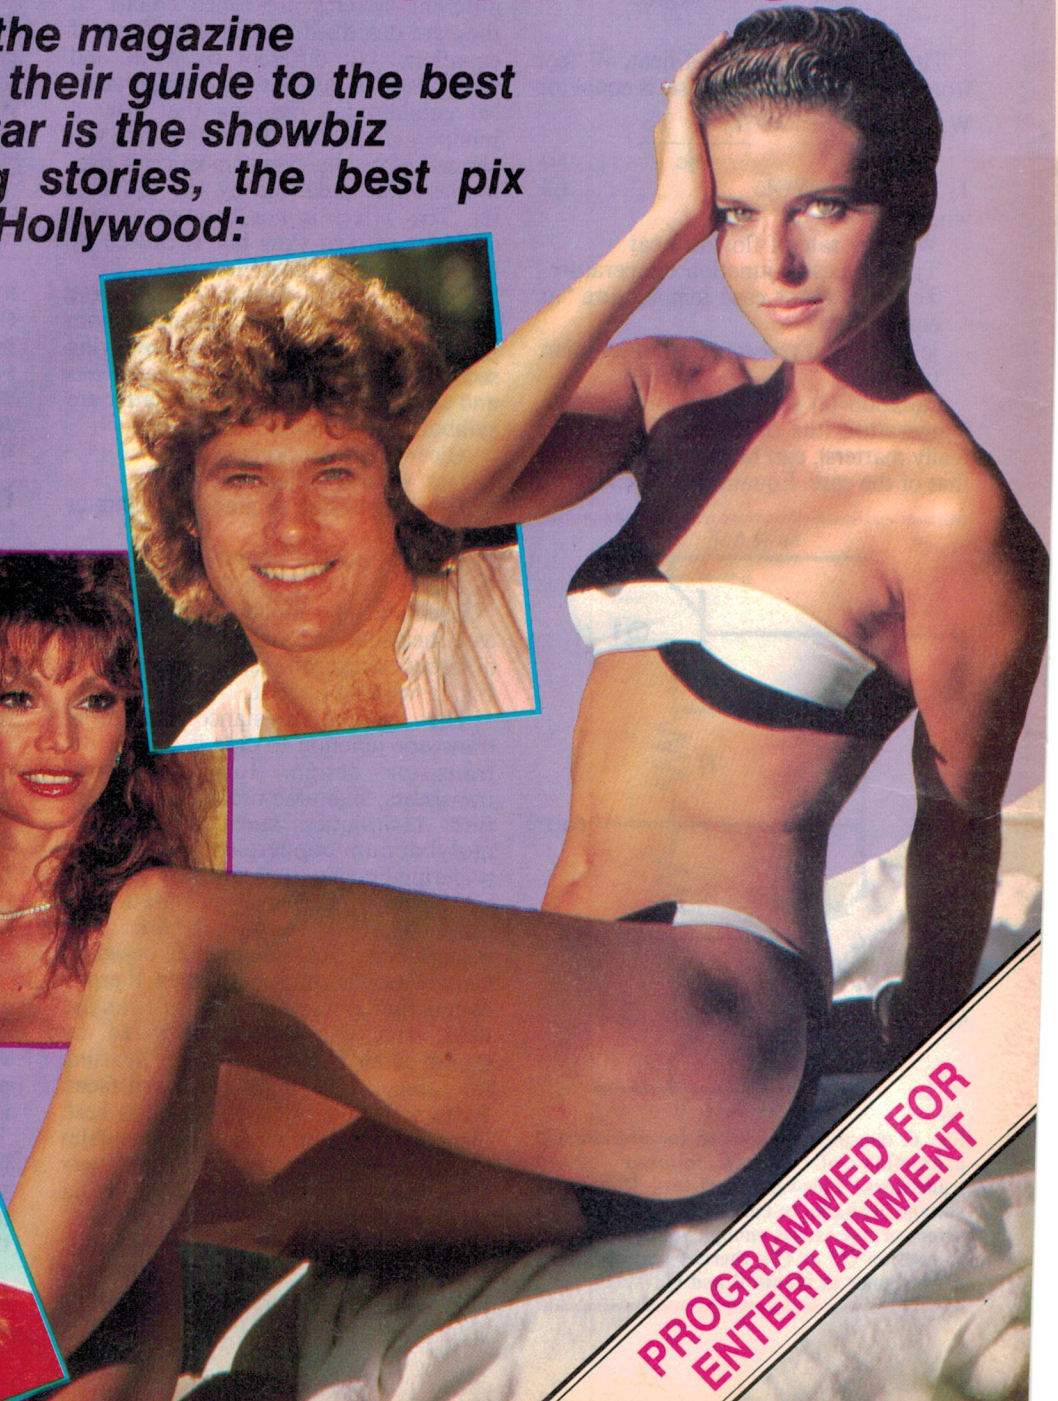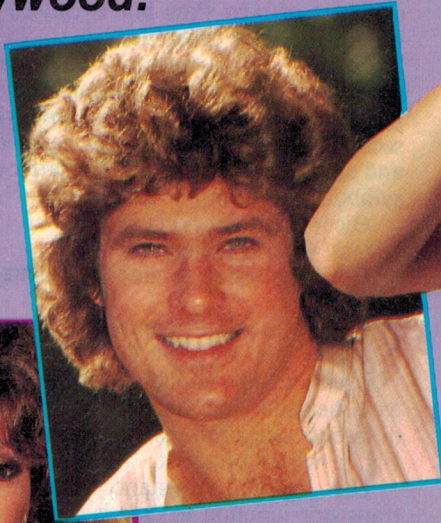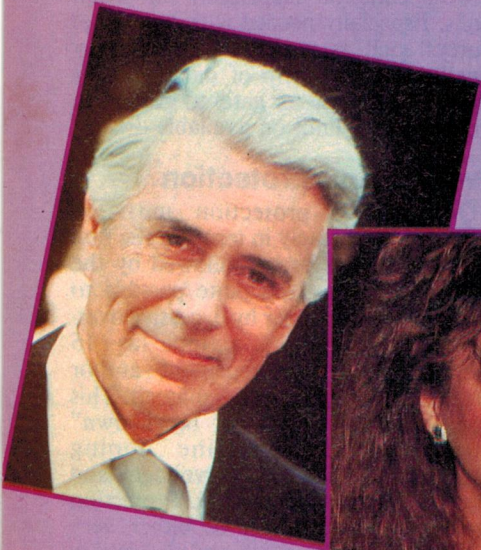

PROGRAMMED FOR
ENTERTAINMENT

OP AMPS Explained

A third possibility is to use regulated power supplies, each with its own current limit and no further protection in the amplifier. Good idea — but watch out for any large storage capacitor across that power supply output! Such capacitors can supply hundreds of amps peak current independent of the current-limited regulator.

Over-temperature protection

Overttemperature protection need not be fast. It could take the form of Fig. 8, or alternatively a transistor or other suitable component bolted to the heatsink and operating a relay whose contacts switch all power supplies. Such temperature protection is essential where fans and horizontal air-flow or water cooled heatsinks are used.

Loudspeaker protection circuitry was born when the story "\$200 loudspeaker burns out and protects \$2 fuse" ceased to be a joke. OK — we have provided overdrive protection — but what if an output transistor fails by collector-emitter or collector-base or drain-source breakdown? Good case for capacitor-coupled output, eh what? Amplifier overcurrent protection is no good now! Hopefully your speaker will survive the single initial thump. But it will probably be burnt out with about 8 amps DC flowing (ie 65V supply/8Ω speaker). Consider those very fast fuses sold for thyristor protection, but put them in the supply rails, not the speaker lead, or use over-current-circuit breakers or relays, or current-limited regulated power supplies.

Feedback philosophy

Fig. 9 is the complete block diagram of the whole amplifier with the feedback section H "closing the loop". The idea of a negative feedback amplifier is that the forward open loop gain G (from difference stage to output) is quite high while the feedback gain H is (usually) less than one, giving the overall amplifier low overall closed loop gain T, from input to output.

The purpose is to achieve a pure, stable, constant overall gain T, free of the errors, non-linearities, distortions and unpredictability of the forward gain. But there is a catch — the moment we close any loop we run the risk of instability.

Just how we calculate closed loop gain T and predict whether or not it will be

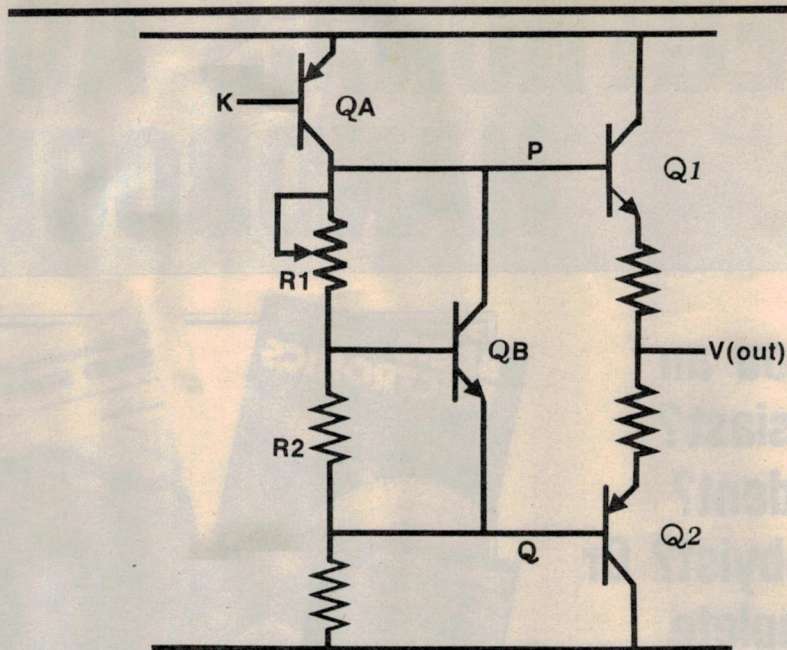


Fig. 8: a method of over-temperature protection for output transistors Q1, Q2. If we develop the bias for the output stage using the "Vbe multiplier" QB (see Fig. 3 last month), we can mount plastic-cased QB on the output stage heatsink. High output temperature will heat QB, reducing the bias developed between P and Q and thus reducing the output current.

stable needs exactly the theory explored in parts 1 and 2 of this series (EA, March, April 1984). Readers overcome by enthusiasm are invited to re-read those sections. In case someone has stolen your copy, a summary would go something like this:

Fig. 10 summarises all possible negative feedback closed loop systems, using G to symbolise the gain of all forward sections, ie, difference stage, amplifier, bias and output stage all

lumped together. H is the feedback "gain" (often a fraction) measured from the output back to the negative input of the difference stage. This figure uses the usual symbols; the circle represents the "act of comparison" of the difference stage; but any gain of the difference stage is lumped in with G. The signal called "ERROR" is the difference between input and the feedback "FB". If H were a simple voltage divider with "gain" equal to say one-fifth, then FB

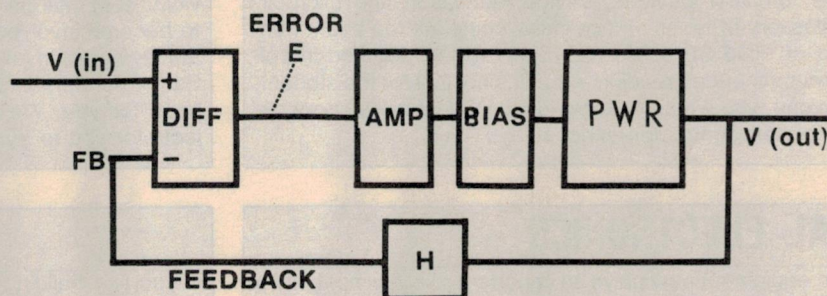


Fig. 9: this block diagram of a complete power operational amplifier assembles all the sections previously discussed. The feedback loop is closed by H. G is the gain from Error E to V(out), T the gain from V(in) to V(out).

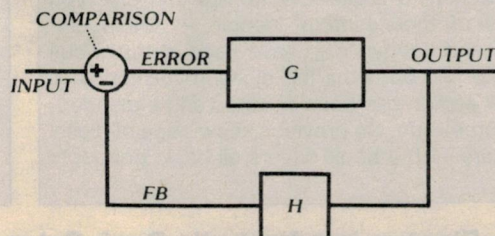


Fig. 10: the general in-phase (non-inverting) feedback system summarises all possible cases.

ELECTRONICS AUSTRALIA HANDBOOKS

Are you an
enthusiast?
A student?
A hobbyist? Or
a complete
beginner?



Whatever your
interest in
electronics,
we've a book
to suit
your needs!

FUNDAMENTALS OF SOLID STATE

Now in its second reprinting — which shows how popular it has been! It provides a wealth of information on semiconductor theory and operation, delving much deeper than very elementary works but without the maths and abstract theory which make many of the more specialised tests heavy going. It begins with atomic theory, diode types, unijunction, field effect and bipolar transistors, thyristor devices, device fabrication and microcircuits. A glossary of terms and an index complete the book. Fundamentals of Solid State has also been widely adopted in colleges as recommended reading — but it's not just for the student, it's for anyone who wants to know just a little bit more about the operation of semiconductor devices.

DIGITAL ELECTRONICS

Electronic equipment now plays an important role in almost every field of human endeavour and every day, more and more electronic equipment is "going digital". Even professional engineers and technicians find it hard to keep pace. In order to understand new developments, you need a good grounding in basic digital concepts, and Introduction to Digital Electronics can give you that grounding. Tens of thousands of people — engineers, technicians, students and hobbyists — have used the previous editions of this book to find out what the digital revolution is all about. The new fourth edition has been updated and expanded, to make it of even greater value. No previous knowledge of digital electronics is necessary — the book covers all basic concepts from scratch.

BASIC ELECTRONICS

As a basic text for the electronics enthusiast, Basic Electronics is almost certainly the most widely used manual on electronics fundamentals in Australia. It is used by radio clubs, in secondary schools and colleges, and in WIA youth radio clubs. It begins with the electron, introduces and explains components and circuit concepts and progresses through radio, audio techniques, servicing test instruments, television, etc. If you've always wanted to become involved in electronics, but have been scared off by the mysteries involved, let Basic Electronics explain them to you. Easy-to-understand diagrams and text make this the perfect book for you. We've even included five simple electronic projects for you to try your hand at building!

PROJECTS & CIRCUITS

If you like building electronic projects in your spare time, you can't afford to miss out on this exciting book of popular projects. Just look what's inside! **Audio & Video projects:** Video Amplifier for Computers and VCRs; Video Enhancer; Vocal Cancellor; Stereo Simulator for Tuners and VCRs; Guitar Booster for Stereo Amplifiers. **Automotive Projects:** Transistor-assisted Ignition System; Breath Tester; Low Fuel Indicator; Speed Sentry; Audible Turn Indicator. **Mains Power Control Projects:** Musicolour; Photographic Timer; Driveway Sentry; Touch-lamp Dimmer. **Power Supplies and Test Equipment:** Battery Saver for Personal Portables; Dual Tacking $\pm 22V$ Power Supply; $3\frac{1}{2}$ -Digit LCD Capacitance Meter; In-Circuit Transistor Tester. Plus EA's 10-year project index!

Available from: Electronics Australia Book Sales, 140 Joynton Avenue, Waterloo, NSW 2017.
Phone (02) 663 9999.

OP AMPS Explained

would be simply one-fifth of the output.

To calculate closed loop overall gain T, from input to output:

$$\text{Output} = G \times \text{Error}$$

$$\text{Error} = \text{Input} - \text{FB}$$

$$= \text{Input} - (\text{Output} \times H)$$

$$\text{Output} = G \times [\text{Input} - (\text{Output} \times H)]$$

$$= (G \times \text{Input}) - (\text{Output} \times GH)$$

$$\text{Output} + (\text{Output} \times GH) = G \times \text{Input}$$

$$\text{Output}$$

$$\text{Output} (1 + GH) = G \times \text{Input}$$

$$\frac{\text{Output}}{\text{Input}} = \frac{G}{(1 + GH)} = T$$

Furthermore, if G is a large number, ie a high forward gain, then the "one" in (1 + GH) doesn't make much difference and:

$$T = \frac{G}{1 + GH}$$

$$T = \frac{G}{GH} \text{ approx}$$

$$T = \frac{1}{H} \text{ approx}$$

Readers please pause, take a deep breath, then plunge in again. As H commonly consists of a handful of passive components like resistors, then H and hence T is very stable, constant and free of distortion, non-linearity or other nasties. That beautiful starry-eyed description turns out to be only an approximation because:

- (1) Forward gain G drops off at higher frequencies because of natural time constants and delays.
- (2) Phase angle delays arise from the same cause.
- (3) Hence G is not a simple number, it is some function of frequency. Being more than a simple gain, we therefore call G a "Transfer Function".
- (4) Instability occurs if the phase delay in a feedback circuit happens to be 180° at some frequency, as 180° shift of a sine wave is equivalent to phase reversal making the feedback positive instead of negative. The output then goes completely out of control.

Because there will always be some

frequency at which loop phase delay is 180°, to ensure stability (ie prevent oscillation) you must add some components to reduce the loop gain to less than unity at that frequency. This usually means aiming for a loop gain falling at high frequency by just the right amount. Also auxiliary impedance loads are often used to ensure stability under different loads and conditions.

Fig. 11, the EA 20 watt Utility Amplifier (described EA Nov, 1984, p 100) illustrates many points discussed in this series. Q4 is the difference stage with input at base and feedback at emitter. Q3 is the amplifier while Q5, a Vbe multiplier, forms the bias network adjusted by VR1. Darlington emitter followers Q1 and Q2 provide (approximately) unity gain output power stage with capacitor coupling to the load. Low frequency response is ensured by the large size (1000µF) capacitor chosen.

Stability is ensured by the 82pF capacitor from Q3 collector to base. This forms another auxiliary local negative feedback loop just around this transistor, reducing its gain at high frequencies at sufficient slope. As well, to prevent instability when "funny" loads are driven, the auxiliary load, 4.7Ω in series with 0.1µF, is permanently connected across the output. Such precautions are useful if loads like high impedance headphones or capacitive speakers are used.

The Playmaster Series 200 high quality, high power audio amplifier (refer EA, Jan, 1984) is an excellent example of

much of the theory we have been considering. Q1, Q2 form the input difference stage configured as a long tail pair using Q3 as a high impedance active tail. Note the use of PNP transistors, and push-pull or differential output to the high gain amplifier Q4, Q5, a second LTP which has the current mirror Q6, D3 as a high impedance load.

The 500Ω potentiometer is the bias circuit for the complementary Parallel Source Follower (approx unity gain) output FETs Q7, 8, 9, 10. Because the current mirror Q6 is such a high impedance load, the signal lost across the 500Ω pot is insignificant. Hence even harmonics due to unequal top-bottom drive are extremely small. The feedback path (which we have called H) consists of a simple resistive voltage divider at audio frequencies, using 22kΩ and 1kΩ ohms. Hence:

$$H = 1k \text{ ohm} / (22k \text{ ohm} + 1k \text{ ohm})$$

$$H = 1/23 \text{ (at audio freq)}$$

Because G for this design is very high (two long tail pairs and current mirror) then:

$$T = 1/H = 23$$

should be an excellent approximation, enabling the FB network to reduce distortion to very low levels.

At zero frequency, ie DC, H reverts to 1.0 (for DC stability) by the action of the 47µF, 16VW capacitor.

Next month we'll look at some special power op amps, including motor and lamp drivers, variable class and nested differentiating feedback loop audio amplifiers. Bye!

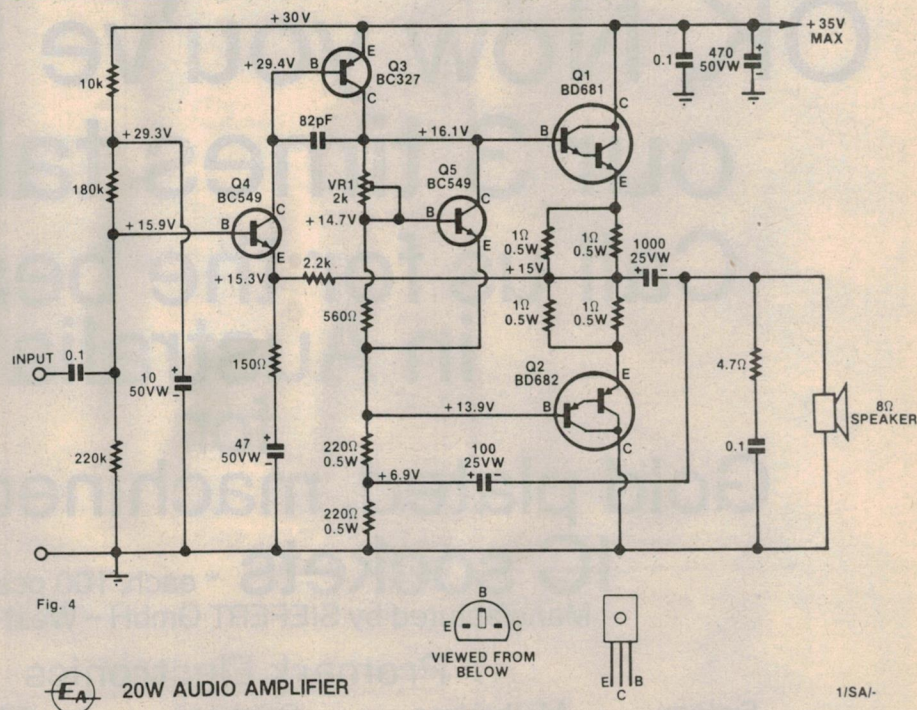


Fig. 4

EA 20W AUDIO AMPLIFIER

Fig. 11: circuit diagram for the EA 20 watt amplifier. Note the Vbe multiplier circuit (Q5) and Darlington emitter followers Q1 and Q2.

$$6 \times 3 = 18\text{¢}$$

$$8 \times 3 = 24\text{¢}$$

$$14 \times 3 = 42\text{¢}$$

$$16 \times 3 = 48\text{¢}$$

$$18 \times 3 = 54\text{¢}$$

$$20 \times 3 = 60\text{¢}$$

$$22 \times 3 = 66\text{¢}$$

$$24 \times 3 = 72\text{¢}$$

$$28 \times 3 = 84\text{¢}$$

$$40 \times 3 = 1-20\text{¢}$$

$$64 \times 3 = 1-92\text{¢}$$

OK, Now you've learned
our 3 times tables*

Call us for the best deal
in Australia!

for

Gold plated, machined contact
IC sockets

* each, 100 pcs. min. + tax
Manufactured by SIEFERT GmbH - West Germany

Promark Electronics

Sydney
439 6477

Melbourne
878 1455

Brisbane
(008) 22 6226

Adelaide
(008) 22 6226

Perth
328 9755

Stick it!

**SAVE HEAPS —
BUY YOUR
MEMORIES BY
THE STICK!**

**PREMIUM
GRADE
PRODUCT AND
HEAPS OF
STOCK!!!**

64K D-RAM

PART No.	PRICE	QTY. PER STICK
HM 4864-150	\$ 79.00*	25
UPD 8748D	\$163.00*	10
UPD 8749D	\$200.00*	10
M5L 2764K	\$139.00*	14
HM 6264 LP-15	\$210.00*	10

**Promark
Electronics**

SYDNEY 439-6477

P.O. BOX 381, CROWS NEST, NSW 2065.

MELBOURNE 878-1255

P.O. BOX 115, NUNAWADING, VIC. 3131.


**ANYWHERE ELSE IN
AUSTRALIA CALL
TOLL-FREE (008) 226-226**

* Plus 20% Sales Tax + \$4.00 Freight.

BANKCARD O.K.

WHAT? ANOTHER BOOK ON PERSONAL COMPUTERS?

- * Behind the myths and jargon
- * Data processing made simple
- * Software and hardware explained
- * How to care for and keep your personal computer

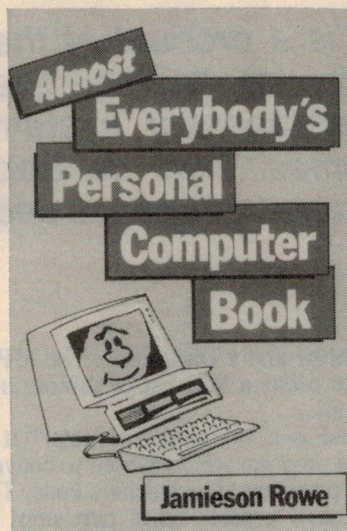

**JUST
\$8.95
+ p&p \$1.00**

You won't need a degree in mathematics or any previous knowledge of electronics or computers to understand **ALMOST EVERYBODY'S PERSONAL COMPUTER BOOK**. It will not make you an instant expert on every aspect of personal computers, but it will give you a good basic understanding of what they're all about.

☐ Please send me copies of "ALMOST EVERYBODY'S PERSONAL COMPUTER BOOK"

Name Address

. Postcode Phone

☐ Cheque*/Money Order* enclosed for \$9.95, or bill my ☐

Bankcard ☐ American Express Card ☐ Mastercard

Card No.

□□□ □□ □□□ □□□□□□

Card expiry date Signature

Detach this coupon and mail it in an envelope to: FREEPOST No. 4, THE FEDERAL PUBLISHING CO. P/L, P.O. Box 227, WATERLOO 2017.
(No postage stamp required if posted in Australia.) *Make cheques/money orders payable to THE FEDERAL PUBLISHING CO. P/L.

MPF-IP

Micro-Professor

development system

The MPF-IP Micro-Professor is a product of the Multitech Industrial Corporation of Taiwan. The MPF-IP is a complete microprocessor system based on the Z-80. It comes with detailed instruction manuals and a full range of options and accessories.

by FRANCO UBAUDI

The Micro-Professor is not an evaluation kit. It is a multi-purpose product intended to satisfy the needs of Education, Control, Interfacing and Development. There are two models, the MPF-I and the MPF-IP. We reviewed the latter version.

The MPF-IP is one neat board measuring 157 × 220mm which accommodates a Z-80 processor chip, two 2K RAMs, one 8K ROM, two I/O port ICs and 12 other ICs for such tasks as decoding. The board is fitted with a 49-key keyboard with QWERTY layout and a 20-digit, 14-segment alphanumeric green vacuum fluorescent display.

Also included on the board is a cassette interface for program storage and retrieval and a speaker is provided for system and programmer use. With the speaker, the user may generate programs for producing anything from alarm sounds through to music.

The entire board assembly is enclosed in a plastic binder which can be opened and closed like a book. The unit is powered from a 9V DC plugpack. Battery back-up for the RAM is included to store programs when power is removed from the unit.

Included with the basic MPF-IP are three softcover manuals. There is a 130-page User's manual, a Monitor Program Source Listing, and an Experiment Manual. The monitor program manual contains a listing of the monitor program in both Z-80 assembler mnemonics and Z-80 assembled hex code. Included in the monitor program is a full Two-Pass Assembler, a Line

Assembler and a Disassembler. The MPF-IP also offers a long list of subroutines, 44 in all.

What is a two pass assembler? It is itself a program which is used to convert other programs into machine code. The conversion process takes two steps or passes, hence the name. In the first pass the assembler produces a symbol table which contains all the labels and their corresponding values found in the program. In the second pass the assembler uses the symbol table to generate the actual machine code, or as it is sometimes called, the object code.

Because the two-pass assembler generates a symbol table during execution, more memory is required to produce the machine code program than is actually required to store it. Therefore, in the situation when there is insufficient memory for the two-pass assembler to work a one-pass assembler may be used. With this assembler, as each program line is entered the line is also assembled. An advantage of this is that your program is also checked for instruction errors as you enter it.

The function of the disassembler is simply to produce a mnemonic program from Z-80 hex machine code. It is a very useful tool for reading EPROM's.

Useful Commands

You can enter hex code directly by using the M command. The M command is simply a display and alter function for the contents of memory. Therefore, with this command you can enter a complete program or change only certain locations. An example of its use is,

<M>=FB00: 12 13 14,

to insert 12 into the location FB00, while 13 and 14 are placed into successive locations. The F command is used to insert data into a specified memory range. For example if you required the hex value 34 to be placed in every memory location from FC00 to FD00, the F command will do the job. The command line to do it is

<F>=FC00 FD00 34.

Another command is the R command, to display and alter the contents of registers. The Z-80 has quite a lot of internal registers in comparison to other CPUs. Actually the Z-80 has 22 separate registers in all. The use of the R command is as follows,

R (return)

to display all registers. To display just the C register for example, the command R : C (return) is used.

Next is the W command which is used for storing programs or data on tape. Its format is as follows:


W <starting address> space <ending address> space <filename> (return).

To retrieve data or programs from tape, the L command is used. Its format is

L <filename> (return).

The read program is stored into the same location in RAM as it originally occupied. As well, a checksum is performed by the MPF-IP. The operation of the checksum is as follows: when a program is originally stored, a checksum value is calculated and also stored on the tape. When the program is read back into the MPF-IP a checksum is again calculated by the system; if both checksums agree all is well, otherwise an error message is issued.

A useful command for the inexperienced programmer is the J command. This command is used for the calculation of relative addresses for jump instructions. Another useful command is the I command, which is used for inserting data into memory. For example data 1 2 3 4 5 is inserted at location F800

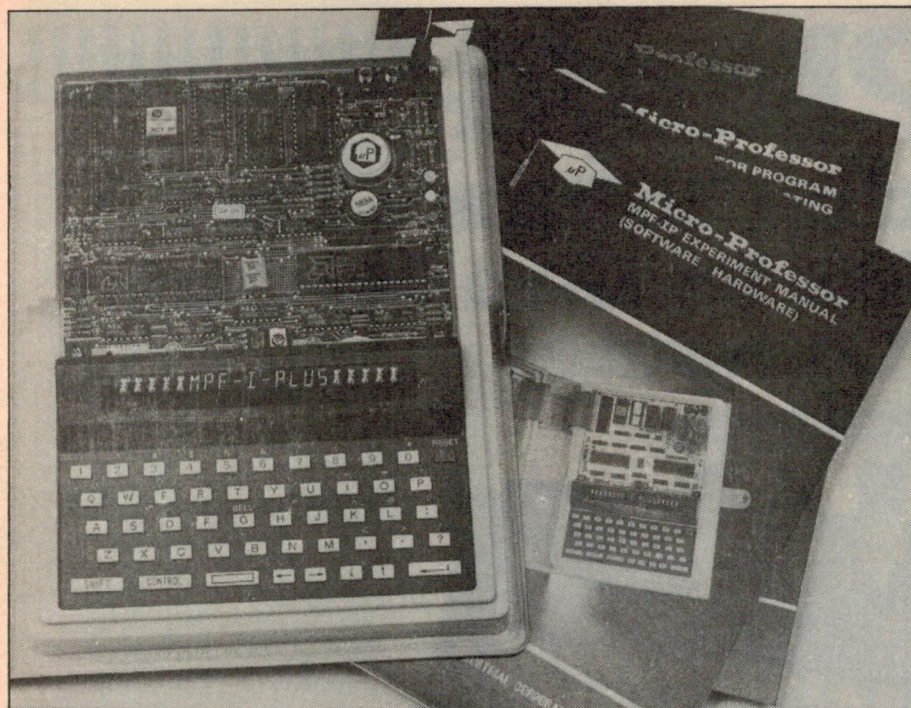

The Micro-Professor is a single board system which comes complete with three manuals.

as follows:

<I> = FE00/

<I> = F800 1 2 3 4 5


Simple isn't it? But the value of the I command is in that the data is "inserted", hence any data already present is shifted into higher memory addresses rather than over written.

A complementary command to the I command is the D command. This command is used to delete data from memory in much the same manner as the I command is used to insert data.

Debugging

To help the user debug programs, two commands are provided by the MPF-IP. The first is the B command which is used to set and clear breakpoints within a program. Note that only one breakpoint can be used at any time.

The second debugging method is provided by the S command. With this command you can execute a program one instruction line at a time. Therefore each time you press the S key another instruction line is executed.

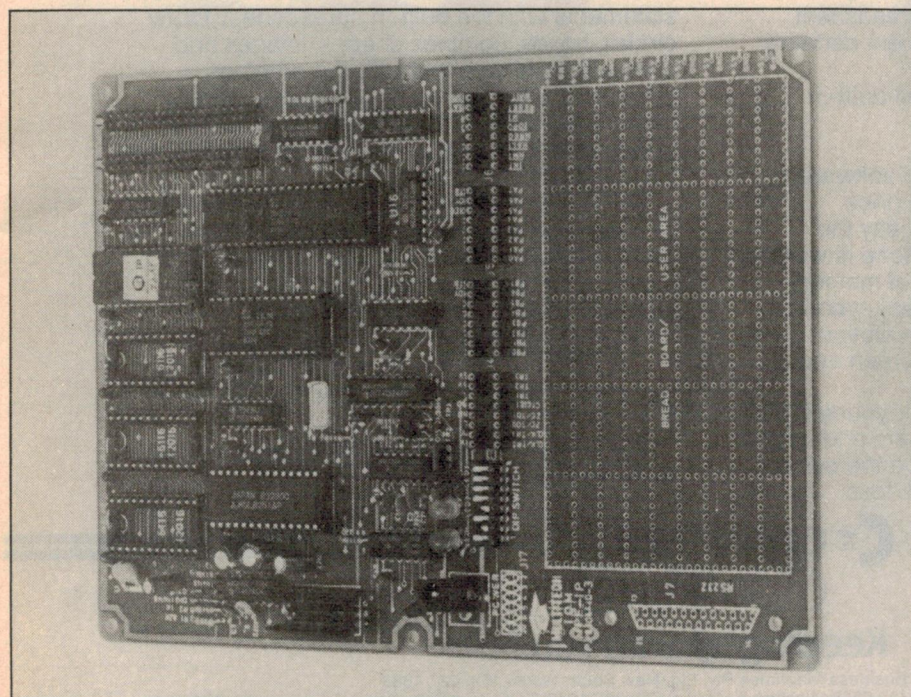

This the memory expansion board for the MPF-IP.



Disco World Pty. Ltd.

300 Main Street, Lilydale
P.O. Box 509, Lilydale 3140
(03) 735-0588

AMPLIFIERS

ZPE Series II (500W) \$1300.00

DISCO MIXERS

Citronic SM 330 \$695.00
Arista \$330.00

JUMBO STROBE

FLA 701 \$153.48
Scanner S101 \$99.45
Scanner Bar S104S \$342.86

HELICOPTER

2 ARM Spinner \$198.00
4 ARM Spinner \$289.00
8 ARM Spinner \$497.89
UFO 324 \$1698.55



PINSPOT

PS 112S \$48.94
PS 112L \$58.99



MIRROR BALLS

MB 008-8" \$37.20
MB 012 \$64.58
MB 014 \$93.54
MB 018 \$125.34
MB 020 \$153.79

SMOKE MACHINE


Great for Special Effects
\$328.00

MIRROR BALL MOTORS

AC 240V \$29.99

ROLLING LIGHTS

8 x 4515 lamps \$958.95
24 lamps horizontal \$1985.45
24 lamps vertical \$1985.45



COSMOS LIGHT

24 lamps \$1980.68
Half Ball rotary light
6 lamps \$357.28



LAMPS all colours, soft glass

ES 240V 60W
box of 25 \$75.00
BC 240V 40W
box of 100 \$77.00
BC 240V 25W
box of 100 \$75.00

Bankcard & Mail Orders. Power Cords
not included. Trade Enquiries Welcome.
Send S.A.E. for free price list.

Mention this ad E.A. One for further
discount. Valid until May 1, '85.

|||||Plus/4|||||

Introducing Software That Comes With Its Own Built-In Computer



Word processing, electronic spreadsheet, graphic plotting and file management certainly need no introduction.

But a computer that has them all built-in certainly does.

Especially for under \$600*.

You could easily say the built-in software alone is worth a lot more than the price.

But then again you could easily say the Commodore PLUS/4 computer alone is worth a lot more than the price. With 64K of memory, 60K fully usable, full size typewriter keyboard, four separate cursor keys, high resolution colour graphics, extended BASIC, split screen and windowing capabilities.

Turn on the power and judge for yourself. Write and edit letters, reports, papers and novels with the built-in wordprocessor. Do the books, the budgets, the projections, profit/loss

statements with the built-in spreadsheet. Draw circles, boxes, complex shapes, images and combine them with text with the graphics program. Collect, store, organize and retrieve information such as mailing lists, inventories, personal files, business files and recipes with the file management program.

Go from one program to another at the touch of a key. For not only are they built into the computer, they're built into each other. So, for example, in one document, you can go from words to numbers to graphs to names and addresses. In just a matter of moments.

The Commodore PLUS/4. The first new computer that doesn't have one new thing about it. It has four.

For further information contact your nearest Commodore Dealer.

*Recommended retail price

commodore
COMPUTER

Keeping up with you.

Commodore Business Machines Pty. Ltd. New South Wales: (02) 427 4888
Victoria/Tasmania/South Australia: (03) 429 9855 Western Australia: (09) 389 1266 Queensland/Northern Territory: (07) 393 0300

BMS/CC365

MPF-IP Micro-Professor


Text Editor

To enter the editor you hold the E key down while pressing the control key, or control E for short. After typing control E, you will be prompted to enter a starting and ending address for the text buffer. The editor will now prompt you to start entering your program. To exit from the editor you just hit the return key twice. If you need to re-enter the text editor the R command can be used.

With the R command you can re-edit a program that already exists in the text buffer. Therefore, when you use the E command to enter the editor the MPF-IP automatically resets the text buffer pointer, which means any new program entered is written over the top of any old program. That's the difference between the E and R editor entry commands. To exit from the editor to the monitor the Q command is used.

There are many other commands available for the editor, however to save space they will only briefly be mentioned in point form.

- * To insert lines when in the editor there is an I command.
- * To delete a line the D command is available.
- * To display n number of lines in the file from the current line use P n command.
- * To display all lines in a file the Z command is used.
- * To move the cursor to the bottom of a file use the B command.
- * To move the line pointer down to the nth line in the file use the G n command.
- * To move the line pointer up n lines use the U n command.
- * To move the line pointer down n lines use the N n command.
- * To move the line pointer to the top of a file use the T command.
- * To print the line number of the line currently displayed use the L command.
- * To locate a particular string in a file use the F /???/ command, where ??? is the string to be located.
- * To change a string use the C /???/XXX/ command to change the string ??? to XXX.
- * To display the addresses of the top and bottom of a file use the S command.
- * To toggle the state of the printer control (ON or OFF) use the X command.
- * To write data from memory to tape use the W FILENAME command, where FILENAME is the file name.
- * To read data from tape into memory use the R FILENAME command.

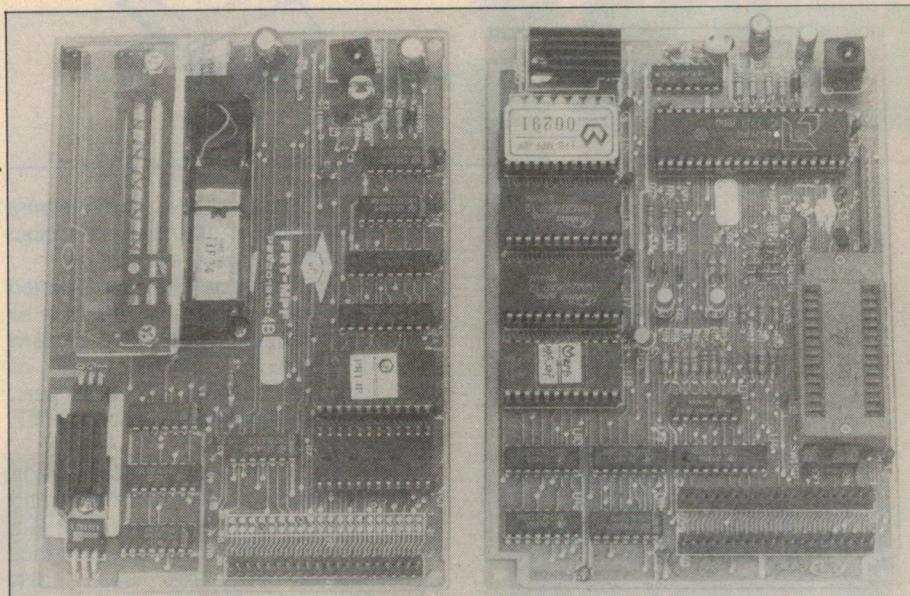

This is the MPF-IP EPROM programmer board.

Accessories for the MPF-IP

Accessories for the MPF-IP include a Basic interpreter resident in an 8K ROM which may be plugged into a spare socket on the PCB. This version of Basic included floating point arithmetic.

If you wish to use the MPF-IP as a dedicated controller, a ROM containing Forth programming language is also available. Forth provides the user an expandable, structured, stack-oriented language which is programmed in Reverse Polish Notation. Relative to other languages Forth is simple to use for control applications; even non-programmers can use it successfully.

A thermal printer capable of printing 20 characters a line is also available. Incorporated in the printer are several useful features, such as a memory dump utility and Z-80 disassembler listing utility.

An EPROM programmer board is available. This board is capable of accepting currently used 1K, 2K, 4K and 8K EPROMs which operate from a single +5V supply. The EPROM board allows you to read data from EPROM memory into a RAM buffer, then verify, display, list or modify the data. You can also write data from RAM to EPROM as required and delete or insert at will.

An input-output and memory expansion board is another accessory for the MPF-IP. Included on this board is a counter/timer chip (CTC), a communications interface chip (USART 8251) and a parallel I/O chip (PIO). Also included are 6K RAM and 4K ROM locations if extra memory is required.

Other accessories available for the MPF-IP are a speech synthesiser and a sound generator board.

Conclusion

When you consider all the features that have been mentioned above, the Micro-Professor is definitely good value for money. The quality of the construction and the performance are high. In fact there is only one noticeable short-coming in the Micro Professor and that is in the documentation. It appears to suffer from being translated from Chinese. Another small drawback is the requirement for a separate plugpack for each accessory board added to the MPF-IP.


Anyone who has an interest in either learning about microprocessors or has the need for a development system or a means of small scale process control in an industrial situation can make good use of the MPF-IP.

Prices for the MPF-IP and its accessories are as follows:

MPF-IP including manuals	\$248.40
IOM-MPF-IP I/O & memory expansion board	\$158.40
EPB-MPF-IP EPROM Programmer board	\$190.80
SSB-MPF-IP TMS5220 based Speech Synthesis board	\$190.80
PRT-MPF-IP Thermal Printer	\$126.00
SGB-MPF-IP Sound Generation board	\$126.00
SSB-VOC-IP 1,200 Word Vocabulary set	\$672.00
BASIC-MPF-IP 8K Basic Interpreter ROM	\$54.00
FORTH-MPF-IP 8K ROM	\$54.00

Further information on the Micro-Professor range of products can be obtained from the Australian distributors, Emona Computers Pty Ltd, 720 George St, Sydney. Phone (02) 212 4599.

Books & Literature



Interfacing the Commodore PET

PET INTERFACING, by James M. Downey & Steven M. Rogers. Published by Howard W. Sams & Co, Inc, USA. Soft covers 135 x 215mm, 262 pages, illustrated with diagrams, pictures and tables. ISBN 0-672-21795-3.

This book has two authors, Dr James M. Downey, Professor in Medical Physiology whose work in this area involves the use of computers, and Steven M. Rogers, a technical representative for the Eastman Kodak Company, where his work involves high-speed computer controlled automatic photographic printers and negative handling systems for the photofinishing

industry. Together, these two authors offer a great deal of practical knowledge on computer controlled systems.

As the title suggests, this text is aimed at Commodore Pet owners but it is so well written that it could be used as a general reference. Three types of interfacing are covered: the user port, memory expansion port and the IEEE 488 port.

The book opens with an introduction to the PET microprocessor hardware and guides you through the construction of a breadboard circuit. Next are interface experiments with the user port, interfacing the PET by using the memory expansion port and interfacing the PET to a IEEE 488 port.

Note that the experiments in this book can be used with all versions of the PET computer that have a 25-by-40-character video display, including some of the older PET computers that have been upgraded with new ROMs.

Our review copy came from Jaycar Electronics.

Applications for your Apple II

MOSTLY BASIC: APPLICATIONS FOR YOUR APPLE II (Book 1), by Howard Berenbon. Published by Howard W. Sams & Co, Inc, USA. Soft covers, spiral bound, 215 x 280mm, 158 pages. Illustrated with diagrams and tables. ISBN 0-672-21789-9. \$14.95.

This book is written for the Apple II owner and contains 28 chapters filled with interesting and educational programs. Anyone who owns a different type of computer, provided it offers



Basic, will more than likely still be able to use these programs, either with little modification or none at all.

The book is split into five separate headings which are as follows: Real-time Applications, Educational, Programs, Business and Investment, Home Applications, Utilities and The Unusual. For example under the first heading is a telephone dialler. The program accepts the name of the person to be phoned, searches for the number and on finding the number dials it. A simple interface circuit for dialing the phone number is provided.

Other chapters under this heading are entitled: Combination Lock, Digital Stopwatch and the Time Machine.

Each chapter of this book is devoted to one program, so the reader need only read that which is of interest. To make life even simpler for the reader, each chapter is kept short and to the point. Each chapter begins with a brief introduction as to what the program is for. Any interface required is also mentioned and finally the method of use is discussed.

In summary, this is a well-written and useful text. Our copy came from Jaycar Electronics.

projects & circuits

Number 3

THE CONTENTS:

Audio, Video Projects

Video Amplifier for Computers and VCRs; Video Enhancer; Vocal Canceller; Stereo Simulator for Tuners and VCRs; Guitar Booster for Stereo Amplifiers.

Power Supplies & Test Equipment Battery Saver for Personal Portables; Dual tracking $\pm 22V$ Power Supply; $3\frac{1}{2}$ -Digit LCD Capacitance Meter; In-Circuit Transistor Tester.

Mains Power Control Projects

Musicolour; Photographic Timer; Driveway Sentry; Touch-Lamp Dimmer.

Automotive Projects

Transistor-Assisted Ignition System; Breath Tester Checks Blood Alcohol Level; Low Fuel Warning Indicator; Speed Sentry for Cars; Audible Turn Signal Indicator.

Miscellaneous

Nail Finder; Portable $3\frac{1}{2}$ -Digit Heart rate Monitor; 10 Year EA Project Index.

Available from "Electronics Australia", 140 Joynton Avenue, Waterloo, Sydney, 2017. **PRICE \$4.50** or by mail order: Send cheque to "Electronics Australia", PO Box 227, Waterloo, 2017.

PRICE \$5.40.






EA AM STEREO DECODER

AM stereo is now broadcast in Australia on an experimental basis. This add-on decoder works with the Motorola C-QUAM system. (EA Oct '84) 84MS10
Cat. K84101

\$24.95



TEMP PROBE

Can measure temperature from -50 to 150°C. It simply plugs into your multimeter - great for digital multimeters. Accuracy of 0.1°C resolution of 0.1°C. (ETI June '83) ETI 153
Cat. K41530


\$24.50



ELECTRONIC WATT METER

This unit will measure the power consumption of any mains appliance with a rating up to 3 kilowatts. It makes use of a special op amp called an 'output transconductance amp' or OTA. for short. (EA Sept. '83) 83WMS
Cat. 83082


\$89.95



PH METER KIT

Build this pH meter for the swimming pool season is here again! From swimming pools to fish tanks to gardening, this pH meter has many applications around the home. This unit features a large 3 1/2 digit liquid crystal display and resolution to 0.1 pH units, making it suitable for use in the laboratory as well. (EA Dec. '82) 82PH12
Cat. K82123

\$139



50 W AMPLIFIER MODULE

Cat. K44880

\$24.50




100 W AMPLIFIER MODULE

Cat. K44801

(Heatsink optional extra)

\$27.50



ELECTRONIC MOUSETRAP

This clever electronic mousetrap disposes of mice instantly and mercifully, without fail, and resets itself automatically. They'll never get away with the cheese again! (ETI Aug. '84) ETI 1524
Cat. K55240

\$29.95



1W AUDIO AMPLIFIER

A low-cost general-purpose, 1 watt audio amplifier, suitable for increasing your computer's audio level, etc. (EA Nov. '84)
Cat. K84111


\$9.95



READY-SET-GO LIGHTS

A simple project for starting slot car races, etc. It provides the traditional Red/Amber/Green lights with a random delay between the amber and green. (ETI Oct. '84) ETI 277
Cat.

\$24.95



40 W INVERTER

This 12 240 V inverter can be used to power up mains appliances rated up to 40 W, or to vary the speed of a turntable. As a bonus, it will also work backwards as a trickle charger to top up the battery when the power is on. (EA May '82) 82IV5
Cat. K82050

\$49.50



COMPUTER DRIVEN RADIO-TELETYPE TRANSCIVER

Here's what you've been asking for, a full transmit-receive system for computer driven radio teletype station. The software provides all the latest "whizz-bangs" like split-screen operation, automatically repeating test message, printer output and more. The hardware uses tried and proven techniques. While designed to team with the popular Microbee, tips are available on interfacing the unit to other computers. (ETI Nov. '84) ETI 755
Cat. K47550


\$139.00



ELECTRIC FENCE

Mains or battery powered, this electric fence controller is both inexpensive and versatile. Based on an automotive ignition coil, it should prove an adequate deterrent to all manner of livestock. Additionally, its operation conforms to the relevant clauses of Australian Std 3129. (EA Sept. '82) 82EF9
Cat. K82092


\$19.50



MUSICOLOR IV

Add excitement to parties, card nights and discos with EA's Musicolor IV light show. This is the latest in the famous line of musicolors and it offers features such as four channel "color organ" plus four channel light chaser, front panel LED display, internal microphone, single sensitivity control plus opto-coupled switching for increased safety. (EA Aug. '81) 81MCS
Cat. K81080

\$84.00



RAILMASTER PULSE POWER TRAIN CONTROLLER

Here's an up-to-the-minute train controller offering all the most desirable features including inertia, full overload protection, walk-around throttle and excellent low-speed running characters. Probably the best controller available, regardless of the cost! (EA Sept. '84) 84TC9
Cat. K84091


\$79.50



SOUND SIMULATOR FOR MODEL TRAINS

Fancy a diesel sound simulator for your model train layout? This circuit models inside the train for added realism and even varies its 'speed' according to the throttle setting. (EA Nov. '84)
Cat. K84110

\$18.00



MODEL ENGINE IGNITION SYSTEM

Get sure starts every time and no more glow plug burnouts on your model engines. (ETI June '83) ETI 1516
Cat. 55160


\$49.50



MICROBEE SERIAL-TO-PARALLEL INTERFACE

Most microcomputers worth owning have an 'RS232' connector, or port, through which serial communications (input/output) is conducted. It is a convention that, for listing on a printer, the BASIC LIST or LPRINT command assumes a printer is connected to the RS232 port. Problem is, serial interface printers are more expensive than parallel 'Centronics' interface printers. Save money by building this interface. (ETI Jan. '84) ETI 165
Cat. K46750

\$59.00



LOW OHMS METER

How many times have you cursed your Multimeter when you had to measure a low-value resistance? Well with the "Low Ohms Meter" you can solve those old problems and in fact measure resistance from 100 Ohms down to 0.005 Ohms. (ETI Nov. '81) ETI 158
Cat. K41580


\$34.50



RADIOTELETYPE CONVERTER FOR THE MICROBEE

Have your computer print the latest news from the international shortwave news service. Just hook up this project between your short wave receivers audio output and the Microbee parallel port. A simple bit of software does the decoding. Can be hooked up to other computers too. (ETI Apr. '83)
Cat.

\$20.00



50V 5A LABORATORY POWER SUPPLY

New switchmode supply can deliver anywhere from three to 50V DC and currents of 5A at 35V or lower. Highly efficient design. (EA May/June '83) 83PS5
Cat. K83050

\$149



HEADPHONE AMPLIFIER

PRACTICE WITHOUT ANNOYING THE FAMILY! If you play any type of electronic instrument, this headphone amplifier will surely interest you. It will let you practice for hours without upsetting the household or you can use it to monitor your own instrument in the midst of a rowdy jam session. (EA Feb. '84) 83MA11
Cat. K83011

\$28.00



150W BASS AMP

This guitar amp for impeccable bass players features many facilities found on expensive 'commercial' ones. It delivers 150 watts into 4-ohms, has a t-band graphic limiter, line out and bi-amp facilities. (ETI Aug. '84) ETI 1410
Cat. K54100

\$299



EFFECTS UNIT

An 'effects unit' that can create phasing, flanging, echo, reverb and vibrato effects. (EA June '83) 83GA6
Cat. K83060


\$75.00



LAB SUPPLY

Fully variable 0-40V current limited 0-5A supply with both voltage and current metering (two ranges: 0-0.5A/0-5A). This employs a conventional series-pass regulator, not a switchmode type with its attendant problems, but dissipation is reduced by unique relay switching system switching between laps on the transformer secondary. (ETI May '83) ETI 163
Cat. K41630


\$175.00



CAR IGNITION KILLER

Most car burglar alarms are easily circumvented, but not this cunning "Ignition Killer". This sneaky anti-theft device uses a 555 timer to place an intermittent short circuit across the points. Until disabled by its hidden switch the circuit effectively makes the car undrivable — a sure deterrent to thieves! (EA Feb. '84) 84AU1
Cat. K84010

\$16.95



MOTORCYCLE INTERCOM

Over 300 SOLD! Motorcycling is fun, but the conversation between rider and passenger is usually just not possible. But build this intercom and you can converse with your passenger at any time while you are on the move. There are no "push-to-talk" buttons, adjustable volume and it's easy to build! (EA Feb. '84) 84MC2
Cat. K804020

\$45.00



PHONE MINDER

Dubbed the Phone Minder, this handy gadget functions as both a bell extender and paging unit, or it can perform either function separately. (EA Feb. '84) 84TP2
Cat. K84021

\$24.00



MOSFET POWER AMPLIFIER

Employing Hitachi Mosfets, this power amplifier features a 'no compromise' design, and is rated to deliver 150 W RMS maximum and features extremely low harmonic, transient and intermodulation distortion. (ETI Jan. '81) ETI 477
Cat. K44770

\$67.50



ZENER TESTER

A simple low cost add-on for your multimeter. This checks zeners and reads out the zener voltage directly on your multimeter. It can also check LEDs and ordinary diodes. (ETI May '83) ETI 164
Cat. K41640

\$9.50



SLIDE CROSS-FADER

Want to put on really professional slide show? This slide cross-fader can provide smooth dissolves from one projector to another, initiate slide changing automatically from an in-built variable timer, and synchronise slide changes to pre-recorded commentary or music on a tape recorder. All this at a cost far less than comparable commercial units. (EA Nov. '81) 81SS11
Cat. K81110

\$85.00



BIPOLAR PROM PROGRAMMER

Every digital workshop should have one! Can be used to program the popular fusible-link PROMs like the 74S188/288, 82S23 & 82S123 etc. (ETI June '83) ETI 1688
Cat. K46880

\$49.50



PARABOLIC MICROPHONE

Build a low cost parabola, along with a high gain headphone amplifier to help when listening to those natural activities such as babbling brooks, singing birds or perhaps even more sinister noises. The current cost of components for this project is around \$15 including sales tax, but not the cost of batteries or headphones. (EA Nov. '83) 83MA11
Cat. K83110

\$15.00



DUAL TRACKING POWER SUPPLY

Build around positive and negative 3-Terminal Regulators, this versatile dual tracking Power Supply can provide voltages up to 24V. In addition the Supply features a fixed +5V 0.9A output and is completely protected against short circuits, overloads and thermal runaway. (EA March '82) 82PS2
Cat. K82030


\$87.50



VIDEO ENHANCER

Like's SOLD! 100's SOLD! Take tone controls in a hi-fi amplifier, touch up the signal with this Video Enhancer. (EA Oct. '83) 83VE10
Cat. K83100

\$35.00



30 V/1 A FULLY PROTECTED POWER SUPPLY

The last power supply we did was the phenomenally popular ETI-131. This low cost supply features full protection, output variation from 0V to 30V and selectable current limit. Both voltage and current metering is provided. (ETI Dec. '83) ETI 162
Cat. K41620

\$62.50



ELECTRIC DUMMY LOAD

With this unit you can test power supplies at currents up to 15 Amps and voltage up to 60 Volts. It can "sink" up to 200 Watts on a static test and you can modulate the load to perform dynamic tests. (ETI Oct. '80) ETI 147
Cat. K41470

\$109



DIRECTIONAL DOOR MINDER

Most electronic door minders function by having a beam of light shining across doorway. If interrupted, but are incapable of detecting whether the light beam is broken by a person entering or leaving the room, this project overcomes that problem with the aid of digital logic. (ETI Nov. '84) ETI 278
Cat. K42780

\$29.95



Rod Irving Electronics

425 HIGH STREET,
NORTHCOTE VICTORIA.
Ph:(03)489 8866 489 8131
48-50 A'BECKETT STREET,
MELBOURNE VICTORIA.
PH:(03)347 9251
Mail Order and
correspondence:
P.O. Box 235
NORTHCOTE 3070

MAIL ORDER HOT LINE



(03) 481 1436



POSTAGE RATES	
\$1-\$9.99	\$1.50
\$10-\$24.99	\$2.00
\$25-\$49.99	\$3.00
\$50-\$99.99	\$3.50
\$100-\$199.99	\$5.00
\$200-\$499.99	\$7.50
\$500 plus	\$10.00

Comet road freight is extra.



VIDEO AMPLIFIER

Bothered by smeary colours, signal beats and RF interference on your computer display? Throw away that cheap and nasty RF modulator and use a direct video connection instead. It's much better! The Video Amplifier features adjustable gain and provides both normal and inverted outputs. Power is derived from a 12V DC plugpack supply. (EA Aug. '83) 83VA8
Cat. K83081


\$15.00



TRANSISTOR TESTER

1000's SOLD! Have you ever desoldered a suspect transistor, only to find that it checks OK? Trouble-shooting exercises are often hindered by this type of false alarm, but many of them could be avoided with an "in-circuit" component tester, such as the EA Handy Tester. (EA Sept. '83) 83TT8
Cat. K83080


\$15.00



FUNCTION GENERATOR

This Function Generator with digital readout produces Sine, Triangle and Square waves over a frequency range from below 20Hz to above 160Hz with low distortion and good envelope stability. It has an inbuilt four-digit frequency counter for ease and accuracy of frequency setting. (EA April '82) 82A03A/B
Cat. K82041

\$84.50



EPROM PROGRAMMER

EP1 No need for a Micro with EA's great Eprom Programmer suitable for 2716/2758 Eproms. (EA Jan. '82) 82EP1
Cat. K82013
With Textool Sockets

\$47.50

\$59.95

Errors and Omissions Excepted.

NEW PRODUCTS



Teac's new cassette decks

The latest Teac decks have just been released. Ranging in price from \$219 for the V-306C to \$549 for the R-666X, the machines have many impressive features.

The least expensive machine features a frequency response of 30-16,000Hz, with wow and flutter of .06%. The

V-430X and V-530X include dbx, with logic transport control for the 530 and one program skip for the 430.

At the top of the range are the R-555 and R-666X, both with auto reverse and logic transport control. The R-666X also features dbx, with both models boasting frequency response from 30-20,000Hz.

Teac Australia Pty Ltd, 115 Whiteman St, South Melbourne 3205. Phone 699 6000.

New security devices

GRM Wholesale has added three new products to its range of security equipment. From FM Security (UK) comes the IFM 120 passive infrared detector. This unit is a high-performance, versatile detector which is easy to use. It has a 12m range over a full 90° field of view.

C & K Systems (USA) have supplied the Dualtec II which combines

microwave and passive infrared detectors within a single unit. This improves the system immunity to false alarms. It is available in a number of range configurations up to 60m x 3m.

A stereo Doppler unit from Protech (USA) has two receiving channels, allowing it to sense distance moved rather than speed. The critical distance is preset at installation — any target which moves further than this distance will trigger the alarm.

GRM Wholesale Pty Ltd, 15-19 Boundary St, Rushcutters Bay.

Latching EPROMs from Intel

Built-in address latching is featured in the 87C64, a new 64K EPROM from Intel. This is an enhanced version of Intel's 27C64 EPROM.

The internal latching capability means that external latches — normally needed to interface the CPU to memory devices — can be eliminated from the circuit. This leads to a reduction in chip count and board size.

The 87C64 is the first in a series of latched memory products which Intel plan to release.

Intel Australia Pty Ltd, 200 Pacific Highway, Crows Nest 2065. Phone (02) 957 2744.

New range of solid state relays

Warburton Franki has recently introduced a new range of DC power solid state relays from the International Rectifier CRYDOM series. The devices can be driven from most logic circuits as they require less than 1.6mA at 5VDC. By means of an internal oscillator, the DC control signal has transformer isolation of 2500V from the output.

Warburton Franki are stocking 100 and 200 VDC versions ex-stock with 400 and 500 VDC versions available.

Warburton Franki, 199 Parramatta Rd, Auburn 2144. Phone (02) 648 1711.

New Philips CD player

Philips has announced the launch of a new audio CD player, the CD104. The compact dimensions of the unit are designed to fit in with the new Philips Midi range of hifi systems.

Main features of the CD104 include front loading (with a motorised loading drawer) and a liquid crystal display which can indicate the total number of tracks available and the total playing time. During play mode, the display indicates the track number and the elapsed time.

The CD104 has skip forward and reverse functions, both of which can be operated at three different speeds.

Philips Industries Holdings Ltd, 15 Blue St, North Sydney 2060. Phone (02) 925 3281.





Australian-made head cleaner

A revolutionary new cassette head cleaner has been unveiled by Goldring Audio Industries of Sydney. The Australian designed and manufactured head cleaner, called the FlexiBar, is a mechanical (non abrasive) type cleaner.

It is the first mechanical type designed to clean the erase head. In fact the FlexiBar head cleaner is capable of cleaning up to seven points of the cassette mechanism automatically. These include the play head, record head, erase head, single capstan and pinch roller and dual capstans and pinch rollers in auto reverse machines.

The head cleaner requires just 15-20 seconds of operation to complete the cleaning process. Replacement cleaning felts are readily available at reasonable prices.

The FlexiBar head cleaning cassette is available throughout Australia from selected record shops and hifi stores for \$9.95.


For further information contact Goldring Audio Industries, 89 Chandos St, St Leonards, 2065. Telephone 439 3100.

Stepper motor driver circuit

Motorola has announced immediate availability of a new stepper motor driver circuit — the MC3479P. The new driver is especially optimised for two phase stepper motors commonly used in disk drives and robotics. It allows either forward or reverse rotation to be selected. Additionally, it permits full step or half step rotation, depending on the logic input.


The MC3479P is supplied as a high thermal dissipation 16-pin DIL package, permitting sustained motor currents of up to 0.25A. Features include motor braking for high speed microstepping, TTL compatible inputs and a single supply voltage of between 7.2V and 16.5V.

Motorola Semi Conductor Products, 250 Pacific Highway, Crows Nest, 2065. Phone (02) 438 1955 or (03) 561 3555.



BROADBAND RF WATT METER

Model 44A

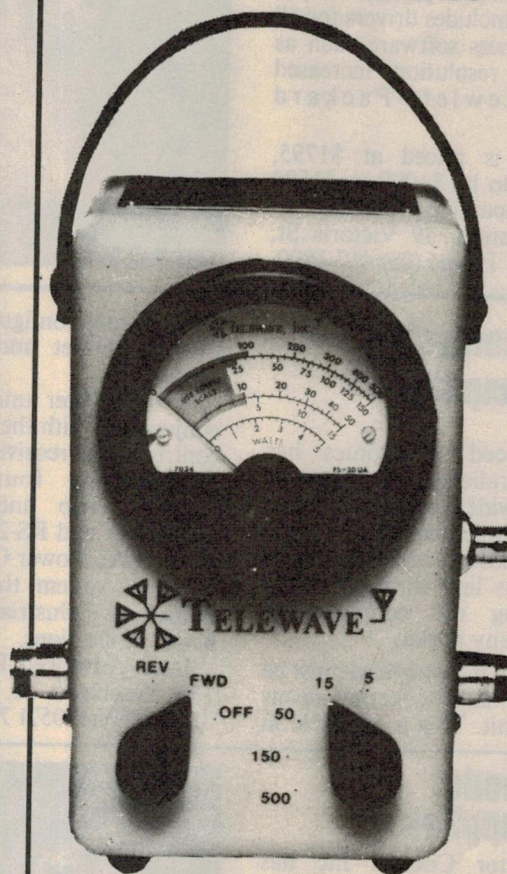

- Requires no inserts
- No bandswitching
- Measures 1 to 500 watts
- Five power ranges
- Five watts full scale
- Frequency range: 25 to 1000 MHz
- Measures incident and reflected power
- Shock mounted meter movement
- Available with type N or UHF interchangeable connectors
- Light weight: Easy to carry

The Model 44A RF Watt Meter is a compact, versatile instrument for measurement of radio frequency power which reads directly in incident and reflected power. A truly wide band and dynamic range instrument that does not require inserts or bandswitching.

It is ideal for mobile radio installation in aircraft or ground vehicles as well as base stations. The metal die-cast case is constructed to withstand rugged field use.



SCIENTIFIC DEVICES AUSTRALIA PTY. LTD.
VIC. 2 JACKS RD., SOUTH OAKLEIGH, 3167
PHONE: (03) 579 3622 TELEX: AA32742
N.S.W. 559A WILLOUGHBY ROAD,
WILLOUGHBY, 2068
PHONE: (02) 95 2064 TELEX: AA 22978
S.A. 31 HALSEY RD., ELIZABETH EAST, 5112
PHONE: (08) 255 6575 TELEX: AA 88125.


Computer plotter from Roland

Roland, a name well known for musical equipment, is likely to become equally well known for computer plotters. The company's recent release of the DXY880 has helped to take their share of this market to just over 40%.

The DXY880 is an A3, eight-pen plotter. It joins the DXY100 single-pen and DXY800 eight-pen plotters in the Roland line up. It includes drivers for all the common business software such as Lotus 1-2-3, high resolution, increased speed and Hewlett-Packard compatibility.

The DXY880 is priced at \$1795, which is claimed to be \$1000 to \$1500 below that of comparable products.

Roland Corporation, 39 Victoria St, Fitzroy, Vic 3065. Phone (03) 417 1800.

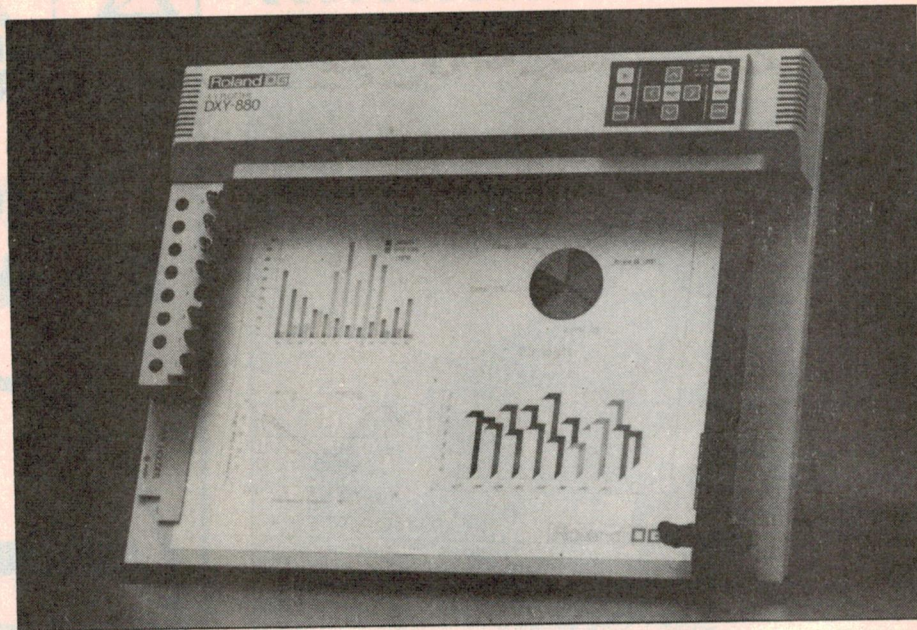

Appliance control by microcomputer

Lemic Advanced Electronics has released an Australian-designed system that enables a wide range of control applications for microcomputers. The system uses the existing mains wiring as a communications link throughout the house, permitting the computer to control virtually any outlet.

The appliance to be controlled must be connected to the mains socket by means of the receiver unit. This is available in

five different configurations, including a two-way outlet and a 300W 12-step control.

A transmitter unit must be used in conjunction with the computer to permit control of the receiver units. This unit is available in four configurations, including two and three-line serial, Centronics and RS-232.

The LAE Power Control is a practical low cost system that can be used in numerous industrial, commercial and home applications.

LAE Advanced Electronics Pty Ltd, 135 Roseneath St, Nth Geelong, Vic 3215. Phone (052) 78 4254.

Eurocard Connectors

Intended for PCB applications, TRW Eurocard Connectors offer high reliability and low cost. The connectors are easy to assemble, feature dual spring socket design, and meet performance criteria for the appropriate DIN, VG and MIL standards. They are available in straight or PC-mount termination styles.



Total Electronics, 9 Harker St, Burwood, Vic 3125. Phone (03) 288 4044.

Switch mode power supplies

Semiconductor Circuits Inc has added new models to its range of switching power supplies. The units are available in three output power ranges: 10 to 75W single; 100 and 150W single; and 12.5 to 50W multiple.

There are 28 new models in the 10 to 75W range, with voltages of five, 12, 15 and 24VDC. Output protection is in the form of foldback over-current limiting and overvoltage clamping.

There are also 16 new 100 and 150W units (five, 12, 15 and 24V) and 21 multiple output models. All 65 units are designed to comply with UL1012 and are suited for a wide variety of applications such as process control, computer peripherals and test equipment.

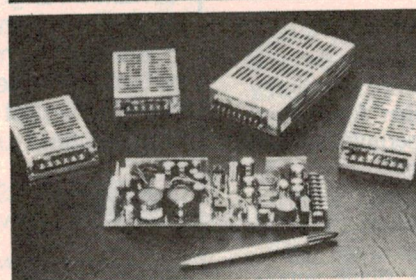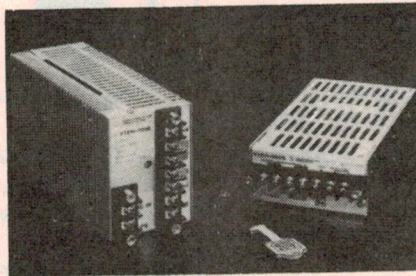

George Brown Electronics Group, 174 Parramatta Rd, Camperdown 2050.

Travelling wave amplifier

Logimetrics has introduced a new microprocessor-based travelling wave tube amplifier. It is intended for ATE test systems, laboratory use and component testing.

The new amplifier, Model A339/IJ, is a microprocessor based instrument and includes the latest technology in mini-TWT tubes. It offers a digital readout displaying helix voltage and current, collector voltage, RF power output in dB and watts, fault indication and operational mode.

The A339/IJ is intended for use in the frequency range 7GHz to 18GHz at 20W, with similar models available for frequencies from 1GHz to 18GHz in power ratings of 10 and 20W.

Elmeasco Instruments Pty Ltd, PO Box 30, Concord, NSW 2137. Phone (02)736 2888.

ELECTRONICS GALORE

100's OF OTHER
BARGAINS
FOR CALLERS

'OPEN SESAME' TO A 1001 STUPENDOUS BARGAINS

Scoop Purchase

Limited stocks


JVC Battery Charger/ Power Supply

Combined battery charger and fully regulated power supply unit (Model AA-P41EA)
Input: 240VAC 50Hz
Output: 12VDC 2.3A

Has built in over-charge prevention and automatic change over from nicad to power supply.

Ideal for use as a computer power supply

All brand new and cartoned with instruction book. Normally around \$150 but from us a silly



only \$60 plus P&P certified post \$8.00


Huge scoop purchase of Plessey plugs and sockets

Knockout prices on the 159 series of plugs and sockets from Plessey. The range uses very effective locking devices, excellent contact areas and gold flashing for low contact resistance. The cover allows top or side entry. An extra contact on one row allows for polarisation.

Working Voltage:
350V DC or AC (peak)

Current rating:
5A DC or AC (RMS) Max operating temperature 70 degrees C

Flashover voltage
4kV between contacts and to case
Sockets with mounting brackets and retainers



Number of ways	Cat Number socket	Dim (inch)	Plugs with cover Number of ways	Cat Number
11	32841	.99	11	324967
23	324847	1.88	23	324973
31	324851	2.47	31	324977

31 way plug with cover & panel socket

23 way plug with cover & panel socket

\$6 a pair

11 way plug with cover & panel socket

\$3 a pair

\$4.75 a pair



Microswitch Bargain

Top quality Cherry brand. 15A/250VAC rating. Normally open contact with lever.

only 65c
10 for \$5.50

150 ohm/25W Wire Wound Rheostat

Going at absolutely giveaway prices for New Year. Ceramic body. 1/4" shaft. Perfect for speaker attenuators, power supplies etc.

only \$1.00

Resettable Counter

Fantastic resettable 12V counter. 4 digits 50mA, 10cps. Thousands of uses.

only \$10

Give away specials
Limited stocks only

2764 8Kx8 EPROM was \$13.00 now \$8.00
6116-P3 150nS Static RAM was \$9.95 now \$6.50

Money Savers

A14A Glass Diodes 100V 1A 10 for \$1
A15A Glass Diodes 100A 3A 10 for \$1.50

IN 914 (IN4148) Diodes 100 for \$2.50
IN4004 Diodes 50 for \$2.50
BC548 Transistors 10 for \$1.40

BC549 Transistors 10 for 90c
BC559 Transistors 10 for 90c
BC547 Transistors 10 for 90c

BC557 Transistors 10 for 90c
BC332 Transistors 10 for 90c
BC109/BC337 Transistors 10 of each (20) \$3.00

TIP29B Transistors 10 for \$3.50
4001A CMOS 10 for \$1.50
4020A CMOS 10 for \$2.50

Crystal 6MHz \$2.50 each
Crystal 32.768 Clock Xtal \$1.25

Crystal 4433.619KHz Colorburst \$2.00

400m Roll Twisted Pair Bell Wire

Top quality single strand pairs. Perfect for burglar alarm systems, intercoms etc, etc. 400m rolls. Limited quantity to clear.

A Mile of Wire

Limited quantities. Single strand. Priced to clear. 1650 metre roll.

only \$30.00

300V/150A Stud Rectifiers below wholesale

Astounding savings on these 300V rectifiers. 300V forward or reverse voltage (please specify). All brand new current stock.

only \$7.50

fire proof

only \$25

Tuning Gang Bargain

We have limited stocks of these rare beasts! 10-150pf air spaced/ceramic insulated tuning capacitors from Jackson.

Normally selling for \$8.00 This month

only \$3.50

5 for \$32.50



SHERIDAN

ELECTRONICS PTY LTD

164-166 Redfern Street, Redfern, NSW 2016.
Phone (02) 699 5922, 699 6912

Mail Orders to: PO Box 229 Redfern NSW 2016

Mail Charges:

\$5.00-\$9.99 \$3.50
\$10.00-\$24.99 \$4.00
\$25.00-\$44.99 \$6.00
\$50.00-\$99.99 \$7.00
\$100 and over \$8.00
Large and overweight items sent Skyroad Freight Forward

Trading Hours:

Mon-Fri 9am-5:30pm
Thurs. 9am-7pm
Saturday 9-12pm
Note: We accept Bankcard and American Express. However we cannot provide quantity discounts

on credit card purchases or account orders. Minimum for account orders is \$50.00. Minimum order is \$10.00 exclusive of postage and packing.


All prices include sales tax.

TRANSFORMER SELECTION GUIDE

This selection guide covers transformers for connection to 240V, 50Hz mains with secondaries from 1.5 to 115V.

All are designed to Australian Standard 3126 or the relevant clause of that standard as applicable.

They are all manufactured in Australia. Prefixes indicate the method of construction — popular types being illustrated.

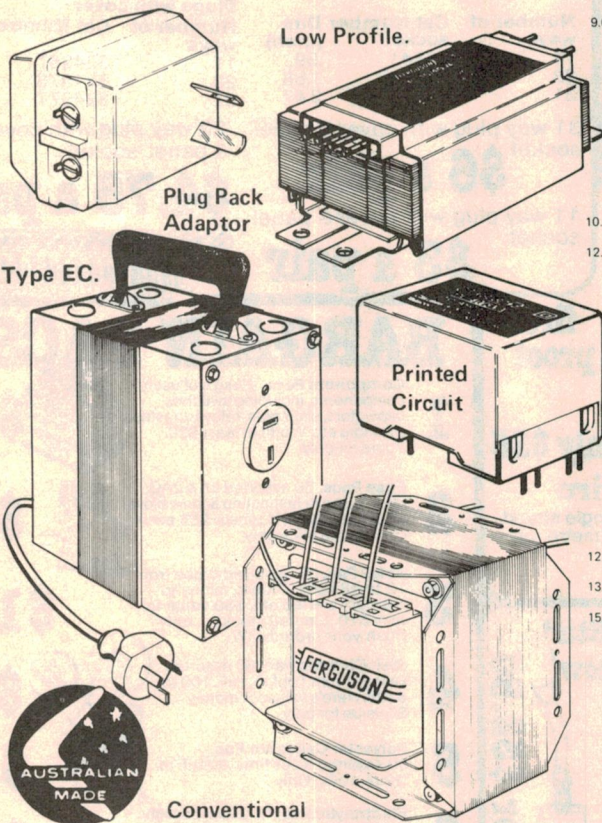

Many of the transformers have twin secondaries enabling different voltages/currents to be obtained from the same transformer. Many are also suitable for centre tapped configurations and these are denoted by an asterisk. The column headed VA relates to total VA of the transformer concerned and should not be exceeded.

If no suitable transformer is listed, we would be pleased to discuss your requirements and quote.

- Battery Chargers & Eliminators.
- Power Supplies.
- Constant Voltage Transformers.
- Motor Starters.
- Discharge Lighting Control Gear.
- Emergency Control Gear.

TOTAL					TOTAL					
VOLTS	AMPS	V.A.	TYPE NO.	CONSTRUCTION	VOLTS	AMPS	V.A.	TYPE NO.	CONSTRUCTION	
1.5	1.11	20.0	PL1.5-18/20VA	LP	4.0	120.0	PF3788*	C		
	2.22	20.0	PL1.5-18/20VA	LP	5.2	125.0	TS24/125B	E		
3.0	1.11	20.0	PL1.5-18/20VA*	LP	5.2	125.0	TS24/125VA	E		
	2.22	20.0	PL1.5-18/20VA	LP	8.33	200.0	TS24/200B	E		
	8.0	120.00	PF3788	C	8.33	200.0	TS24/200VA	C		
					12.5	300	TS24/300VA	C		
4.0	1.0	6.0	PPB4/1000	PA	12.5	300	TS24/300B	E		
					20.8	500	TS24/500VA	C		
4.5	1.11	5.0	PL9/5VA	PCB						
	1.11	20.0	PL1.5-18/20VA	LP	25.0	0.5	12.5	PF2565*	C	
	2.22	20.0	PL1.5-18/20VA	LP	26.0	10.0	350.0	PF3783	C	
6.0	0.4	2.5	PF2851	C						
	0.83	5.0	PL12/5VA	PCB	27.0	4.0	120.0	PF3788	C	
	1.11	20.0	PL1.5-18/20VA*	LP	28.0	4.0	112.0	PF3577	C	
	2.22	20.0	PL1.5-18/20VA	LP	10.0	350.0	PF3783	C		
	3.33	20.0	PL12/20VA	LP						
	4.0	120.0	PF3788*	C	30.0	0.08	2.5	PL30/2.5VA*	PCB	
	6.67	40.0	PL12/40VA	LP		0.17	5.0	PL30/5VA*	PCB	
	10.0	60.0	TS6/60EC	E		0.25	7.5	PL30/7.5VA*	PCB	
						0.4	12.0	PL30/12VA*	PCB	
7.5	0.67	5.0	PL15/5VA	PCB		0.67	20.0	PL30/20VA*	LP	
	1.11	20.0	PL1.5-18/20VA	LP		1.33	40.0	PL30/40VA*	LP	
	2.22	20.0	PL1.5-18/20VA	LP		2.0	60.0	PL30/60VA*	LP	
	2.67	20.0	PL15/20VA	LP		4.0	120.0	PF3788*	C	
	5.33	40.0	PL15/40VA	LP						
8.0	1.0	6.0	PPB8/1000	PA	31.0	5.0	200.0	PF4361/1	C	
					8.0	300.0	PF4362	C		
9.0	0.28	2.5	PL18/2.5VA	PCB	32.0	1.88	60.0	TS32/60EC	E	
	0.56	5.0	PL9/5VA*	PCB		3.9	125.0	TS32/125B	E	
	0.56	5.0	PL18/5VA	PCB		3.9	125.0	TS32/125VA	E	
	0.83	7.5	PL18/7.5VA	PCB		6.25	200	TS32/200B	E	
	1.11	20.0	PL1.5-18/20VA*	LP		6.25	200	TS32/200VA	C	
	1.33	12.0	PL18/12VA	PCB		9.4	300.0	TS32/300VA	C	
	2.22	20.0	PL1.5-18/20VA	LP		9.4	300.0	PF4244*	C	
	2.22	20.0	PL18/20VA	LP		9.4	300.0	TS32/300B	E	
	4.44	40.0	PL18/40VA	LP		15.6	500	TS32/500VA	C	
	6.67	60.0	PL18/60VA	LP		15.6	500.0	TS32/500EC	E	
	10.00	120.0	PF4405	C		31.55	1000.0	TS32/1000EC	E	
	20.00	210.0	PF4354	C						
10.5	1.11	20.0	PL1.5-18/20VA	LP	32.5	10.0	350.00	PF3783	C	
12.0	0.2	2.5	PF2851*	C	33.0	5.0	200.0	PF4361/1	C	
	0.21	2.5	PL24/2.5VA	PCB		8.0	300.0	PF4362	C	
	0.42	5.0	PL12/5VA*	PCB	35.0	5.0	200.0	PF4361/1	C	
	0.42	5.0	PL24/5VA	PCB		8.0	300.0	PF4362	C	
	0.5	6.0	PPB12/500	PA	10.0	350.0	PF3783	C		
	0.63	7.5	PL24/7.5VA	PCB	36.0	0.06	2.5	PF3787*	C	
	0.67	8	PPA12/670	PA		0.13	5.0	PL40/5VA*	PCB	
	1.00	12.0	PL24/12VA	PCB	40.0	0.5	20.0	PL40/20VA*	LP	
	1.11	20.0	PL1.5-18/20VA*	LP		1.0	40.0	PL40/40VA*	LP	
	1.25	15	PPC12/1250	PA		1.5	60.0	PL40/60VA*	LP	
	1.67	20.0	PL12/20VA*	LP		1.5	60.0	PF3993*	C	
	1.67	20.0	PL24/20VA	LP		5.0	350.0	PF3783	C	
	3.33	40.0	PL12/40VA*	LP	42.0	5.0	350.0	PF3783	C	
	3.33	40.0	PL24/40VA	LP		6.0	300.0	PF4363	C	
	5.0	60.0	PL12/60VA	LP						
	5.0	60.0	PL24/60VA	LP						
	5.0	60.0	TS12/60EC	E	44.0	6.0	300.0	PF4363	C	
	8.0	120.0	PF3788	C						
	10.42	125.0	TS12/125B	E	47.0	6.0	300.0	PF4363	C	
12.6	1.0	12.5	PF2565	C	52.0	5.0	350.0	PF3783*	C	
13.5	1.11	20.0	PL1.5-18/20VA	LP	56.0	2.0	112.0	PF3577*	C	
15.0	0.17	2.5	PL30/2.5VA	PCB		5.0	350.0	PF3783*	C	
	0.33	5.0	PL15/5VA*	PCB	58.5	5.0	350.0	PF3783	C	
	0.33	5.0	PL30/5VA	PCB						
	0.50	7.5	PL30/7.5VA	PCB	62.0	2.5	200.0	PF4361/1*	C	
	0.8	12.0	PL30/12VA	PCB		4.0	300.0	PF4362*	C	
	1.11	20.0	PL1.5-18/20VA*	LP						
	1.33	20.0	PL15/20VA*	LP	63.0	5.0	350.0	PF3783	C	
	1.33	20.0	PL30/20VA	LP						
	2.67	40.0	PL15/40VA	LP	65.0	5.0	350.0	PF3783*	C	
	2.67	40.0	PL30/40VA*	LP						
	4.0	60.0	PL15/60VA	LP	66.0	2.5	200.0	PF4361/1*	C	
	4.0	60.0	PL30/60VA	LP		4.0	300.0	PF4362*	C	
	8.0	120.0	PF3788	C						
16.0	18.0	300.0	PF4244	C	70.0	2.5	200.0	PF4361/1*	C	
16.5	1.11	20.0	PL1.5-18/20VA	LP		4.0	300.0	PF4362*	C	
18.0	0.12	2.5	PF3787	C		5.0	350.0	PF3783*	C	
	0.14	2.5	PL18/2.5VA*	PCB	84.0	3.0	300.0	PF4363*	C	
	0.28	5.0	PL18/5VA*	PCB						
	0.42	7.5	PL18/7.5VA*	PCB	88.0	3.0	300.0	PF4363*	C	
	0.45	8	PPA18/450	PA						
	0.67	12.0	PL18/12VA*	PCB	94.0	3.0	300.0	PF4363*	C	
	0.83	15	PPC18/830	PA						
	1.11	20.0	PL18/20VA*	LP	110.0	0.55	60.0	PL110/60VA	LP	
	1.11	20.0	PL1.5-18/20VA*	LP						
	2.22	40.0	PL18/40VA*	LP	115.0	0.43	50.0	TS115/50G	E	
	3.33	60.0	PL18/60VA*	LP		1.09	125.0	TS115/125B	E	
	4.0	120.0	PF3788	C		1.09	125.0	TS115/125VA	C	
	10.0	210.0	PF4354*	C		1.74	200.0	TS115/200VA	C	
20.0	0.25	5.0	PL40/5VA	PCB		1.74	200.0	TS115/200B	E	
	1.0	20.0	PL40/20VA	LP		2.61	300.0	TS115/300B	E	
	2.0	40.0	PL40/40VA	LP		2.61	300.0	TS115/300VA	C	
	3.0	60.0	PL40/60VA	LP		4.35	500.0	TS115/500EC	E	
	3.0	60.0	PF3993	C		8.7	1000.0	TS115/1000EC	E	
	2.5	60.0	TS24/60EC	E		17.4	2000.0	TS115/2000EC	E	
24.0	0.10	2.5	PL24/2.5VA*	PCB						
	0.21	5.0	PL24/5VA*	PCB						
	0.31	7.5	PL24/7.5VA*	PCB						
	0.5	12.0	PL24/12VA*	PCB						
	0.83	20.0	PL24/20VA*	LP						
	1.67	40.0	PL24/40VA*	LP						
	2.5	60.0	PL24/60VA*	LP						
	2.5	60.0	TS24/60EC	E						

* Centre Tapped Secondary

LP Low Profile

C Conventional

E Enclosed

PCB Printed Circuit Board Mounting

PA Plug Adaptor

* Centre Tapped Secondary

LP Low Profile
C Conventional
E Enclosed
PCB Printed Circuit Board Mounting
PA Plug Adaptor



FERGUSON TRANSFORMERS PTY LTD

331 High Street, Chatswood N.S.W. 2067. Tel: (02) 407 0261. Telex: AA25728

Branch Office: 7 Aristoc Rd., Glen Waverley Vic. 3150

Tel: (03) 561 6699 Telex: AA 33510

Bubble memory module from Fujitsu

IRH Components are now distributors for Fujitsu bubble memory modules. The modules, in addition to the memory devices, have peripheral linear ICs. With the addition of control ICs the modules can be used for reliable, maintenance-free file memory.

All components operate at TTL I/O level, with up to 4MB of memory directly addressable. Access time for stored data is 12.5ms, permitting a data transfer rate of 100K bits/s. The modules are supplied in 40-pin DIP configuration.

IRH Components, 53 Garema Circuit, Kingsgrove, NSW 2208. Phone 750 6444.

New family of compact RAMs

Texas Instruments has released a new family of low cost, high density dynamic RAM modules. The new TM4164EC4 (64K x 4) modules are single in-line packages, providing up to 3.5 times as much memory in the same board space as conventional dual-in-line packages.

Other ICs in the new family include the TM4164FL8 (64K x 8) and TM4164FL9 (64K x 9). Each device is available with either 120, 150 or 200 nanosecond maximum access time. One-off prices range from \$56 to \$97.


Texas Instruments Aust Ltd, 6 Talavera Rd, North Ryde 2113. Phone (02) 887 1122.

Adjustable A/D converter

The Teledyne Semiconductor TSC5000 A/D converter allows engineers to instantly select a desired combination of accuracy and speed. Designed to work in tandem with a microprocessor, the IC is a dual slope integrating converter that can operate anywhere from 14-bit resolution at 5Hz to 8 bits at 400Hz. Maximum resolution is 4½ digits.

Fabricated in CMOS, the TSC5000 includes an input buffer and an integrator with controllable parameters. Supply is $\pm 5V$ and inputs within the range $\pm 4V$ are acceptable.

Promark, PO Box 115, Nunawading, Vic 3131. Phone (03) 878 1255.

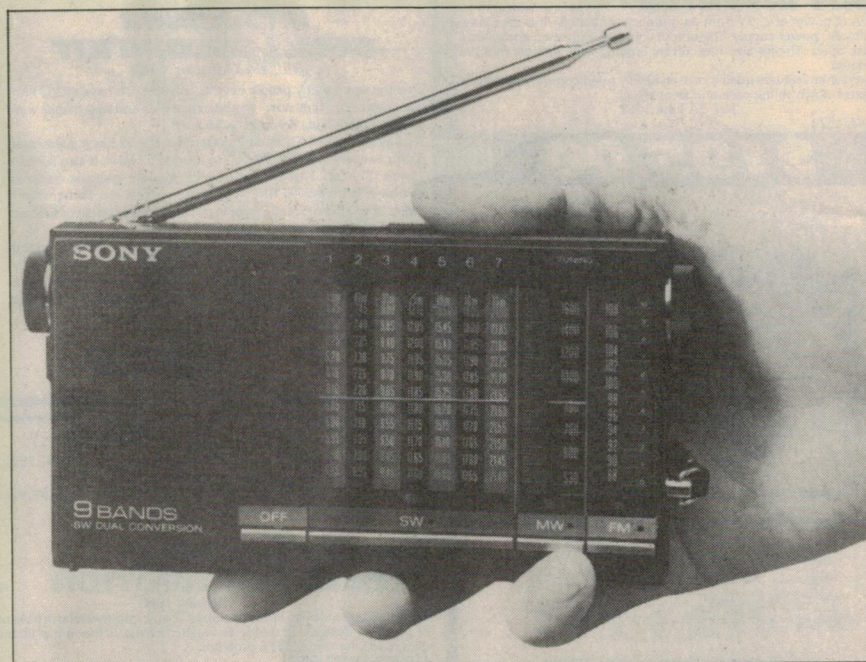

Pocket-size shortwave receiver


Single chip design has enabled Sony to develop a nine-band receiver measuring only 134 x 74 x 23mm. Weighing in at only 235g, including batteries, the receiver is virtually pocket-size.

A separate crystal is used for each of the seven shortwave bands. These

cover the range 5.85 to 21.9MHz — separate bands are provided for normal MW and FM broadcasts. The Sony receiver also features touch tuning.

Sony (Aust) Pty Ltd, 33 Talavera Rd, North Ryde 2113. Phone (02) 887 6666.

Surface-mounted IC timer

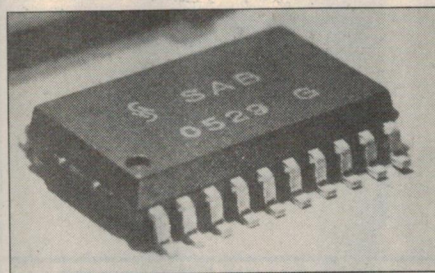

The locally stocked SAB 0529 IC timer from Siemens is now also available in the compact SO package. Designed for delay times ranging from one second to 31.5 hours, the device derives its timing from the mains.

The new SAB 0529G is only 2.65mm high — an important consideration when space is at a premium. It can operate on 4.5-5.5V DC at (typically) 1.4mA current consumption. Triacs or relays can be connected to the output and the user has the choice of eight overlapping time periods and two

function modes (on-time and turn-off delay).

Potential applications include industrial controllers and all equipment required to operate for a limited period of time: cookers, stoves, coffee machines, hand driers, stairwell switches, alarm systems, battery chargers, etc.

Siemens Ltd, 544 Church St, Richmond, Vic 3121. Telephone 429 7111.

Low-voltage tuner modules

Ellistronics now has available two low voltage tuner modules. The TDA7211 is an FM tuner featuring low oscillator radiation, 30dB conversion gain and good signal to noise ratio.

The TDA7220 is an AM/FM radio module, offering AM reception up to 30MHz and a low external component count. Both modules will operate reliably down to 1.4V.

Ellistronics Pty Ltd, 797 Springvale Rd, Mulgrave 3170. Phone (03) 561 5844.


GREAT KITS FOR '85

12/230V - 300 WATT INVERTER

This unit provides up to 300VA of power at 235V from an ordinary car battery. It is ideal as a standby AC power supply. The output voltage is regulated and gives a precise 50Hz. The kit also has current limiting with ultimate thermal shutdown. The Jaycar kit features quality conservatively rated components and is complete down to the case and front panel. Ref: EA June 1982

Cat. KA-1574

\$195.00

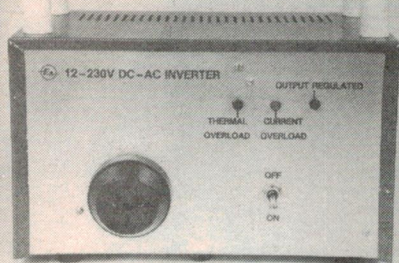

RAILMASTER KIT

Ref: EA September 1984

This is the most up-to-date train controller kit that we have seen. It offers all of the most wanted features including inertia, full overload protection etc. The kit includes front panel, correct console box and all parts. Cat. KA-1560

ONLY \$79.95
DIESEL SOUND SIMULATOR

Ref: EA November 1984

You'll be amazed how authentic this kit sounds. The kit includes PCB and all parts as well as all of the components for the lighting circuit. Cat. KA-1561

INCLUDES LIGHTING CIRCUIT
ONLY \$19.95
STEAM SOUND SIMULATOR

Ref: EA December 1984

This kit will make your model steam train sound like the real thing! Includes infra red optical switch to synchronise the "chuffs" to the wheel rotation. Includes all parts plus 32 ohm headphone type transducer. Cat. KA-1562

ONLY \$15.95

MOTORCYCLE INTERCOM

Ref: EA February 1984

What a great kit! This full duplex unit enables you to talk to your pinion passenger whilst driving with your helmets on! Powered by the bikes battery - you can both talk at the same time if you wish as there are no switches to activate. The Jaycar kit includes the special headphone inserts and all parts. Cat. KA-1533

ONLY \$39.95



UTILITY AMPLIFIER - 20 WATT

Ref: EA November 1984

A great low-cost, easy to build amplifier that gives Hi Fi performance. All components mount on the PCB which is supplied. Frequency response is from 45Hz to 68kHz and this unit can be used with speakers from 4 ohms up, on voltages from 20 to 35. A great kit for the person who requires low cost Hi Fi. Cat. KA-1567

ONLY \$17.50

5 (6.5)MHz OSCILLOSCOPE KIT

Ref: EA October 1984

Over the years many people have asked, "Do you have a CRO kit?" Our answer - up until now - has been that built and tested units were no dearer than kits, if you get a kit at all.


The Jaycar KJ-7050 Cathode Ray Oscilloscope kit has a guaranteed 5MHz bandwidth but should go to around 6.5MHz. It also features 75mm (3") CRT Blue Phosphor with accurate graticule, separate vertical and horizontal BNC type input sockets etc. Remember, a 5MHz 'scope is usually adequate to troubleshoot most microprocessor and other digital circuitry as well!

This is a wonderful opportunity to learn electronics AND end up with a valuable piece of test equipment as well.

The Jaycar KJ-7050 kit is absolutely complete. The chassis is pre-punched and every component including nuts and bolts are provided, along with instructions.

Cat. KJ-7050

ONLY \$249

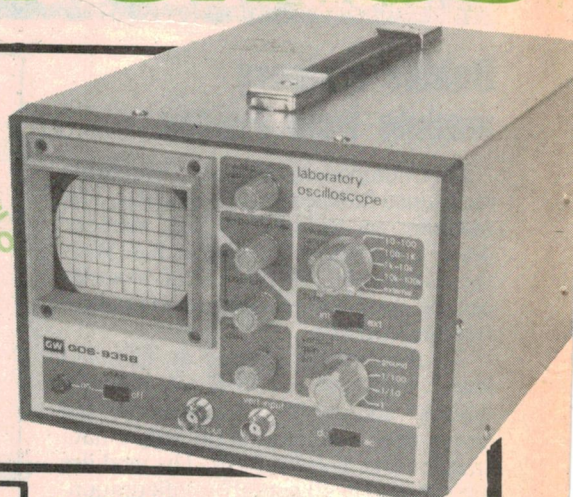

☆ OPENING SOON! ☆

Call in to our brand new store at 188 Pacific Highway GORE HILL. You can't miss it, just a few doors up from Dick Smith. We hope that all JAYCAR patrons on the North Shore will look us up. You're more than welcome!

ETI 342 CDI Type ELECTRONIC IGNITION

Ref: ETI February 1985

This brand new design virtually eliminates the controversial problems of past CDI designs. Probably its biggest feature is that it has all but eliminated the CROSSFIRE problem.


OTHER FEATURES:

- High reliability
- Runs from 2-25V supply
- Doesn't create high coil current
- Hall-Effect Trigger compatible
- Die cast box
- Will work on virtually any type of ignition (i.e. boats, planes etc)

A REAL WINNER!!

Cat. KE-4690

\$55.00




ELECTRIC MOTOR SPEED CONTROLLER

new improved circuit

Ref: EA December 1984

Control a series wound or "universal" brush type motor with this superb kit. Now you can control the speed of your electric drill, lawn edger or domestic appliances etc. The Jaycar kit is supplied complete. Cat. KA-1558

VALUE AT \$24.95



AUSTRALIAN STANDARD STEREO AM DECODER

Ref: EA October 1984

This kit uses the Australian standard Motorola CQUAM decoder chip - why pay more for kits that include non-standard emphasis! This kit will decode the new AM stereo transmissions (with suitable AM tuner). Cat. KA-1555

ONLY \$19.95 COMPLETE

(Whistle filter coil extra - Cat. EE-3814 \$19.95)

MAIL ORDER HOTLINE

To save you time (and therefore money) we have installed a special HOTLINE direct to the inner workings of our Mail Order dept. This saves you from going through our Head Office switchboard! If you wish to place an order, enquire about an order or simply check for more information, call:

(02) 646 1300

8 SECTOR BURGLAR ALARM


Ref: EA Jan/Feb 1985

Why buy a commercially made up unit for more when you can buy this kit and SAVE money! A unique feature of this kit is the fact that you can wire N/O and N/C alarm sensors ON THE SAME LINE.

☆ **8 sectors** ☆ **2 delayed entry sectors** ☆ **Steel box** ☆ **Includes battery and siren driver in the price** ☆ **Variable exit and entry delays.**

BRAND NEW KIT FROM JAYCAR

Cat. KA-1580



\$139.00



BUSKER AMPLIFIER

Ref: EA February 1985

Fantastic, portable amplifier kit for low-level P.A., Buskers or for practice.

☆ **Battery or mains operation** ☆ **Full control - bass, treble and volume** ☆ **2 inputs (low and high)** ☆ **17 WATTS RMS output** ☆ **Gel battery automatically recharged when mains used.**

☆ **INTRODUCTORY PRICE** ☆

All electronics including GEL battery, 8" speaker, metal chassis etc. Cat. KA-1592

ONLY \$125


PRE-CUT WOODEN CABINET to suite Cat. KA-1593

ONLY \$30.00
BUY BOTH AND PAY ONLY
\$149.00
A FURTHER SAVING

- as you would expect from JAYCAR

\$399

DUE IN STOCK EARLY APRIL

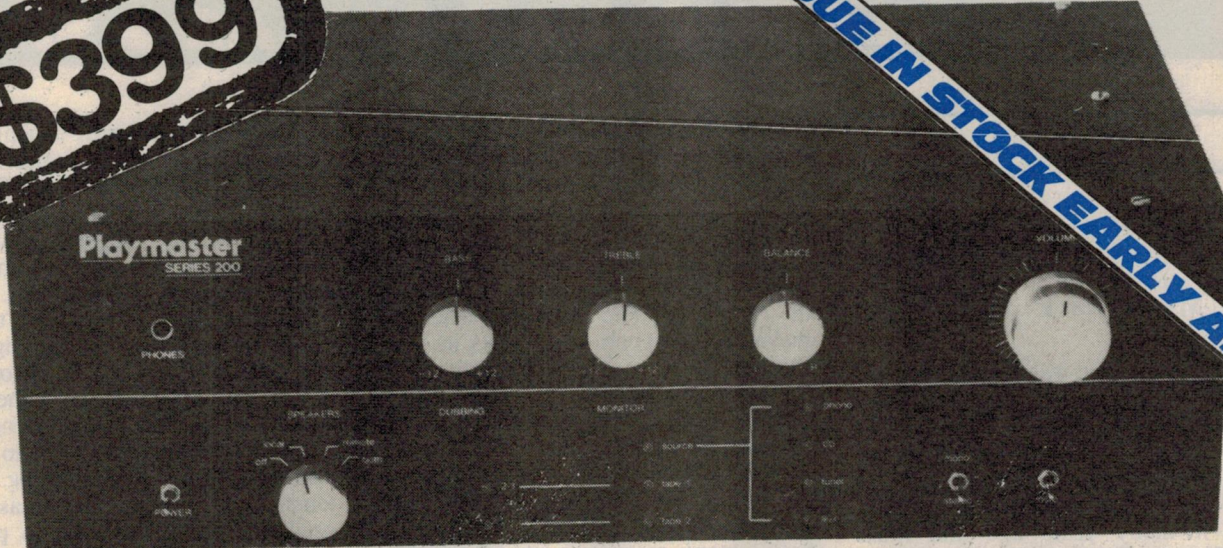

PLAYMASTER SERIES II MOSFET STEREO AMP

Ref: EA Jan/Feb/March 1985

"... a stereo amplifier that will equal or better just about any integrated commercial amplifier, regardless of price".

- Leo Simpson, Editor of EA, Feb. '85.

MAIN FEATURES OF THE NEW PLAYMASTER

- Switchable phono inputs for MM and MC cartridges
- Electronic signal switching
- Full facilities for dubbing between two cassette decks
- Monitor loop for either of two cassette decks or a signal processor
- Click action pushbutton switches for selection of sources, dubbing and tape monitor with LED status indicators
- Centre detents on bass, treble and balance controls, multiple detents on volume control
- Heavy duty heatsinks
- Power transformer for low hum and noise
- Easy to build construction - all parts except power supply mount directly on the two printed circuit boards; wiring has been kept to an absolute minimum
- 100 watts RMS per channel into 8 ohm loads
- Less than .01% total harmonic distortion.

Jaycar has spent considerable time with EA in development of the project. Central to the design are several key components not used in local amplifier designs before. Jaycar has sourced all of these components (samples from Jaycar were used in the prototypes). Other selected kit suppliers will have these components as well. BEWARE of kits that may be available that may not comply to the original design. Some aspects of the design are very critical & it is important that the project is assembled as per the original design.

Needless to say the Jaycar kit for the project is 100.00% ORIGINAL.

Finally, we are now in a position to advise that the cost of this kit amplifier down to the last nut & bolt is \$399. That's right! A pittance compared to the performance & facilities that you get.

EXCLUSIVE! JAYCAR AMP REPAIR GUARANTEE

We cannot imagine an amplifier of this magnitude being easier to make. Provided you can insert components into the PCB the right way around & not solder dry joints you should have no problems!

If however, you do have hassles getting the amp going, no problems!

Jaycar will provide a fixed price repair facility for this amp. This means, no matter what happens, you will get a great working amp. at a great price!

The price? \$39.95 which includes service, all main board parts (up to \$30 value), (Transformer & filter caps extra). It is highly unlikely that any damage over \$50 would ever occur.

See the kit instructions with the amp. for further details.

IN-CIRCUIT TRANSISTOR CHECKER


Ref: EA December 1983

Don't desolder that transistor! Check it in circuit. This kit will save you a lot of time and hassles and will even check diodes and SCR's too! The Jaycar kit includes all components PLUS Jiffy box and Scotchcal panel with full truth table for device checking.

Cat. KA-1119

PEACE OF MIND FOR

\$15.00



30 VOLT - 1 AMP BENCHTOP POWER SUPPLY

A brand new design that features a modern moulded plastic bench top type case.

☆ **Short circuit protection** ☆ **3-30V variable output** ☆ **0-1 amp with variable current limit** ☆ **load switching** ☆ **less than 2mV RMS ripple.**

Cat. KA-1574

VALUE \$64.50

Jaycar
ELECTRONICS

Incorporating ELECTRONIC AGENCIES
NUMBER 1 FOR KITS

N.S.W. SHOWROOMS

SYDNEY: 117 York Street Tel: (02) 267 1614

CARLINGFORD: Cnr. Carlingford & Pennant Hills Road. Tel: (02) 872 4444

CONCORD: 115/117 Parramatta Road. Tel: (02) 745 3077

HURSTVILLE: 121 Forest Road. Tel: (02) 570 7000

GORE HILL: 188/192 Pacific Highway (Cnr Bellevue Avenue) Tel: (02) 439 4799

QUEENSLAND BURANDA: 144 Logan Road Tel: (07) 393 0777

MAIL ORDERS: P.O. Box 480, AUBURN 2144. Tel: (02) 643 2000

HEAD OFFICE: 7/9 Rawson Street, AUBURN 2144.

Tel: (02) 643 2000 Telex: 72293

SHOP HOURS

Carlingford, Hurstville & Gore Hill

Mon-Fri: 9am - 5:30pm; Thurs 8:30pm; Sat 12pm

Sydney

Mon-Fri: 8:30am - 5:30pm; Thurs 8:30pm; Sat 4pm

Concord

Mon-Fri: 9am - 5:30pm; Sat 4pm

POST & PACKING

\$5 - \$9.99 \$1.50

\$10 - \$24.99 \$3.20

\$25 - \$49.99 \$4.50

\$50 - \$99.99 \$6.50

\$100 - \$199 \$8.00

Over \$199 \$10.00

COMET ROAD FREIGHT ANYWHERE IN AUSTRALIA ONLY \$12



**MAIL ORDER VIA
YOUR PHONE**

WEILL

Rise the Fall of the City. Mahogonny Lotte Lenya, Heinz Saverbaum, Gisela Litz and others with the Chorus and Orchestra of the North German Radio. CBS Masterwork Mono Disc CBS77431.

The performance was first issued over 20 years ago, in mono, of course. Now electronically reprocessed it is still in mono but much of the sound has been tidied up and is quite presentable today. I found it just as moving as when I first heard it many years ago and more recently a performance in the Sydney Opera House.

The recording has benefit of the great Lotte Lenya, the widow of the composer, in the leading role. She is no less than magnificent, and impressive too is Gisela Litz as Widow Begbick. The rest of the cast is excellent and the playing fine. If you don't already have it, don't miss it this time. (J.R.).



THE RING

Der Ring des Nibelungen. Excerpts by Sir Georg Solti and the Vienna Philharmonic Orchestra. Decca Digital Disc SXDL7612.

Solti conducts this music with all his usual flair — and sometimes flare. My reservation about the set up is that many of the excerpts are torn bleeding from their context. This is all the more noticeable because they are all taken from the Ring of the Nibelung, a series of musical dramas which runs with magical seamlessness through the four nights it takes to perform.

Some of the items end on the leading note leaving the music up in the air. A full close, however anomalous, would be better than this. Another fault is the substitution of the vocal line to an orchestral instrument. The most inept of these is Wotan's Farewell to Brunnhilda in Act 3 of The Valkyrie where a melancholy French horn busks its way through the score. The result is dismal in the extreme and has a depressing effect on the rich orchestral sound in the background music.

This opinion voiced I have nothing but praise for the rest of the disc. Polygram recently issued a brochure of Solti's many recordings up till roughly the end of 1984. I did a "Freddy Blanks" and adding them up arrived at a total of 32 covering an enormous range of composers of many nationalities from the 18th to the 20th centuries. I chose four, selected with an eye to show the width of Solti's score from time to time.

The sound throughout the disc has a well controlled dynamic range. The recital starts with the Ride of the Valkyries without voices and has the surprising effect of stopping in the middle of a phrase. Next comes The Entry Of The Gods Into Walhalla — the Entrance Theme seems a little slow. Perhaps out of its context Solti takes it thus to emphasise a point.

But here it is too slow to sound at all triumphant and reminded me vividly of a Bayreuth performance where at this point a beautifully contrived curtain fall left one with a final image, not of stately gods, but a lean Loge mocking them as they entered.


Then comes the Wotan's Farewell excerpt with the voice played by the horn — utterly unacceptable nowadays. Only when the horn solo stops does the magic of the Sleep Music take over. The great crescendo comes off excitingly, and later in the Fire Music a flickering piccolo rides sparkling on the top of the orchestra.

And there is the stupendous first utterance of the Siegfried theme, much too noble for such an oaf — Wagner's misinterpretation of his friend Nietzsche's Superman idea. The hapless horn solo competely distorts Wagner's intention in this fine coda to the second section of the four part work. The ending is disturbingly abrupt.

On the reverse one has a beautifully done Forest Murmurs from Siegfried in

which the wonderful Vienna Philharmonic strings play a peerless part. This has a real ending. Siegfried's Funeral March is also nobly performed despite some slightly portentous hesitations unnoticeable in Solti's complete recording of the Ring. It strides majestically across death with trumpets.

The final item — you might have noticed that they are in chronological order of composition — is the Closing Scene from Gotterdammerung which starts where Brunnhilda's solo ends. It also has an inconclusive ending. I think a tendency to over-interpret occasionally is used by Solti to underline a point not necessary in a complete recording, four sets of which are still available by Solti, and are still warmly recommended.

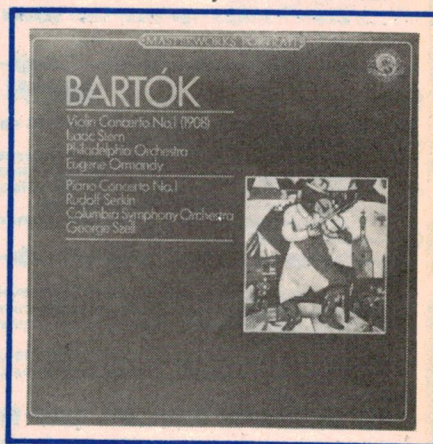

BARTOK

Violin Concerto No. 1 (1908). Isaac Stern (violin) with the Philadelphia Orchestra under Eugene Ormandy.

Piano Concerto No. 1 (1926). Rudolf Serkin (piano) with the Columbia Symphony Orchestra under George Szell. CBS Masterwork Series Analog Disc MP39057.

These concertos come from different ends of Bartok's creative career. The violin concerto is an early work which despite some formal uncertainties shows limitless promise. It was written for and dedicated to a young violinist, Stfi Geyer, with whom Bartok was deeply in love. It made a brief premiere in Hungary but was afterwards shelved and forgotten. Just why still remains a mystery. It was obviously the most important work the composer had as yet produced yet it didn't receive public performance until five years after his

TAPES

INTEREST

death. It has therefore been numbered as a posthumous opus.

Readers are warned that though it has strong romantic links they are not to expect a Tchaikovsky-Rachmaninov type of work. Early though it is, it is still a difficult nut to crack for newcomers to Bartok. Things are made easier by Stern's sweet tone and effortless accuracy and authority.

The fine stranded first movement is slow and yearning with a beautiful lyrical change towards the end. Then comes a fast and final movement — its dance-like violin solo needing all Stern's nimbleness to enunciate every note as clearly as he does. It slows down to a beguiling barcarolle-like sequence. The happy ending breathes fulfilment. Though the analog sound is generally good the orchestra under Ormandy sometimes fades a little in favour of the soloist, who uses it very much to his advantage.

The piano concerto is a mature work written when the composer was 45 years old. It is an angry, bitter work in which the piano gnashes its percussive dissonant chords at you. These are used rhythmically rather than harmonically and could easily frighten a newcomer away.

I know it fairly well but have never got around to liking it very much though it contains a lot that earns my deepest respect. It was not welcomed at its New York premiere and has never since won popularity with pianists. Serkin plays it very well here. Sound is uneven with here and there a tendency to reverberate.

BRAVURA

Violin Recital by Cho-Liang Lin of short pieces by Sarasate, Falla (Suite Populaire Espagnole), Rachmaninov, Mozart, Schumann, Kreisler and Wieniawsky. Accompanist, Sandra Rivers. CBS Digital Disc IM 39233.

Cho-Liang Lin is undoubtedly a fine fiddle player. He has a brilliant technique, dead centre intonation, a sweet tone and an assured manner. The questions of repertoire and taste are another matter.

In this, the first recital by him that I have heard, is choice of items tends towards that of a restaurant violinist who goes from table to table "beguiling" embarrassed diners whom he expects to

receive his attentions rapturously. On the rare occasions it has happened to me I have asked him politely to go away.

Overriding everything is Soulful Expression. Every phrase is lovingly caressed and over-interpreted. This becomes all the more difficult to understand when you learn that the recording is dedicated to his former teacher, the late Rober Pikler. I knew Pikler well and respected him as a first-class musician with classical taste. I doubt if Cho-Liang learned his present style from him. He seeks, at any rate in this recital, the very cheapest form of popular approval.

In this aim he is partnered by an excellently equipped but flashy styled accompanist Sandra Rivers who, however, sticks to him as closely as a stamp to an envelope. Even turn of the century virtuoso violinists had the grace to include some tribute to the classics, even a baroque sonata by some bore like Tartini or Corelli. Nothing of that kind is included in Cho-Liang's recital.

True it is labelled Bravura, so you are warned about what to expect. Most of his items might be used as encores today. Otherwise the days of such self-indulgence are over, thank heavens. The well-worn survivors of yesteryear nowadays only appeal to the lowest common denominator of musical taste. The sound is patchy, occasionally so reverberant that there is a haze on the edge of it. Some pieces, on the other hand, come off perfectly.

If you like all this sort of thing here is what might probably be one of the best examples you're likely to meet for some time. If you're like me you'll just get impatient. It is a good example of almost intolerable brilliance.

BACH MOTETS

Motetten: J. S. Bach. Singet dem Herrn ein neues Lied, BWV225. Jesu, mein Freude, BWV227. Windsbach Boys Choir, directed by Karl-Friedrich Beringer. Compact disc, Bellaphon 690.01.005. [From PC Stereo Pty Ltd, PO Box 242, Mt Gravatt 4122. Phone (07) 343 1612].

Essentially a polyphonic, choral form of liturgical music, the motet, from the French "mot" (word or saying) dates back to Limoges around the year 1000 — followed by centuries of gradual development, especially in the Notre Dame School. For a while, the motet

KALEX

UV MATERIALS

- Riston™ PCB
- 3M Scotchcal
- 3M INT

UV PROCESSING EQUIPMENT

KALEX LIGHT BOX

- Autoreset Timer
- 2 Level Exposure
- Timing Light
- Instant Light Up
- Safety Micro Switch
- Exposure to 22in x 11in

\$435.00 + ST
DELIVERED

KALEX "PORTU-VEE"

- UV Light Box
- Fully Portable
- Exposure to 10in x 6in

\$175.00 + ST
DELIVERED

KALEX ETCH TANK

- Two Compartment
- Heater
- Recirculation (by Magnetic Pump)
- Two Level Rack
- Lid

\$595.00 + ST
DELIVERED

RISTON 3000 PCB MATERIAL

SIZE INCHES	SINGLE SIDED	DOUBLE SIDED
36 x 24	49.50	62.70
24 x 18	24.75	33.00
18 x 12	13.75	17.60
12 x 12	8.80	11.80
12 x 6	6.00	6.45



plus sales tax if applicable.

KALEX

101 Burgundy St,
Heidelberg 3084
(03) 458 2976
Telex AA 37678
MELTON
(03) 743 1011

ELECTRONIC COMPONENTS & ACCESSORIES
• SPECIALIST SCHOOL SUPPLIERS

RECORDS AND TAPES

gravitated into a distinctly secular role, with instruments replacing some vocal parts, only to revert to its original religious/liturgical character in the mid 16th century.


In Bach's lifetime, the Motet had come to be associated mainly with funerals and memorial services and this was certainly the case with "Jesu, meine Freude" (BWV 227). But, curiously, the atmosphere of BWV 225 is far more suggestive of a celebration or an occasion of thanksgiving.

Both are presented here by the Windsbach Boys Choir, founded in 1946 and so called because it originated in a small German town by that name. Thanks largely to its founder, the late Hans Thamm, the Windsbach choir soon built up an enviable reputation, leading to concert engagements, radio broadcasts, recordings and international tours.

Directed now by Hans Thamm's successor Karl-Friedrich Beringer — an experienced musician in his own right — the choir sings without instrumental accompaniment (a capella) in accordance with the original intention of the composer.

Professional as it may be, however, the presentation is likely to have a somewhat sectional appeal — mainly to students and to those with a personal interest in music of this kind.

In terms of quality, the digitally sourced recording is technically good, except for a somewhat "papery" edge to the massed high soprano voices — a variant of the effect that I complained about in the February issue: ("Why the distortion on orchestral strings?"). Maybe it's an acoustic/aural effect, and it will pass unnoticed by listeners interested primarily in the music, but hifi fans may have reservations about it. (W.N.W.)

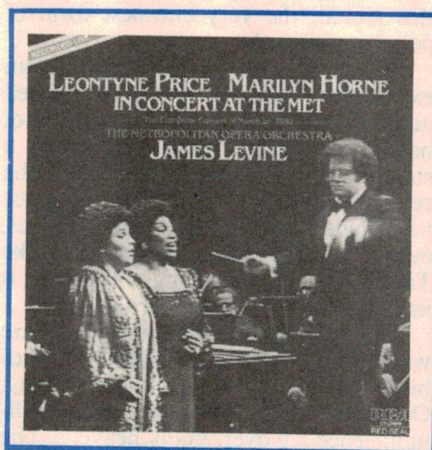

CONCERT AT THE "MET"

Leontyne Price, Marilyn Horne in Concert at the Met. With the Metropolitan Opera Orchestra conducted by James Levine. Digitally mastered stereo LP, double album, RCA CRL-24609.

It may never have been your good fortune to attend a concert at the famous New York Metropolitan Opera House but this recording should come as close as any to conveying the atmosphere of a major occasion in that venue.

This particular "all American" performance took place on the afternoon of March 28, 1982, as a full public concert, but one which was also videotaped for subsequent simulcast presentation over the US Public Broadcasting Service.

As indicated in the title, it features Leontyne Price, lyric soprano, and Marilyn Horne, who has a somewhat deeper voice variously described as "coloratura mezzo soprano" or "mezzo to contralto".

In the course of the program, Leontyne Price presents arias from "le

Nozze de Figaro" (Mozart) and "La Forza del Destino" (Verdi). Arias by Marilyn Horne are from "Rodelinda" (Handel) and "L'Assedio di Corinto" (Rossini). The two artists also combine magnificently in duets from "Cosi van Tutte" (Mozart), "Rinaldo" (Handel), "Aida" (Verdi) and "Norma" (Bellini).

There are two orchestral interludes: the overture to Verdi's "I Vespri Siciliani" and Sinfonia from Bellini's "Norma". They provide a good opportunity to assess the technical quality of the recording, which stands up very well to such scrutiny. Indeed, RCA's account of the digital technology used for the recording would be entirely in character on a Telarc jacket!

At the end of the official program, by way of encore, Marilyn Horne and Leontyne Price sing arias, respectively from Meyerbeer's "Les Huguenots", and Puccini's "La Rondine" — the latter notable for a high-C cadence in which the voice is so pure and true that it takes on an almost "electronic" quality. The program concludes with the Flower Duet from Puccini's "Madame Butterfly" and thunderous applause from the audience.

A word about the applause: While the recording is of a "live" performance, it has been suitably edited to retain the atmosphere, without subjecting the listener to tedious, and often noisy delays between items.

If you like opera, you should find much in this record to interest and enjoy. Even if you're only half-hearted about the music, the sense of occasion is quite compelling. Well worth a hearing. (W.N.W.)

POPULAR VOCAL

TIM CONNOR


Tim Connor: One More Road. Stereo LP. Powderworks POW-4035 (cassette POWC-4035). Distributed by RCA.

Readers in Western Australia will probably remember Tim Connor as a young Irishman, a friend of Dave Allen, who began his career in Australia hosting his own show on Channel 9 in Perth. Personally, I remember him as a typical and pleasantly listenable young Irish singer-entertainer.

Since then, his native Irish background has taken quite a beating from ocker acquaintances like Paul Hogan (who contributes warmly to the jacket notes). So the Tim Connor you

PULSAR

Little Big Board
Now reduced from \$750
to \$450

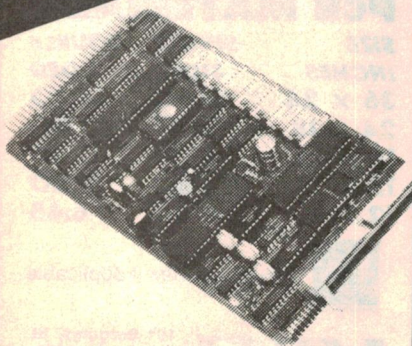

thousands sold

PULSAR ELECTRONICS PTY. LTD.
19 Catalina Drive, Tullamarine. 3043
Phone 330 2555.

HIGH QUALITY AT A SENSIBLE PRICE



ELNA
LB Series

SOANAR COMPUTER GRADE ELECTROLYTICS

LB Series capacitors are particularly suitable as power source filters for computers, inverters, high current power supplies, high output power amplifiers and control equipment.

Despite their small size, these capacitors have exceptionally large capacity and are capable of handling high ripple currents. Miniaturisation has been achieved by the use of new electrode foils developed from a technique of high magnification etching.

Construction includes an aluminium can which is sealed with a long life, heat resistant resin and heavy duty screw terminals for handling the high currents involved. Mounting clamps are supplied as standard equipment.

**10,000µF TO 100,000µF
16 Volt TO 35 Volt DCW**

Available ex stock all States

JN

SOANAR ELECTRONICS PTY. LTD.

INCORPORATED IN VICTORIA
30-32 Lexton Road, Box Hill,
Vic., 3128, Australia. Telex: 34303.

VIC.: 895 0222
S.A.: 297 0811
W.A.: 381 9522

N.S.W.: 789 6744
QLD.: 852 1133
TAS.: 31 6533

SCAN AUSTRALIA

WITH WORLD'S BEST SCANNING RECEIVERS



AR2001

FOR THE BEST PRICE IN
TOWN. FOR THE BEST
SCANNER IN AUSTRALIA

**WORLD'S FIRST CONTINUOUS COVERAGE
THREE MODE COMMUNICATIONS RECEIVER
& SCANNER**

Features

- 25-550 MHz Continuous
- NBFM — For Communications
- WBFM — For BC8TV monitoring
- AM For Air Band
- 20 CH Memory
- Clock Priority CH

\$499

POCKET SIZE SCANNER

SC-4000

**NO COMPROMISE PROGRAMMABLE
HAND-HELD SCANNER THAT
EVERYBODY CAN AFFORD!**

FEATURES:


- 160 MEMORY CHANNELS
- 9 BAND — POLICE, GOVERNMENT, MILITARY, LAND MOBILE, CB, AMATEUR, RADIO TELEPHONE ETC.
- OVER 45,000 CHANNELS
- UNIQUE SPLIT PROGRAMMING SYSTEM
- AUTOMATIC FREQ. STORAGE
- PRIORITY CHANNEL
- LCD DISPLAY
- PROG SCAN/SEARCH RATE
- 24 HOUR CLOCK AND MANY OTHER FEATURES

SPECIFICATIONS:

- FREQ. RANGE: 26-28MHz, 68-88MHz, 138-176MHz; 380-512 MHz
- SENSITIVITY: 0.5µV-1µV depending on Band
- SCAN RATE: 16 CH/SEC
- AUDIO OUTPUT: 0.5W

COMES COMPLETE WITH NICAD
BATTERY, CHARGER AND
ANTENNA

ONLY \$399



NEW

Personal 2-way
radio here at last!

"EMTRON ACE"

A QUALITY 40-CH HIGH POWER UHF CB HAND-HELD
TRANSCIVER • DESIGNED FOR AUSTRALIA
DOC APPROVED


FEATURES:

- 40 CHANNEL OPERATION
- HIGH (2.0W) LOW (0.5W) RF OUTPUT
- OFFSET FOR REPEATER OPERATION
- NICAD RECHARGEABLE BATTERIES
- ILLUMINATED DIAL FOR NIGHT OPERATION
- SMALL IN SIZE — BIG IN PERFORMANCE

APPLICATIONS:

- FARMING
- FISHING, BOATING, HUNTING, BUSHWALKING
- BUSH FIRE CONTROL
- AG SHOWS
- SECURITY
- CONSTRUCTION SITES
- CAR RALLIES
- CROWD CONTROL AND MANY OTHERS

DEALER INQUIRIES WELCOME



**ONLY
\$399**



EMTRONICS

Retail Division of EMONA ELECTRONICS P/L

All Mail to: PO Box K21, Haymarket, NSW 2000
Ph: (02) 211 0531 Ph: (02) 211 0988
94 Wentworth Ave, Sydney, 2000.

Circuit-Board-Design Without the Tedium

smARTWORK™ lets the design engineer create and revise printed-circuit-board artwork on the IBM Personal Computer.

Forget tape. Forget ruling. Forget waiting for a technician, draftsman, or the CAD department to get to your project. smARTWORK™ software turns your IBM Personal Computer into a professional, high-quality drafting tool. It gives you complete control over your circuit-board artwork—from start to finish.




smARTWORK™ transforms your IBM PC into a CAD system for printed-circuit-board artwork. Display modes include both single-layer black and white and dual-layer color.

What makes smARTWORK™ so smart is that it understands electrical connections. Conductor spacing is always correct, lines don't become too narrow, and connecting lines do not intersect other conductors. smARTWORK™ can automatically find and draw the shortest route between two conductors. Or you can specify the route.


smARTWORK™ is the only low-cost printed-circuit-board artwork editor with all these important advantages:

- ☐ Complete interactive control over placement and routing
- ☐ Quick correction and revision
- ☐ Production-quality 2X artwork from pen-and-ink plotter
- ☐ Prototype-quality 2X artwork from dot-matrix printer
- ☐ Easy to learn and operate, yet capable of sophisticated layouts
- ☐ Single-sided and double-sided printed-circuit boards up to 10 x 16 inches
- ☐ Multicolor or black-and-white display
- ☐ 32 user selectable color combinations; coincident points can be displayed in contrasting colors.
- ☐ Can use optional Micro-soft Mouse as pointing device.

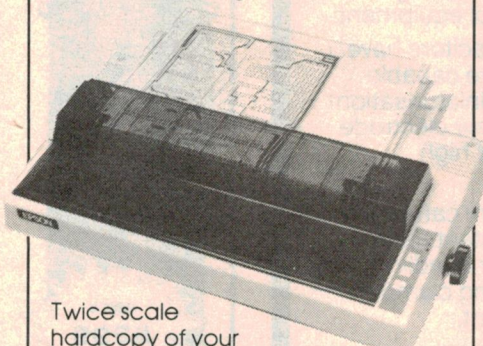

Twice scale hardcopy of your artwork is produced using the Epson dot-matrix printers or the Houston instrument DMP-42 pen-and-ink plotter. Quick 1X check plot is also available from Epson printers.

™smARTWORK™ and "Wintek" are trademarks of Wintek Corporation.

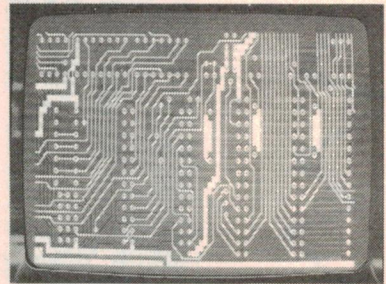

Dual-layer color display of a 2" by 4" section of a 10" by 16" circuit board

The Smart Buy

smARTWORK™ is exceptional value, particularly when compared to conventional engineering workstation costs.

Call or write to us for more information on smARTWORK™. We'll be glad to tell you how smARTWORK™ helps us design our own circuit boards and what it can do for your business.

System Requirements

- ☐ IBM PC, XT or close compatible with 192K RAM, 2 disk drives and DOS Version 2.0 or later.
- ☐ IBM Color/Graphics Adaptor with RGB color or B&W monitor.
- ☐ Epson MX80/MX100 or FX80/FX100 dot matrix printer or compatible with Grafrax.
- ☐ Houston Instrument DMP-42 pen-and-ink plotter (preferred). Small Houstons and HP7475A also supported.
- ☐ Microsoft Mouse (Optional).




Microtrix Pty Ltd
24 Bridge St
Eltham
Vic. 3095
Australia
Ph: (03) 439 5155

Frank Wrobel
B Eng, Dip Eng, Grad IREE (Comm) (Elect)
Managing Director

Australian Distributors: **Microtrix Pty. Ltd. 24 Bridge Street, Eltham. Victoria. (03) 439 5155**

RECORDS AND TAPES

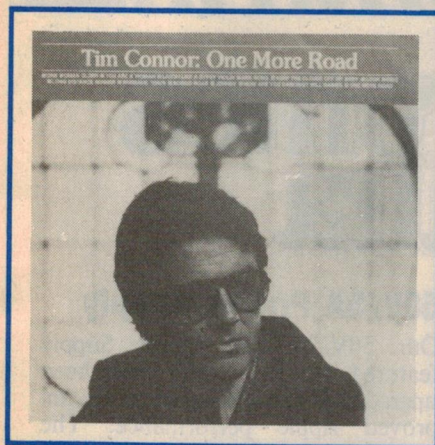

meet here is Tim Connor, a "conditioned" singer and song writer, who is more concerned with social comment and the local scene. There's not one word about the Emerald Isle!

Most, if not all of the songs here are Tim Connor's own compositions, although you would scarcely gather that from the notes; he seems intent on crediting others with the ideas and the inspiration. The titles:

One Woman Older — You Are a

Woman — Laugh Like a Gypsy Violin — Her Song — Keep the Clouds off My Baby — Look Inside — Long Distance Runner — Brisbane Town — Boggo Road — Johnny — How Are You Dancin' Will Gaines? — One More Road.

It's a varied program, with a mix of styles from sentimental, through bluegrass to soft rock, with full lyrics provided on the jacket, good diction, good production and good/average technical quality. Fine, if the contents appeal. (W.N.W.).

DEVOTIONAL ALBUMS

Best Loved Inspirational Hymns, Volume One. "A String Symphony of Praise" by Kurt Kaiser. Stereo LP, Word SPCN-7-01-892210-0. [From Word Records Aust, 18-26 Canterbury Rd, Heathmont, Vic 3135. Phone (03) 729 3777.]

While, in general, Word do an excellent job with their devotional records, they seem somehow to run into problems with orchestral recordings,

such as this one, featuring massed strings.

Time and again, the strings end up with a congested, "edgy" sound — and this latest album is no exception. The problem may be acoustic in origin, it may result from over-dubbing, or it may be due to intermodulation in the mastering process. But whatever the reason, it negates any appeal the album may have for listeners who are sensitive to sound quality — particularly in this era of digital mastering.

It's a pity, because Kurt Kaiser has chosen hymns which are apt to the title and which have been skilfully arranged for orchestra: Morning Has Broken — Precious Lord — Take My Hand — It Is No Secret — Let Us Break Bread Together — I'd Rather Have Jesus — The Lord's Prayer — Softly And Tenderly — Goin' Home & Steal Away — Precious Memories — Beyond The Sunset.

If the frequency range of your equipment is limited, or you're prepared to turn down the treble control, you may still enjoy these "Best Loved" hymns, but I wouldn't recommend it as hifi fare. (W.N.W.)

DEVOTIONAL SONGS

By My Spirit. Stereo LP, Myrrh SPCN-7-01-677806-1. [From Word Records Aust, 18-26 Canterbury Rd, Heathmont Vic, 3135].

I guess one would have to describe this as a sampler disc, although the Word organisation does appear to be issuing more albums than usual containing tracks contributed by various artists. Maybe they sell well as such, thus achieving a double purpose.

First impression, based on the opening tracks, is that the album is intended to cater primarily for the under '30s but some of the tracks which follow would have more general appeal. But there are certainly no old-time hymns among them. For your guidance, I list the titles and artists:

By My Spirit (Leslie



Philips); Live On in My Love (Tom Franzak); Spirit Wings (Joni Tada); These Things Were Done by You (Benny Hester); Baruch Hasham Adonai (Kelly Thompson); Psalm 103 (Brush Arbor); We Give You Praise (Morris Chapman); I Dedicate All My Love to You (Teri DeSario); Go (Leon Patillo).

Some of the artists may already be known to you but they are all accomplished in their own way. Technically, the quality of the disc is well up to standard and you can buy with confidence if the contents appeal. (W.N.W.)

Zenith Data Systems'

"CHOICE"

vs. Their "ULTIMATUM"

Green or Amber Monochromatic Display Monitor Option

Zenith Data Systems presents a COLOR CHOICE in monochromatic monitor displays at a price designed to save you money!

Choose the ZVM 122 Amber or the ZVM 123 Green Phosphor display for crisp character definition and easy-on-the-eyes viewing.

COMPATIBILITY CHART

Zenith Z-100 Desktop
Apple II and III
IBM PC*
Commodore Vic 20*
Compaq*
Texas Instruments 99/4*
Atari 800*
Atari 1200*

*optional cable required

Both the ZVM 122 and ZVM 123 Offer:

- Popular System Compatibility
- Front Access Control Panel
- Constant Intensity 12" Diagonal Display
- 40/80 Character Selection Switch
- Contemporary, Lightweight Style



ZENITH data systems

THE QUALITY GOES IN BEFORE THE NAME GOES ON

For further information contact your local Zenith dealer, or Warburton Franki Distributed exclusively in Australia by:



Warburton Franki


A DIVISION OF THE AN CORPORATION LTD (INCORPORATED IN N.S.W.)
• ADELAIDE (08) 356-7333 • BRISBANE (07) 277-0222 • HOBART (002) 28-0321
• MELBOURNE (03) 795-9011 • PERTH (09) 277-7000 • SYDNEY (02) 648-1711
• AUCKLAND N.Z. (09) 50-4458 • WELLINGTON N.Z. (04) 69-3016



Playmaster Series 200 stereo amplifier.



Sony CDX-5 car audio CD player.

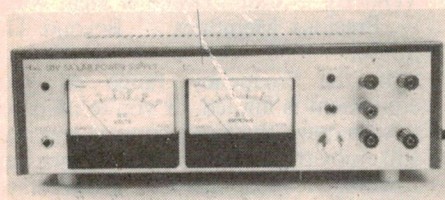

50V/5A switchmode power supply.

Next month in Electronics Australia

Playmaster Amplifier

A last minute technical hitch forced us to hold over the Playmaster Series 200 amplifier from this issue. We've now solved the problem and will bring you the constructional details next month. See also page 49.

Sony Car CD Player

Sony is the first audio manufacturer to market with an in-car CD player — the model CDX-5. We take a close look at this brilliant new product in May *Electronics Australia*.

50V/5A Power Supply

Our 50V/5A Lab Power Supply featured in July 1983 has been upgraded to provide substantially improved ripple performance. The original front panel, case and transformer have been retained but inside there's a new PC board.

True RMS-DC Adaptor


This low-cost adaptor plugs into your digital multimeter and provides true RMS voltage measurements at frequencies up to 100kHz. May *Electronics Australia* has the construction details.

* Although these articles have been prepared for publication, circumstances may change the final content.

APRIL CROSSWORD

ACROSS

1. Circuit connector. (9,4)
10. Energises a battery. (7)
11. Type of scrambler. (7)
12. What a computer can draw. (4)
13. Magnetic unit. (5)
14. Contracted term for certain controls. (4)

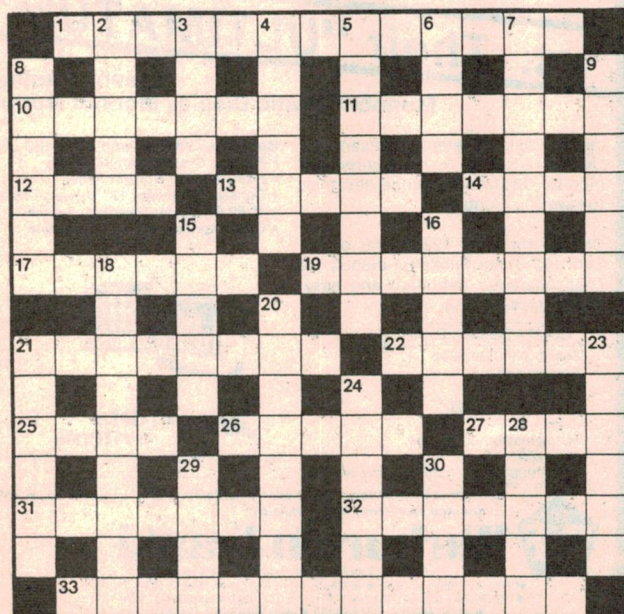


17. Turntable fault. (6)
19. Radio circuit. (8)
21. Losing charge. (8)
22. Physicist who solved the black body problem. (6)
25. Programmable read-only memory. (4)
26. A telephone line. (5)
27. Reduce signal amplitude. (4)
31. Adding inductances, etc. (7)
32. Loss of charge. (7)
33. Characteristic of certain displays. (5,8)

DOWN

2. Inductors do it. (5)
3. Wire screen, or Faraday ----(4)
4. Shape of some antennas. (6)
5. Type of programming language. (3-5)
6. Term formerly used for memory. (4)
7. This sort of gain seems low! (3-6)
8. Counting device. (6)
9. Possible functional description of a head. (6)

SOLUTION FOR MARCH



15. Operates a tape deck. (5)
16. Inventor of the AC induction motor. (5)
18. Radiation with wavelength usually expressed in cm. (9)
20. Neon may be described as such. (5,3)
21. Type of antenna (6)
23. Magnetic accessory. (6)
24. Type of computer. (6)
28. Suitable position of voltaic cell electrodes. (5)
29. Early recording medium. (4)
30. Remove insulation. (4)

50 and 25 years ago...

"Electronics Australia" is one of the longest running technical publications in the world. We started as "Wireless Weekly" in August 1922 and became "Radio and Hobbies in Australia" in April 1939. The title was changed to "Radio, Television and Hobbies" in February 1955 and finally, to "Electronics Australia" in April 1965. Below we feature some items from past issues.



April 1935

Baby passifier: after car radio comes perambulator radio; American manufacturers claim that a restive child makes no further trouble when dance music is switched on.

Unstable busses: London trolley busses carry heavy copper coils on their roofs to prevent static which might interfere with broadcast reception. Now the trolley bus company is complaining that the copper coils upset the balance of the buses, especially on steep cambers, and the post office is making tests to find some more suitable preventative.

Standard equipment: two million USA cars are equipped with radio receivers, and now American car manufacturers all consider radio standard equipment, or make provision for car radio connections.

Thoroughly modern: the electric oven and refrigerator shown at the Electrical and Radio Exhibition is perhaps one of the best examples of how home equipment is being designed for the modern flat.

Another new notion is a range with an element which takes the place of the hot plate and gives rapid heat. The utensils rest directly upon the glowing coils, so that there is no intervening space to reduce efficiency.

Also calculated to delight the modern housewife is an electric casserole which boils, bakes and stews. There's also an electric toaster which you regulate according to whether you require the toast light, dark or burnt.

Then the new washing machines. One machine boasts a new vacuum cup which draws the water through the clothes instead of the agitator method. Other washing machines had an electric wringer.

Having electrically washed, you can now complete the job on an electric ironing machine.

Light powered motor: another step forward in the search for machines which can harness the natural energy of sunlight was demonstrated recently by Dr C. W. Hewlett.

The model, which used unusually sensitive light cells of the selenium type, derived sufficient energy from sunlight or even artificial light to run a small motor.

Four of the cells connected together operated a small motor rated at four ten millionths of a horsepower. No practical applications for the sun driven motor have been undertaken, for its power, which might be likened to one flea-power or less, is too low to be of any immediate practical value.



April 1960

Flying telescope: a telescope that will be mounted in the nose cone of a Skylark rocket to take pictures of the sun and measure the intensity of ultraviolet light has been developed at the London University College.

It will be flown in the Skylark at the Woomera range in South Australia shortly. Skylark is purely a research rocket, originally designed for carrying instruments into the upper atmosphere.

Gas turbines: a large American aircraft manufacturer believes that gas turbine engines will eventually power radically different earth moving tractors, fire engine pumpers, a highway freight tractor and an air cushion vehicle.

The company is the Boeing Airplane Company, which is currently engaged in a vast gas turbine development program. US developed gas turbines may take to the air in the spring of 1960 in both a

helicopter and a turboprop executive plane. Both planes will probably be production models of big American aircraft manufacturers.

Automatic power control: the Electricity Commission of NSW will place in service during 1960 a comprehensive computing and control installation to regulate power interchange between its own system and the systems of the Snowy Mountains Authority and the State Electricity Commission of Victoria.

In addition, the equipment will automatically load and unload generating units in seven power stations with a total capacity of one million kilowatts, to achieve greatest efficiency of operation.

The power interchange control section of the equipment is of a type widely used on the huge interconnected systems of the USA, and similar equipment is being installed by the Victorian and Snowy Mountains authorities.


Lighting the canal: for the first time in its 45 year history, the Panama Canal will bear ships from ocean to ocean by night as well as by day. The darkness that up to now has prevented the operation of its three locks after nightfall will be dispelled by 750W GE fluorescent lights currently being installed.

The six foot, two lamp units, normally used for street lighting, are being mounted atop the walls of the locks on 20 foot aluminium towers. The poles are hinged at their bases to enable them to be swung outward for the passage of especially wide vessels.

TV remote controller: recent television receivers released in Australia incorporate a remote tuning control system in which a non-electrical remote control unit is employed.

The system uses ultrasonic audio waves to act as the connecting link in the control circuit. The ultrasonic waves, far higher in frequency than sound waves, are generated in the hand control unit and are used to control relay circuits in the receiver.

The "Son-R" control unit, used with the Admiral set, contains two short brass rods which are machined so that they vibrate at above audio frequencies when struck. The unit has two push buttons and, when each is pressed, it causes a small hammer to strike the appropriate rod. The rods used are tuned to frequencies of 38.285Hz and 39.285Hz.

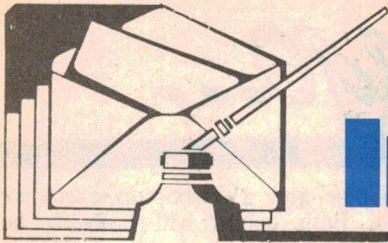

Information centre

Comments on CDI crossfire

I have read a reply to a letter from L.H. of Concord West in the Information Centre columns of the December issue of EA. Part of the reply deals with crossfire problems associated with capacitor discharge ignition. One sentence of the reply is open to challenge; ie, "probably the worst car in this respect was the VW Beetle but it only had four cylinders!"

I have been running Beetles with CDI for about 20 years with no crossfire problems. My first Beetle, a 1962 model with a 6V system, really benefited from CDI. So much so, that when I replaced the car with a new model in 1972, I built and installed a 12V CDI within a few weeks of taking delivery! The old Beetle still had plenty of life in it when I sold it after 75,000 miles; the engine had certainly not been damaged by crossfire.

Of course, with all the fuss about crossfire, I did take the precaution of separating the plug leads on the new car when I installed the CDI. Also the distributor cap on the VW is fairly large, so this is unlikely to be a source of trouble. In any case, I believe I could recognise crossfire if it occurred.

TV Interference from Stereo Synthesizer

I have recently purchased and constructed the Stereo Synthesizer which was featured in EA for September, 1982.

The unit operates normally in the audio field on any of the Sydney channels and on playback of prerecorded material. However, I have one problem which I cannot overcome. When the unit is functioning and the TV set is on Channel 0 or 2, an irregular interference pattern appears on the screen.

I have checked the circuit and it appears to be OK. I have also removed both the input and output connections but this does not make any difference. It appears it may be the transformer which is different from the one specified. Also two 1000pF/6kV ceramic capacitors were

The lid has been off the CDI once in 14 years to glue a crack in the potcore encapsulation; the inverter whistle was a source of annoyance. The main ignition problems that I have had relate to the short life of carbon cored plug leads. These were eventually replaced with copper cored cables and separate suppressors.

The new car is still going strong after 14 years and 78,000 miles. Barring write offs, it should be good for at least another five years. (B.D., Magill, SA.)

• Thank you for relating your experiences with capacitor discharge ignition systems in VWs. We note with interest that you took the precaution of separating the plug leads when installing the CDI. If this is not done, crossfire can certainly be a problem.

Proximity detector for cars

Recently, a situation arose whereby a man in a delivery van reversed into the front of my parked car. Following the subsequent altercation and the financial settlement for the damage caused, it occurred to me that a warning device to indicate the proximity of a rearward vehicle would be a boon.

substituted for the 470pF/2kV capacitor across the power switch.

These are the only modifications to the original circuit. Can you please help me? (B.M., Sylvania Waters, NSW.)

• It is doubtful whether the transformer is at fault. Nor is your substitution of 1000pF capacitors, although you could have made do with just one capacitor rather than putting two in series as the value is not critical.

Unfortunately, you have not given a precise definition of the video interference so it is a little hard to make a diagnosis of the problem. However, we are inclined to the view that it is the internal clock for the bucket brigade device which is causing the interference. As such, it is difficult to suggest a cure apart from keeping the TV set and its antenna lead as far away as possible from the synthesizer unit.

I visualise a device capable of emitting an infrared or ultrasonic pulsed signal from the rear of the driven vehicle, and a companion receiver to pick up the reflected signal. The time difference would be decoded and interpreted as the range between the two vehicles. This information would control a beeper such that the beeper would beep at a frequency of say 1Hz when the range is two metres, progressively increasing up to a continuous note when the range is say 25cm. (R.P., West Ryde, NSW.)

• While such a device would be relatively easy to design, it's not worthwhile as there is already a commercial unit available. Dick Smith Electronics advertised an ultrasonic range sensor in our November issue for \$59.

Questions on the Ignition Killer

I am a student at the NSW Institute of Technology. As a project, my course requires that I build a simple circuit and write a technical report on it. I chose the Ignition Killer which was described in the February 1984 edition of your magazine.

A few questions: why have you used a 15V zener diode, not a different size? What voltages are we to expect and how are they caused? Why has the capacitive filtering used a 22Ω resistor and a 1000μF capacitor? Why has the 555 been connected up the way shown when there are many other ways to connect this IC? What improvements have been suggested for the circuit and why? (G.B., Homebush, NSW.)

• Let's consider your questions in the order raised.

First, the function of the 15V zener diode is to clamp supply line transients to 15V and thus protect the 555 from excessive voltages. To explain, an automobile electrical system is quite "noisy." Large voltage spikes of the order of several hundred volts superimposed on the main 12V DC rail can occur. These voltage spikes are produced by switching transients, as when a solenoid turns off. Also, ignition spikes can be capacitively coupled into the circuitry.

By including the 15V zener, any large voltage spikes are clipped to the zener voltage and thus effectively eliminated.

The 22Ω resistor and 1000μF capacitor provide supply line isolation and filtering. The resistor value is something of a compromise. It is made as high as possible in the interests of supply line isolation, but must also be low enough so that there is only a small voltage drop across it when the relay pulls in.

The capacitor value is not all that critical. 1000μF just happens to be a good practical value, both in terms of cost and physical size.

The 555 IC has been wired in a standard astable oscillator configuration. In other words, the oscillator "free-runs" when triggered, thereby continually turning the relay on and off until power is removed from the circuit. Resistors RA and RB, together with the 2.2μF timing capacitor, set the frequency of oscillation. The capacitor voltage varies between $\frac{1}{3} V_{cc}$ (V_{cc} is the supply voltage) and $\frac{2}{3} V_{cc}$ as described in the article.

Of course, it's also possible to wire a 555 for monostable operation (ie, the pin 3 output goes high for a set time after triggering before switching low again). For a more detailed explanation on how the 555 works, we suggest that you get hold of an IC data book.

The circuit can be improved by adding a 15Ω 10W resistor in series between the relay contacts and the ignition coil. This is designed to prevent possible damage to the coil during extended operation.

Auxiliary battery for car burglar alarm

I am concerned about the auxiliary battery for this alarm which is charged via D25. It has been pointed out to me that if this battery was to become flat, a high-charging current would result which could cause damage.

In the July, 1984 issue a reader suggested an additional diode and 39Ω resistor to cure the problem. Could you please explain where these components should be placed and whether you agree with this modification? (J.G., Thornbury, Vic.)

● As we explained in the July, 1984 Information pages, the auxiliary battery should never become heavily discharged since it is on permanent floating charge. The only way it can happen is if it was disconnected from the vehicle battery for some time. Only if this did happen would it be necessary to recharge the battery via a suitable current limiting resistor.

If you want to install the suggested 39Ω resistor and diode, they could be connected in parallel with the 3A fuseholder (the fuse should be omitted), with the anode of the diode connected to the battery.

Electronics Australia Reader Service

"Electronics Australia" provides the following services:

PHOTOSTAT COPIES: \$3 per project, or \$6 where a project spreads over multiple issues (price includes postage). Requests can be handled more speedily if projects are positively identified, and if not accompanied by technical queries. We reserve the right to supply complete back issues instead of photostats, where these are available.

CHASSIS DIAGRAMS: For the few projects which require a custom metal chassis (as distinct from standard cases) dyeline plans showing dimensions are normally available. \$3 including postage.

PC BOARD PATTERNS: High contrast, actual size transparencies: \$3, including postage. Please specify positive or negative.

PROJECT QUERIES: Members of our technical staff are not normally available to discuss individual projects, either in person at our office, or by telephone.

REPLIES BY POST: Limited to advice concerning projects published within the last three years.

Charge \$3. We cannot provide lengthy answers, undertake special research, or discuss design changes. Nor can we provide any information on commercial equipment.

OTHER QUERIES: Technical queries outside the scope of "Replies by Post" or submitted without fee may be answered in the "Information Centre" pages, at the discretion of the Editor.

COMPONENTS: We do not sell electronic components. Prices and specifications should be sought from advertisers or agents.

BACK ISSUES: Available only until our stocks are exhausted: \$3 (includes post and packing and storage fee).

REMITTANCES: Must be negotiable in Australia and made payable to "Electronics Australia". Where the exact charge may be in doubt, we recommend submitting an open cheque endorsed with a suitable limitation.

ADDRESS: All requests to the Assistant Editor, "Electronics Australia", Box 227, Waterloo 2017.

Railmaster Train Controller

Being both an electronics and model railways enthusiast, I was delighted with the Railmaster train controller and the two sound effects circuits that you recently published. I have just constructed the Railmaster and would appreciate your comments on the following problems I experienced.

(1) Overload protection: pin 14 of IC1d is supposed to go low when the voltage across the 0.1Ω resistor is sufficient to cause pin 13 to be at a higher voltage than pin 12. The problem is, it does not go low, but merely reduces proportionally to the width of the output pulses.

With the unloaded output showing about 8V on a DC meter, a short circuit will pull pin 14 back to about 5V. This reduces the pulse width fractionally, lights the overload LED (not very brightly) and causes pin 8 of IC2c to go low and energise the buzzer. If the unloaded output is increased to maximum (12V DC as averaged by the meter), the voltage at pin 14 of IC1d drops to about 3V, but the effect on the pulse width is no greater.

I have tried varying the value of the 3.9kΩ resistor on pin 12, as well as the .01μF capacitor on pin 13. Neither made any difference; nor did replacing D8.

I examined the voltage at pin 13 of IC1d with a CRO and found that it was peaking above the 0.31V on pin 12, which explains why the output of the op amp was reducing — the lower voltage was the average of the output of IC1d. I would have thought that increasing the value of the .01μF filter capacitor would have solved the problem, but even a 0.1μF made no difference.

I solved the problem by connecting

another 1N4148 diode in series with a 5.6kΩ resistor from pin 3 of IC2a to pin 8 of IC2c (cathode to pin 8). When pin 8 goes low, which it always does reliably, the pulse width is greatly reduced and the maximum short circuit current is about 800mA.

The overload does not trigger until the current exceeds 2A. It is then held at 800mA until the short circuit is removed. Incidentally, the short circuit current can be varied by changing the value of the 5.6kΩ resistor in series with the diode.

(2) Speed monitoring: I also had a problem with this part of the circuit. Transistor Q4 is supposed to be turned hard off during pulses to the motor. In its original form, the circuit did vary the pulse width as the motor speed changed with load, but so little it wasn't really effective.

A check with the CRO revealed that Q4 was only just turning off, resulting in an initial spike of the output pulse reaching pin 12 of IC2d. This spike was being seen as part of the back-EMF voltage. Because the voltage of the spike always remained constant, a falling back-EMF voltage had a greatly reduced effect on the output of IC2d pin 14.

I increased the 470Ω resistor on the base of Q4 to 2.2kΩ and that completely solved the problem.

I trust that you will find the above information to be of some use. In particular, I would appreciate your comment on the problem I encountered with the short-circuit protection. As I have modified it, the controller works extremely well, its smooth low-speed performance being a delight to experience. (J.K., Blackburn South, Vic.)

● The overload protection circuitry in your Railmaster was functioning correctly in its original form.

What happens is this: if an overload

occurs, the increased voltage across the 0.1Ω resistor is detected by pin 13 of IC1d, and the output of IC1d switches low. This in turn switches off the output voltage to the track. The voltage across the 0.1Ω resistor now drops to 0V and the output of IC1d switches high again, and so on indefinitely.

Thus, in the overload condition, the output of IC1d switches rapidly between high and low, thereby reducing the pulse width of the track output voltage and limiting the short circuit current to about 3A.

Your modification to the circuit is a form of foldback current limiting which detects the maximum current and then limits the current to a lower level (800mA). It can be regarded as something of an improvement on the method we used in that the dissipation will be reduced.

The necessity to increase the resistor value at the base of Q4 suggests that this transistor was not fully saturating (possibly due to low gain). An alternative would be to reduce the value of the $15k\Omega$ base driving resistor.

Problems with the brake lamp flasher

I built the Brake Lamp Flasher featured in the November, 1983 issue of EA, using unknown brand ICs. Some modifications had to be made in order to

get the circuit working properly. The "CMOS Cookbook" suggests that some brands of IC produce peculiar results when used in oscillator circuits because of internal zener diodes.

The clock rate was found to be far too high. Changing the $4.7\mu F$ capacitor to $10\mu F$ and the $330k\Omega$ resistor to $470k\Omega$ put this right. Consequently, the initial start up period was too long, requiring the $150k\Omega$ resistor be changed to $56k\Omega$.

The repeat delay was found to be one minute, again far too long. This was remedied by adding an $82k\Omega$ resistor across the $22\mu F$ capacitor.

Since I wanted to utilise the rear fog lights, as used on some European cars, I decided to change the output to a PNP 2955 type and drive it with a Darlington NPN, type MJE800. This would probably be better for local cars with four stoplights, since the lamp base earth circuit is not disturbed. To isolate the two different supply circuits to the lamps, I included two five-amp diodes. The circuit works well. (G.T., Murrumbidgee, Vic.)

- It is true that the internal protection diodes do affect the frequency when inverters are used in oscillator circuits. However, that does not apply with the Brake Lamp Flasher circuit which uses a Schmitt trigger (IC1a) for the oscillator. The problem of hysteresis was alluded to briefly in the article and is the cause of the variation in oscillation frequency you have noted.

While we do not disagree with the changes you have made or suggest, we find it surprising that the repeat delay could have been as much as one minute and that it could be reduced back to the correct five-second period by adding the $82k\Omega$ resistor across the $22\mu F$ capacitor. It sounds as though this capacitor was well out of tolerance.

Notes & Errata

DOORWAY MINDER (February, 1985, File 3/MS/114): The inverting and non-inverting inputs to IC1 have been transposed on the circuit diagram. The wiring diagram is correct.

GUITAR TUNER (CDI, February, 1985): The author has advised that the supply pins to IC1 are shown transposed on the circuit.

EPROM COPIER (December, 1984, File 2/CC/92): This device is suitable for programming 2532 EPROMs, but cannot be used to program 2732 devices unless some of the pin connections are changed.

The 2732 has pin 21 as A11, pin 20 as Vpp and pin 18 as CE-bar. The remainder of the pins are compatible with the 2532. Note that the pinout data provided on p57 of the December, 1984 issue is correct only for the 2532.

Readers are also advised that the Texas Instruments TMS2716 is not compatible with other 2716 devices. ☺

Hitachi VT-88E hifi stereo VCR cont. from p.27

was $-5dB$ at $20Hz$ and flat up to $10kHz$, where it began to roll off to $-0.5dB$ at $15kHz$ and $-1.5dB$ at $20kHz$. At half speed the signal was $-4dB$ at $20Hz$, $-1dB$ at $15kHz$ and $-2dB$ at $20kHz$.

Again, this drop in frequency response, $1dB$ less for the full speed at $20Hz$ and $0.5dB$ less for the half speed above $15kHz$, is academic and unnoticeable under listening tests.

Linearity was also tested at half speed. This involves recording a $1kHz$ signal at decreasing signal levels and noting the playback response. The VT-88E was $2dB$ high at -60 and $-70dB$, and linear at signals above this — a very reasonable result.

Signal to noise ratio was measured as $80dB$ with respect to a $+5dB$ signal level. This is a very good result and equals its claimed specification. Crosstalk between left and right channels with respect to a $+6dB$ signal level was $56dB$ at $100Hz$, $60dB$ at $1kHz$ and $61dB$ at $10kHz$. These results are very good.

For both of the above measurements, the results were virtually the same for both full and half speed operation.

How it sounds

On listening tests we found it difficult to distinguish between the recording and the source signal, which was from a CD player. Clearly the levels of distortion measured on these VCRs is not audibly apparent. The most impressive feature when comparing the recorded signal with the original source is the lack of rise in background noise and retention of the high frequency response. In short, the sound quality is excellent.

However, as with other video recorders, the transport mechanism leaves a lot to be desired when recording and during playback. The main problem is the slow response time of the tape mechanism. It is necessary to wait for the tape to spool itself around the tape head before play or recording can begin.

Similarly, on stop, it is necessary to

wait for the tape to unspool itself from the drum before rewind or fast forward functions operate. So there is some sacrifice in operating convenience, compared with a normal audio cassette recorder.

The Index feature which allows the tape to move forward or in reverse to an indexed location is an excellent feature, although only operative in the half speed mode. The indexing can be set at any and at as many positions on the tape as desired. This helps negate the tape transport objections. In fact the Hitachi VT-88E is a major competitor with standard audio cassette recorders, with the added bonuses of full-function video recording and infrared remote control as well.

Recommended retail price of the Hitachi VT-88E is \$1450.

In summary, a most impressive and versatile performer in terms of both video and audio. (J.C.) ☺

L. E. CHAPMAN

122 PITT ROAD, NTH CURL
MAIL ORDERS: BOX 156, DEE WHY, NSW. 2099.
TELEPHONE 93-1848.

SUPER SPECIAL BSR GRAMO MOTOR AND PICKUP 240V

3 speed 33-45-78 includes
cartridge and
stylus turnover



\$12

P&P NSW \$2.75
INTERSTATE \$4.20
WA, NT \$5.20

SUPER SPECIAL FM STEREO KITS



Sets of 3 modules includes FM tuner decoder
and if detector. Circuit diagram supplied.

ONLY \$22 PP \$1.60

Send stamped envelope for copy of Elec-
tronics Australia magazine review of the units.

SPECIAL BALANCE METERS CENTRE ZERO

\$2




PP
\$1

6P VALVE SOCKETS

9 pin 25c — 7 pin 25c — octal 25c.

SPECIAL DUAL VU METERS



\$3

PP
\$1

SPARK GAPS 10 for \$1

455KC IF Trans
for valve radios
\$1 each

THERMISTERS 4 for \$1

OS coils
75c each

DIODES BY 406 10 for \$1

CAR RADIO
Suppressors
5 for \$1

SPECIAL

Chrome 1/4 shaft push-on knobs. 10 for \$1.
Usual price 60c to 80c each.

IC SOCKETS

24 pin 35c
28 pin 40c
18 pin 25c

Slide pot knobs

10 for \$1

TRANSISTORS AD161-162 \$1 pair
100 mixed Capacitors, fresh stock, all
handy values \$2 AD149 \$2 pair
100 mixed resistors, handy values \$2

STICK RECTIFIERS

TV 20-SC \$1 each

VALVES

EF86 \$4.00	VT128-955 \$5	7V4 \$4
12AX7 \$4.00	CV423 \$4	6CM5 \$6
12AU6 \$4.00	879 \$4	6CU5 \$5
12AX7 \$4.00	EM84 \$5	1L4 \$4
6BM8 \$3.00	VRI01-102/28054 \$4	6BW7 \$4
6BL8 \$3.00	IC4 \$5	6AT6 \$4
6BD5 \$4.00	EL37 \$12	6BA8 \$4
6K8 \$10.00	ID8 \$4	6GW8 \$5
6K7 \$7.00	41 \$6	6BD6 \$4
SAS4 \$4.00	42 \$6	6AM6 \$4
6V6 \$10.00	6B7 \$6	6BF5 \$4
6AL3 \$4.00	80 \$6	00V03 \$6
6GV8 \$4.00	6F6 \$10	12AV6 \$6
6SA7 \$5.00	6BX6 \$4	12AN7 \$5
6Y9 \$4.00	6BD7 \$5	12AO5 \$6
6BE6 \$5.00	6H6 \$5	12AT6 \$5
6BH5 \$5.00	6AK4 \$5	6AD8 \$5
IT4 \$2.00	6D06 \$6	6CW5 \$5
6AV6 \$3.00	6CW7 \$5	2E26 \$7
ID8 \$4.00	IC7 \$5	5Y4 \$6
VT121-955 \$5.00	IK6 \$5	5V4 \$6
ECH33 \$7.00	IM5 \$5	25Z5 \$4
6CV1T163G \$3.00	6EH7 \$4	6BK7 \$5
VT86 \$5.00	6DX8 \$4	30AE3 \$4
6H6 \$4.00	6AW8 \$5	6BV7 \$5
6V4 \$5.00	6W6 \$5	30A \$4
6U7 \$7.00	6V9 \$5	5C8 \$4
6V4 \$3.00	6E17 \$4	VT86 \$4
6V4 \$3.00	6ES8 \$4	6BD6 \$5
6AQ5 \$6	6BH8 \$5	12BY7 \$4
6BU8 \$4	6C08 \$5	56B26 \$5
6N3 \$3	IX2 \$4	57 \$5
6X9 \$5	6S2 \$3	58 \$5



SPECIAL

12 mixed switches \$4 PP \$1.40 not a
lucky dip, c wot u get!

POTS ROTARY

1/2 Meg 50c	10K Switch 50c
1 Meg 50c	250K 30c
100K 30c	50K 30c
100K Switch 50c	20K 30c
50K Double Pole Switch 50c	10K Min Pots 25c
7.500 30c	50/ohm 50c

Extra Pots 1/4m LIN 50c
1/2 or 1 Meg Switch 50c
1/2 meg dual Concentric tapped at 100K \$1
2 meg ganged double pole switch \$1
1.5 meg dual ganged 50c 2 meg ganged log \$1
1 meg dual ganged \$1 1/2 meg dual ganged LIN 75c
25K 50K dual ganged Concentric double switch \$1
100K dual ganged linear pots 75c
200K single line 30c 10K sub min log pots 50c
20K wire wound 75c 250K ganged pots 75c
dual log 10K 75c 25K in ganged pots 75c

SUPER SPEAKER SPECIAL

15/ohm 2 1/4 inch four for \$1 P.P. \$1.40

MICRO SWITCHES

5A 250V 50 cents

1/2 meg dual \$1	1K dual \$1
1 meg dual \$1	50K single 50c
2 meg dual \$1	250K single 50c
25K dual \$1	10K single 50c
250K dual \$1	2 meg single 50c

TOUCH MICRO SWITCHES

As used in front control panels in colour TV
sets. **4 FOR \$1**



SPEAKER
2-way crossover
networks
30 WATTS
RMS \$2

CRYSTALS for colour TV \$1 each

AM FM TUNING CAPACITORS

\$7



4 PIN SPEAKER SOCKETS

4 for \$1

FERRITE RODS

Bin x 1/4in with coils \$1.50

TELESCOPIC AERIALS

Opens up to 38 inches \$1.50

PICKUP CARTRIDGES

Ceramic BSR Turnover Stylus universal type \$5

TOGGLE SWITCHES

4 FOR \$1



Capacitors ELECTROS

2500 16V 4 for \$1	22 UF 16V 10 for \$1
220 16V 4 for \$1	330 UF 63V each 50c
1000 UF 50V each \$1	1MFD 50V 10 for \$1
1000 UF 63V each \$1	33 UF 10V 10 for \$1
22 UF 160V 3 for \$1	33 UF 10V 10 for \$1
1000 UF 16V each 50c	1MFD 50V 10 for \$1
63 UF 25V 5 for \$1	33 UF 10V 10 for \$1
470 UF 63V each 50c	0.0039 1500V
47 UF 160V 3 for \$1	8 MFD 350V each 50c
470 UF 25V 4 for \$1	6N8 1500V each 50c
40 UF 25V 5 for \$1	220 UF 35V 4 for \$1
470 UF 40V 3 for \$1	1000 UF 25V each 50c
47 UF 10V 10 for \$1	680 UF 50V each 50c
100 UF 25V 5 for \$1	22 UF 10 for \$1
25 UF 50V 10 for \$1	100 UF 6.3V 10 for \$1
47 UF 16V 5 for \$1	330 UF 25V 3 for \$1
220 UF 50V each 50c	2000mfd 25V chassis mount \$1
47 UF 200V each 50c	50mfd 400V chassis mount \$1
1000 UF 10V 4 for \$1	Dual 75mfd 65V 20mfd 450V chassis mount \$1
2.2 UF 200V 4 for \$1	

SPECIAL SHIELDED CABLE SINGLE STRAND

25 meters for **\$2.50**

SUPER SPECIAL


ICs new packed in original tubes.
20 different popular types for **\$2** P.P. \$1 anywhere
in Australia.

CONTACT SWITCHES

EBM3320 4 for \$1

SPEAKER SPECIALS

5x4 4/ohm	\$4
5x7 7 watts RMS in 8 or 15/ohm	\$4.50
6x4 in 8 or 15/ohm	3.50
9x6 10 watts RMS in 8 or 15/ohm	\$6
8x4 7 watts RMS in 8 or 15/ohm	\$4.50
6 inch single cone 15/ohm	\$4



Colour convergence coils

Delta 11270 \$5

Hor Drive Transformer for Colour TV —

3021, 39/6 \$3

DIN PLUG SOCKETS

4 FOR \$1.00

Power Transformers

240V 2 amp 30V 12V	\$10
Prim 240V sec-240V 60MA	\$5
pp: NSW \$2; Qld, Vic. \$4.80; Other states \$6.	

240V 285 ASIDE 6.3 60ml \$10

pp: NSW \$3; Qld, Vic. \$4.80; Other States \$7.

Transistor TV Tuner

MSP 46300-5
11 volt



\$10
p.p. \$1.40

4 POSITION PUSHBUTTON SWITCH

\$1.00



MAGNETIC PICKUP CARTRIDGE

Diamond Stylus ES70SH Golding \$15

DIODES

AN752 4 for \$1	OP478 10 for \$1	OA662 4 for \$1
DS150A 75c	IN5059 10 for \$1	BY188A 3 for \$1
BA244 4 for \$1	IN4001 10 for \$1	AT324 4 for \$1
DS230 \$1	OA645 50c	AT347 4 for \$1
BA219 6 for \$1	BA118 10 for \$1	AT322 4 for \$1
DS130 4 for \$1	BA217 4 for \$1	C1051H each \$2
O404 4 for \$1	AN755 10 for \$1	2SB405 50c
BAV18 10 for \$1	B279 10 for \$1	2SB303 50c
DS130yb 30c	OP478 10 for \$1	IN4001 10 for \$1
	646 50c	OA626 4 for \$1

JACK PLUG SOCKETS

2.5mm	5 for \$1
3.5mm	4 for \$1
6.5mm	3 for \$1

PIEZO LOW IMPEDANCE MICROPHONE Desk Type

RRP \$42.00 NOW **\$10.00**

HOR OS COILS

for B & W TV sets \$1

TRANSISTORS

OC9554 75c	B234C 50c	BY84 4 for \$1
OC987 50c	BS140 50c	DS113AC \$1
OC988 50c	BS14E 50c	80202 50c
OC968 50c	03300 50c	80139 50c
OC967 50c	033E 50c	2SB186 50c
OC9304 4 for \$1	BS140 50c	25C154B \$1
AC128 50c	80202 50c	AS128 50c
608DK 4 for \$1	BC548 50c	BF494 50c
BF469 50c	OA626 4 for \$1	A437 50c
AC187 50 cents	OA662 4 for \$1	2SB77 50c
Sanyo DS18 1	BY188 3 for \$1	2SB75 50c
C1048C \$1	AT324 4 for \$1	BP559 50c
BC559 50c	AT347 4 for \$1	BE549 50c
2SB274V \$2	AT322 4 for \$1	A2090 50c
D400 75c	C1051H each \$2	106F1 50c
RD516 \$2	2SB405 50c	2SA15 50c
C875F \$1	2SB303 50c	2350 50c
OC9524 \$1	OC955 75c	2SA351 50c
C106F1 50c	OP57 50c	8544 50c
OC957 75c	2N1111 50c	C1048P \$1
BA2622 50c	BP139 50c	2N2175 50c
	2SB407 \$2	B1135 50c
		BF245A 50c

POWER TRANSFORMERS

240V pair 25V taps
260V
117V \$10


MUTING SWITCHES

EBM209 4 for \$1

Infra Red Audio Transmitter

for colour TV

3102-108-50301



\$7



Video Det & AFT

3102-108-58741



SPECIAL! TRANSISTOR EAR PIECES

with plugs & leads — top
quality in sealed plastic packets

3.5 to 3.5MM 7ft	4 for \$1
6.5 to 3.5MM 7ft	\$1
6.5 Single ended	50c

EA marketplace EA marketplace

FOR SALE

SOFTWARE: Over 650 disks of public domain software — CPM — CPMUG, SIG/M, C-UG on over 150 formats. IBM — PC-Blue and PC-Dos. \$10 per vol \$15 per 2. Catalogues on disk or hard copy \$12 (specify IBM or CPM). P+P \$1 on all orders —special price on full sets. R. B. Archer & Assoc, PO Box 696, Ringwood, Vic 3134.

SGS TRANSISTORS: BD139 — 10 for \$2.50, 2N3055 — 10 for \$6.00. Post and pack only \$1.00 to L.M.F. Products, PO Box 384, Cootamundra, 2590.

SUPER 80: Assembler/Editor \$15 cassette. Disassembler \$9. R. Vowels, 93 Park Dv, Parkville 3052.

EX-ABC AUDIO TAPES: ¼" wide on 10½" metal spool, \$6.85; plastic spool, \$5.85; 7" spool, \$2.25; 5" spool, \$1.25. Post extra. Also in stock: ½", 1" and 2" tapes. Waltham Dan, 96 Oxford St, Darlinghurst, Sydney. Phone (02) 331 3360.

NEW RADIO VALVES: For entertainment or industrial use. Waltham Dan, 96 Oxford St, Darlinghurst, Sydney. Phone (02) 331 3360.

BLACKTOWN NEXT TO TELECOM OFFICE
Electronic Components
PC Boards, Computer Repairs
OPEN MONDAY TO SATURDAY
(02) 621 5809
30 Campbell St BLACKTOWN NSW
CQ ELECTRONICS

DIGITAL THERMOMETERS

FULL KIT — \$49.95 INC. ASSM PROBE, 'PAC TEC' CASE & FRONT PANEL ASSEMBLED & GUARANTEED — \$74.50.

MINIATURE 3½ DIGIT D.V.M. MODULE (10mm HIGH DISPLAY)

FULL KIT — \$27.95 ASSM & TESTED — \$35.95

P.C.B. & DATA — \$7.95 TCS 7106 D.V.M. CHIP — \$11.95

LARGE 3½ DIGIT L.C.D. DISP. — \$8.95

ALL PRICES INCLUDE S/TAX. POST & PACK ADD \$2.75 PER ORDER

BANKCARD ACCEPTED.

P.O. BOX 132
MELB. AIRPORT 3045

SUITE 10, 4TH FL, 422 COLLINS ST.
MELBOURNE 3000. PH: 67 9619
TELEX: AA30625 (ME 1830)

LIC Instruments

EA PRINTED CIRCUIT BOARDS & FRONT PANELS

We sell every PCB & FP as published from January 1985.
Ring for prices or send sae for price list.

JWD ELECTRONICS
P.O. BOX 341
RIVERSTONE NSW 2765
PHONE: (045) 73 6097

RCS RADIO PTY. LTD.

Established 1933
IS THE ONLY COMPANY
WHICH MANUFACTURES AND
SELLS EVERY PCB & FRONT PANEL
published in EA and ETI
651 Forest Road Bexley 2207
AUSTRALIA
RING (02) 587 3491 FOR INSTANT PRICES
24-HOUR TURNAROUND SERVICE

BUSINESSES FOR SALE

GOLDEN OPPORTUNITY: For self motivated Electronic Technician in Tax Free Vanuatu. \$A98,000 negotiable for large building. No charge for goodwill and advice. Contact advertiser Box 229, Port Vila.

ELECTRONIC BUSINESS: For sale in Sunny North Queensland, Sales and Service. Escape the hassle of city life and live in the relaxed north. No risk business, established 7 years, suitable for either salesperson or technician. Further details on application. W.I.W.O. \$45,000, includes approx \$20,000 stock. P.S. It's probably easier than you think to "Get away from it all". Contact us and we'll show you how. Phone (070) 51 3033, McMillan Real Estate, contact Joan Whalley.

48 HOUR PCB SERVICE

Single Sided 5c per cm²

Double Sided 9c per cm²

(Minimum 100cm²)

DRILLING (0.8mm) 2c per hole

Send artworks on film or transparency P&P \$2.00

J.W.D. ELECTRONICS

PO Box 341
Riverstone, NSW 2765
Phone (045) 73 6097

DISPLAY ADVERTS IN MARKETPLACE are available in sizes from a minimum of 2cm X 1 col rated at \$15 for a col cm. Ad sizes may be increased up to a maximum of 10 col cms.

CLASSIFIED RATES \$3.60 for 40 letters or part thereof per insertion payable in advance. Minimum 80 letters.

CLOSING DATE is six weeks prior to the on-sale date. Issues are on sale the first Monday of each month.

DO YOU WANT TO BE A RADIO AMATEUR?

The Wireless Institute of Australia, established in 1910 to further the interests of Amateur Radio, conducts a Correspondence Course for the A.O.C.P. and L.A.O.C.P. Examinations conducted by the Department of Communications. Throughout the Course, your papers are checked and commented upon to lead you to a successful conclusion. For further information, write to:

THE COURSE SUPERVISOR W.I.A. (N.S.W. DIVISION)

P.O. Box 1066
PARRAMATTA, N.S.W. 2150.

projects & circuits Number 3

Audio, Video Projects

Video Amplifier for Computers and VCRs; Video Enhancer; Vocal Cancellor; Stereo Simulator for Tuners and VCRs; Guitar Booster for Stereo Amplifiers.

Automotive Projects

Transistor-Assisted Ignition System; Breath Tester Checks Blood Alcohol Level; Low Fuel Warning Indicator; Speed Sentry for Cars; Audible Turn Signal Indicator.

Mains Power Control Projects

Musicolour; Photographic Timer; Driveway Sentry; Touch-Lamp Dimmer.


Power Supplies & Test Equipment

Battery Saver for Personal Portables; Dual Tracking ±22V Power Supply; 3½-Digit LCD Capacitance Meter; In-Circuit Transistor Tester.

Miscellaneous

Nail Finder; Portable 3½-Digit Heart Rate Monitor. 10 Year EA Project Index.

Available from "Electronics Australia", 140 Joynton Avenue, Waterloo, Sydney, 2017, **PRICE \$4.50** OR by mail order: Send cheque to "Electronics Australia", PO Box 227, Waterloo, 2017, **PRICE \$5.40**.

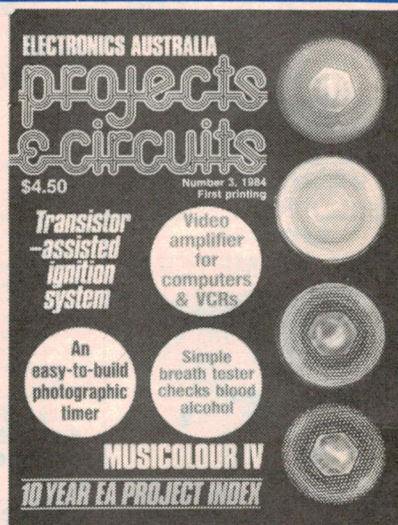


ELECTRONICS CENTRE

MAGNAVOX ... MAGNAVOX ... MAGNAVOX ...
LOOK ... ONLY \$19.50 FOR THIS TOP QUALITY 8 OHM

12" 30 WATT 4 WAY HI FI SPEAKER SYSTEM

OR \$35 PAIR

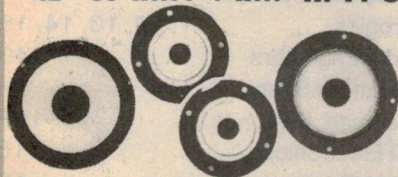

That's 8 Speakers ... 2 Woofers
• 2 Midrange • 4 Tweeters.

P-P NSW. 1 Set \$3. 2 Sets \$4.
INTERSTATE 1 Set \$5.50. 2 Sets \$7.

30 Watt Woofer has rolled foam surround and big Ferrite Magnet — extra good bass and nice clean highs. 3 way crossover network to suit. \$14.95 ea. Heavyweight innerbond acoustic packing \$4.95 sq m.

★ EXTRA SPECIAL MAGNAVOX ★

LATEST MODEL 12W MK6. 12" 25 WATT RMS
HI-FI WOOFER. FREQ 40-6000HZ. RESON. 45HZ. 4 OHMS.

\$17.50 EA. P-P NSW \$2.50 INTERSTATE \$3.50 **OR \$29.95 PAIR** P-P NSW \$3.50 INTERSTATE \$4.50

AND MORE MAGNAVOX SPECIALS

8J x 8" Twin Cone. Freq. 55-14000 Hz **\$6.95** 10WR. Twin Cone. Freq. 50-14,000 Hz. **\$12.95**
8 Ohms. 12 Watts. 15 Ohms. 25 Watts.
6W. MK6. Woofer. Freq. 55-6500 Hz. **\$12.95** 10W. Woofer. Freq. 40-5500 Hz. **\$10.95**
8 Ohms. 20 Watts. 15 Ohms. 25 Watts.

P-P NSW \$2.50 INTERSTATE \$4.00

UHF TUNING CAPACITOR

Matsushita 3-gang complete with hi-ratio slow motion drive mechanism • 1/4" shaft
• Assembled in little metal box
• 100x50x25mm.

\$4.95 P-P NSW \$1.50 INTERSTATE \$2.50

CONSTANT VOLTAGE • TRANSFORMER •

Sola. Harmonic Neutralized Type CVS.
Input 190-260V
Output 220V. 50Hz. 500VA.
Size 33x19x18cm. Wt 21kg.

\$125.00 PLUS FREIGHT

CRYSTAL 3.579545 MHz. Mini Solder in.

95c P-P 75c

500 METRES HOOK-UP WIRE

ON REEL 7/254 TINNED COPPER. PVC. BLUE WITH WHITE TRACE.

ONLY \$12.50 P-P NSW \$3.00 V. Q. T. SA \$6.50 NT, WA \$7.50

2SD200 = BU205 TRANSISTOR

NPN VCBO VCE 300V
750V • 3 AMPS

4 FOR \$3.75 P-P 75c

★ POWER TRANSFORMER SALE ★

**BRAND NEW — SOME TYPES
NOW RARE — BE QUICK**

ALL 240V 50HZ PRIMARY

No. 1. 0-12V. 1A. \$2.95	2x35V. 1A. 6.3V 5A. 6.3V. 1A. \$22.50	No. 19. FERGUSON LO PROFILE. 0-24V. 7.5VA. \$4.50
No. 2. 0-18V. 1.8A. \$4.95	P-P NSW \$4.50. INTERSTATE \$7.50	P-P NSW \$2.50. INTERSTATE \$4.00
No. 3. 12-0-12V. 5A. \$2.50	No. 15. C-CORE. 0-150V 300 MA. 6.3V 8A. \$12.50	No. 20. FERGUSON LO PROFILE. 18-0-18V. 10-0-10V. 40VA. \$12.50
No. 4. 0-38V. 2A. \$4.95	P-P NSW \$3.50. INTERSTATE \$5.50	P-P NSW \$3.50. INTERSTATE \$5.50
No. 5. 34-0-34V. 1.5A. \$4.50	No. 16. C-CORE. 115V-0-115V. 300MA. 6.3V 4A. 15V. CT. 5A. \$9.50	No. 21. 285-0-285V. 150MA. 6.3V 4A. 5V. 3A. \$27.50
No. 6. 0-12V 1.8A. \$4.50	P-P NSW \$3.50. INTERSTATE \$5.50	P-P NSW \$4.50. INTERSTATE \$7.50
No. 7. 0-3V. .3A Plugpak. \$1.50	No. 17. A. AND R. 0-20. 30. 48V. 2A. \$9.95	No. 22. 0-130V. 150MA. 6.3V. 4A. \$9.50
No. 8. 0-40V. 200MA. \$1.75	P-P NSW \$3.50. INTERSTATE \$5.50	P-P NSW \$3.50. INTERSTATE \$5.50
No. 9. 0-18V. 2A 6.3V 1A. \$2.50	No. 18. FERGUSON LO PROFILE. 0-12V. 7.5 VA. \$3.95	No. 23. 0-130V. 100MA. 6.3V. 3A. \$8.00
No. 10. 32-0-32V. 2A. \$4.95	P-P NSW \$2.50. INTERSTATE \$4.00	P-P NSW \$3.50. INTERSTATE \$5.50
No. 11. 0-35V. 200MA. \$1.75		
No. 12. 0-20V. 1.5A. \$3.50		
P-P NSW \$2.50. INTERSTATE \$3.50		
No. 13. 0-6.5V. TAP 16.5. 26.5. 33V. 200VA. \$19.50		
P-P NSW \$4.00. INTERSTATE \$6.00		
No. 14. 0-285V. 250 MA.		

50 WATT RMS SPEAKERS

FOR **\$39.95 PAIR** OR \$22.50 EA.

ETONE FACTORY SCOOP.

30cm 8 Ohm Hi-Fi Woofer. Rugged Top Quality with Warranty. Foam Surround. 3.5cm V.C. Hefty Ferrite Magnet. Freq. Response. 35-4500 Hz.

P-P NSW for one, \$3.50. Interstate, \$5.00. P-P NSW for two, \$5.00. Interstate, \$7.00.

V.H.F. HI-BAND RF AMPLIFIER



25 Watts • Solid State 2N5591. 13.8V DC. Integrally mounted on hi power heat sink.

\$29.95 P-P NSW \$2.50 INTERSTATE \$3.50


TUNING CAPACITOR



3 gang, 60PF, 200PF AND 415PF. IDEAL for A.T.U., etc. Top quality. Ball bearings. 55x45x40mm.

\$5.75 P-P NSW \$2.00 INTERSTATE \$2.75

INTEGRATED CIRCUITS



TYPE 6802P **\$3.50**
TYPE 6821 **\$1.95**
TYPE 2708 **\$3.95**


A1 QUALITY TRANSISTORS 2N3055

10 FOR \$6. P-P \$1.50

2SC935 = BU 126 TRANSISTOR

NPN VCBO VCE 300V
750V • 3 AMPS
4 FOR \$4 P-P 75c

TEXAS TIL 139



Source and Sensor Assembly • Gallium arsenide LED and PNP silicone photo transistor • Can be PCB mounted.

P-P \$2

75c EACH 10 FOR \$6.00

DIODES

IN 4004. 400 piv 1 AMP IN 5404. 400 PIV 3 AMP

50 FOR \$2.50 50 FOR \$7.50

M9775 650 PIV 3 AMP

50 FOR \$9.50

P-P NSW 80c. INTERSTATE \$1.20.

REGULATORS

7812. + 12V 1A
7805 + 5V. 7905 - 5V 1A

10 MIXED \$6. P-P \$1.50



TIMER 555

10 FOR \$2.95 P-P \$1.50

HIGH GRADE POTTER AND BRUMFIELD RELAY



P-P 95c

KU series • 240 VAC 50Hz operation • 3 sets of 240V 10 amp change over contacts • perspex cover and mounting base included • size 50mm x 37mm x 35mm • ex-computer • as new condition. At less than 1/3 of the normal price.

MJE 350 TRANSISTORS


PNP. 300V .5A
10 FOR \$3.50 P-P \$1.50

★ HIGH GRADE ELECTROLYTICS ★ FRESH AS A DAISY

8000µF 75V DCW 4000µF 75V DCW 10,000µF 40V P-P NSW \$2.00 INTERSTATE \$3.50
2 FOR \$9.75 2 FOR \$5.75 2 FOR \$7.00
CHASSIS MT CHASSIS MT PCB MT
4700µF 35V 4700µF 16V
AXIAL 4 FOR \$7.90 AXIAL 4 FOR \$5 P-P NSW \$1.50 INTERSTATE \$2.50

THE NEWEST INVENTION SINCE ALADDIN'S LAMP

TOP VALUE
AT ONLY
\$3.95
NZ\$4.50

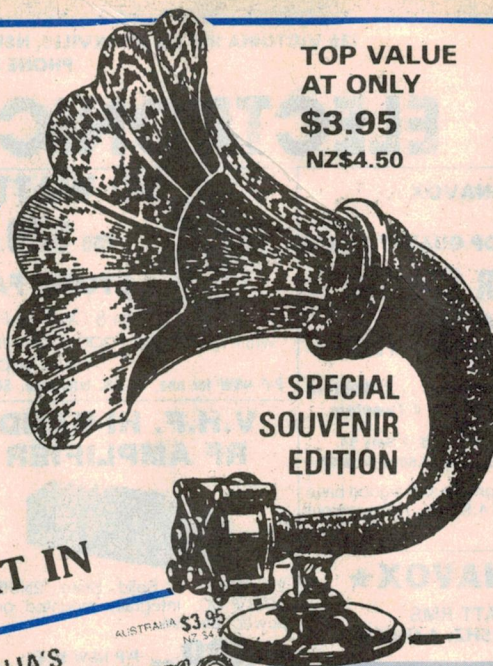

**SPECIAL
SOUVENIR
EDITION**

**READ
ALL ABOUT IT IN**



A TRULY NOSTALGIC TRIP INTO AUSTRALIA'S WIRELESS PAST

AT YOUR NEWSAGENT NOW

THE FEDERAL PUBLISHING COMPANY

PO BOX 227, WATERLOO 2017

ADVERTISING INDEX

ADVERTISER	PAGE
Ace Radio	119
Acetronics PCBs	28
Active Electronics	insert
Altronic	11, 12, 13, 14, 15
Audio Engineers	40
Cashmore Sound	74
Chapman, L.E.	117
CQ Electronics	118
C & K Electronics	56
Commodore Business Machines	94
Daneva Australia	59
David Read Electronics	80
Delsound	29
Dick Smith	IFC, 7, 9, 60, 61, catalogue
Disco World	93
Electronic World	33
Electronics Australia	32, 49, 67, 88, 118, 120
Elmeasco Instruments	IBC
Emona Instruments	84
Emtronics	109
Falk Electrosound Group	40
Federal Publishing Co	73, 86, 91, 120
Ferguson Transformers	102
Geoff Wood Electronics	71
Icom	81
Jaycar Electronics	24, 25, 52, 53 104, 105
JWD Electronics	118
Kalextronics	107
Kellergraphics	67
LIC Instruments	118
Microtrix	110
Neotronics	44
Odyi Communications	OBC
Parameters	37
Promark	90, 91
Pulsar Electronics	108
Radio Despatch Service	57
RCS Radio	118
Rod Irving Electronics	19, 46 76, 97
Royston Electronics	75
Scientific Devices	99
Sheridan Electronics	101
Siemens Ltd	2
Soanar Electronics	109
Stotts Correspondence College	21
Warburton Franki	111
Wireless Institute of Australia	118

FROM HOBBYIST TO PROFESSIONAL – FLUKE MUST BE YOUR FIRST MULTIMETER CHOICE FOR FEATURES, QUALITY AND VALUE



FLUKE MULTIMETERS CARRY A ONE YEAR MINIMUM WARRANTY AND ARE BACKED BY COMPREHENSIVE SPARE PARTS, CALIBRATION AND SERVICE

1 8050A

- 4½ digit bench portable • 0.03% basic accuracy • 10µV, 10nA, 10mohm sensitivity • True RMS to 50kHz • dB with 16 reference impedances • Relative reference for comparing values • Mains/Battery option

8010A 8012A (similar to 8050A)

- 8010A has 10A range and true RMS • 8012A has low ohms (0.001ohm resolution) • Both have conductance • Mains/Battery option

2 8020B

- 3½ digit • 0.1% basic accuracy • Eight functions including conductance • Continuity beeper

3 8021B 8022B

- 3½ digit • 0.25% basic accuracy • Diode test • Continuity beeper (8021B only)

4 8024B

- 3½ digit • 0.1% basic accuracy • 11 functions including temperature with K type thermocouples • Peak hold on voltage and current • Logic detection and continuity testing • Audible and visible indicators

5 8026B

- 3½ digit • 0.1% basic accuracy • True RMS to 10kHz • Conductance to 10,000Mohm • Diode test and continuity beeper

6 8062A

- 4½ digit • 0.05% basic accuracy • Similar to 8060A without counter and dB • Relative reference • True RMS to 30kHz

7 8060A

- 4½ digit • 0.05% basic accuracy • True RMS to 100kHz • Frequency counter to 200kHz • dB and relative dB • Microprocessor self diagnostics • Relative reference for comparing values • Direct resistance to 300Mohm

LOW COST 70 SERIES WITH ANALOG & DIGITAL DISPLAY

**3 YEAR
WARRANTY**

8 73

- 3200 count display • 32 segment bar graph • 18 ranges • Automatic power down • 10A current range • Autorange • 0.7% basic accuracy • 2000 hour battery life

75

- All the features of the 73 plus: • Audible continuity tester • Autorange/Range hold • 0.5% basic accuracy • Low mA range

77

- All the features of the 75 plus: • Touch Hold function • 0.3% basic accuracy • Multipurpose protective holster

ACCESSORIES INCREASE THE VERSATILITY OF YOUR FLUKE MULTIMETER

An extremely wide range of accessories is available for your Fluke multimeter.

SOLD & SERVICED IN AUSTRALIA BY

ELMEASCO

Instruments Pty. Ltd.

Elmeasco Instruments Pty Ltd – incorporated in N.S.W.

NEW SOUTH WALES

15 Macdonald Street,
MORTLAKE
P.O. Box 30, CONCORD
NSW 2137
Tel: (02) 736 2888
Telex: AA25887

VICTORIA

12 Maroondah Highway,
RINGWOOD
P.O. Box 623, RINGWOOD
VIC 3134
Tel: (03) 879 2322
Telex: AA36206 ELMVIC

QUEENSLAND

243 Milton Road,
MILTON
P.O. Box 2360, BRISBANE
QLD 4001
Tel: (07) 369 8688
Telex: AA44062


SOUTH AUSTRALIA

99 King William Street,
UNLEY
P.O. Box 1240, ADELAIDE
SA 5001
Tel: (08) 271 1839
Telex: AA88160


WESTERN AUSTRALIA

20 Barcomb Way,
GOSNELLS
P.O. Box 95, GOSNELLS
WA 6110
Tel: (09) 398 3362


It's more than an editor. More than an image enhancer. More than a duplicator. More than a mixer and more than a special effects generator.




VERTICAL WIPE




CORNER WIPE




3 SIDED WIPE




HORIZONTAL WIPE




CONVERGING FROM 4 SIDES



CONVERGING FROM 2 SIDES



CORNER WIPE FROM TOP




FADE TO BLACK

Before the Hybrid 8 was created you needed several separate components strung together with a lot of connector cables to do just some of what this remarkable multi processor can do. The Hybrid 8 is a complete video editing, viewing and duplicating system that gives home video the quality than normally comes from expensive studio equipment. Here are just a few of the system's capabilities.

Add fades, wipes, credits, special effects to home movies. Eliminate snow and static. Make dubs as good as (and sometimes better than) the original.

Make up to 3 stereo dubs at one time. Works with both VHS and Beta. 12 months warranty. Edit from 2 video sources. Add music to your movies. Fade in pictures and sound with total control. A fraction of the cost of a system built up of separate components. **\$998**

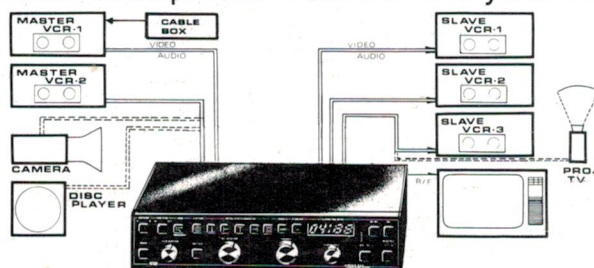

Leads not included.

The Hybrid 8 home video master control.

Victoria Templestowe: Odyl Communications Pty. Ltd. Phone: (03) 846 3022. Albert Park: VMS Phone: (03) 690 5677. New South Wales Sydney: Kent Hi Fi. Phone: (02) 267 2400 Sans Souci: VMS Phone: (02) 529 5700 South Australia Adelaide: Ford Electrical. Phone: (08) 223 5944 Prospect: VMS Phone: (08) 344 9688 Western Australia Perth: VMS Phone: (09) 275 6358. If your local video specialist doesn't have supplies of the Hybrid 8, phone Odyl Communications Pty. Ltd., Melbourne, on (03) 846 3022. Trade enquiries welcome. Concord/1082